



WATERPROOF



DIGITAL WALL TILES  
Exclusive series

PRODUCT CATALOGUE


Glossy  
Elevation  
Series

300 x 450mm



**ELE-540**



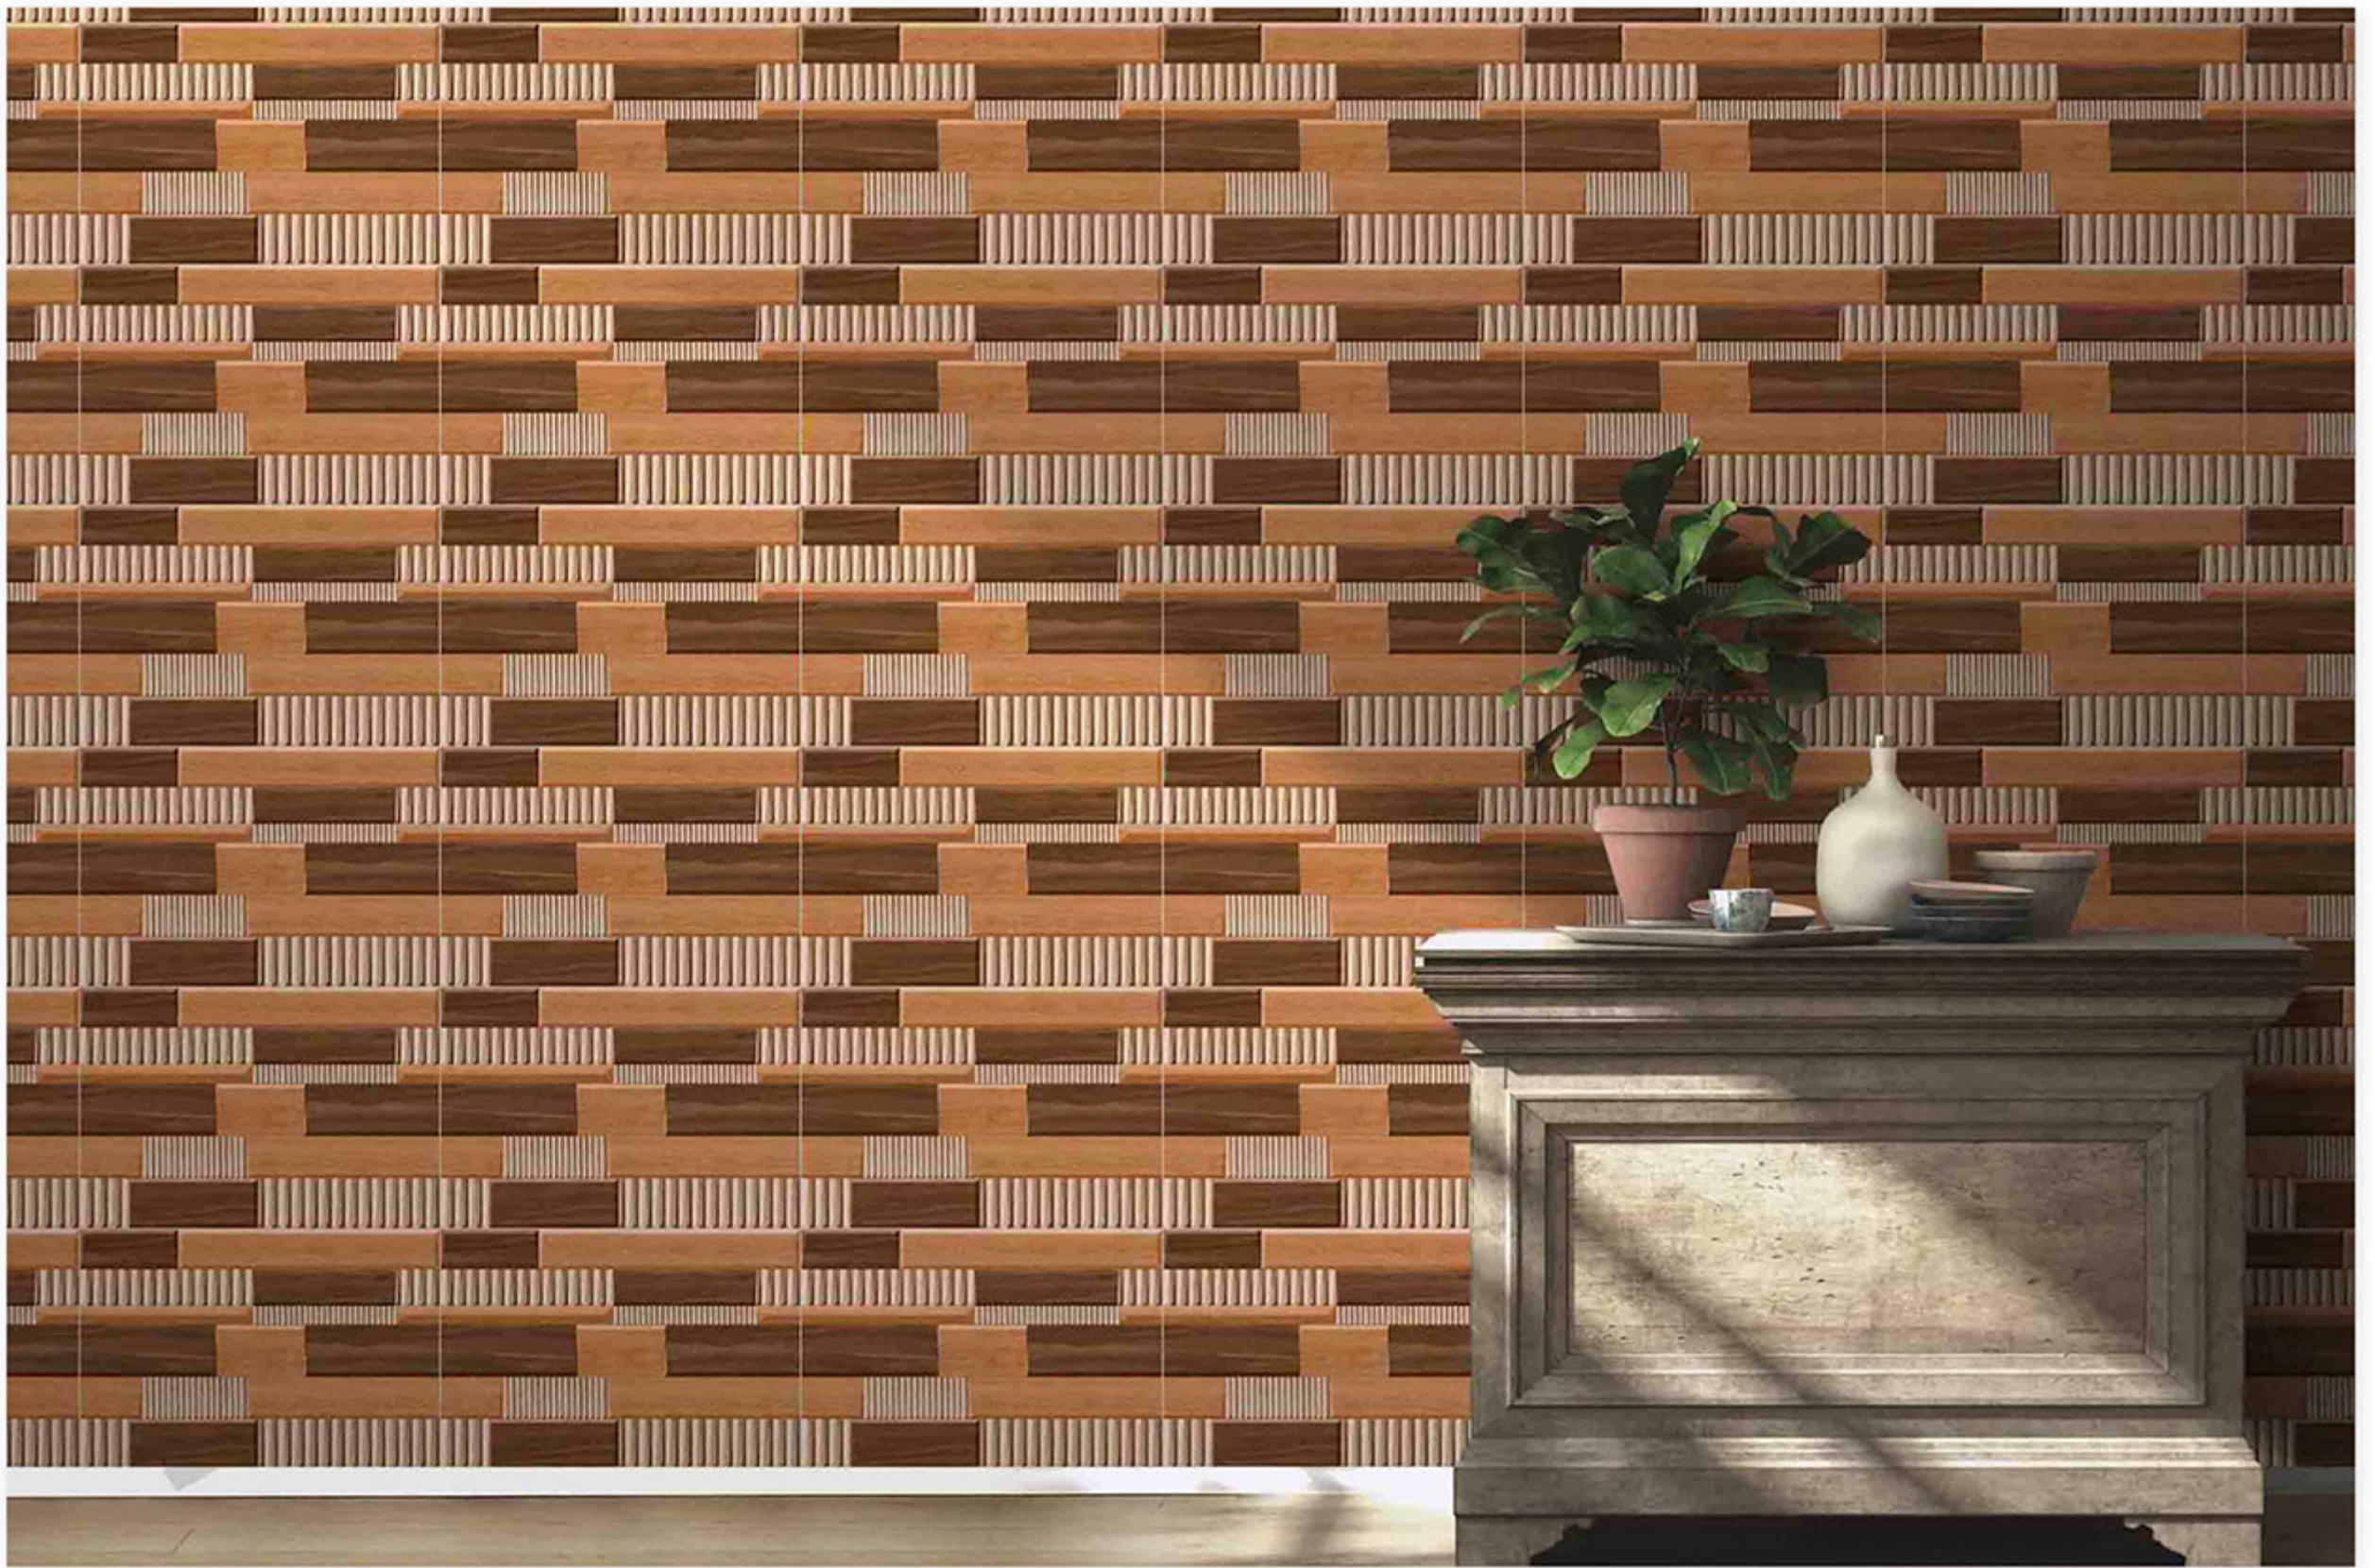

**ELE-541**







**ELE-542**



WATERPROOF



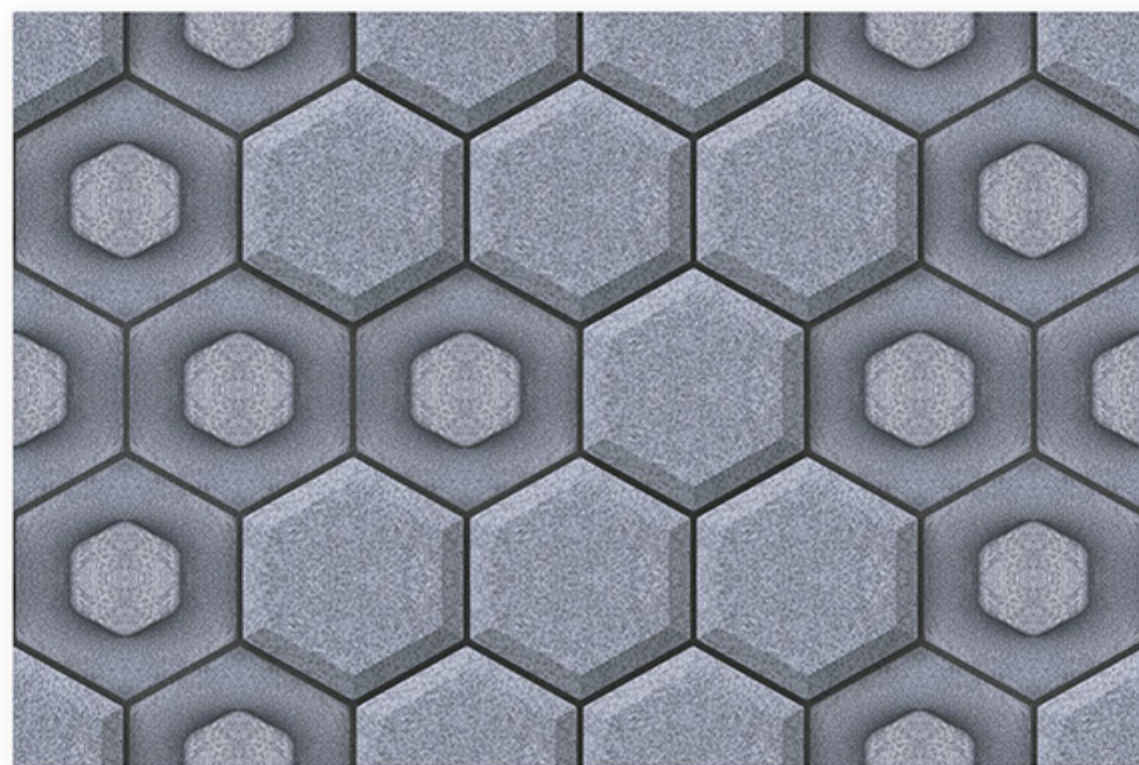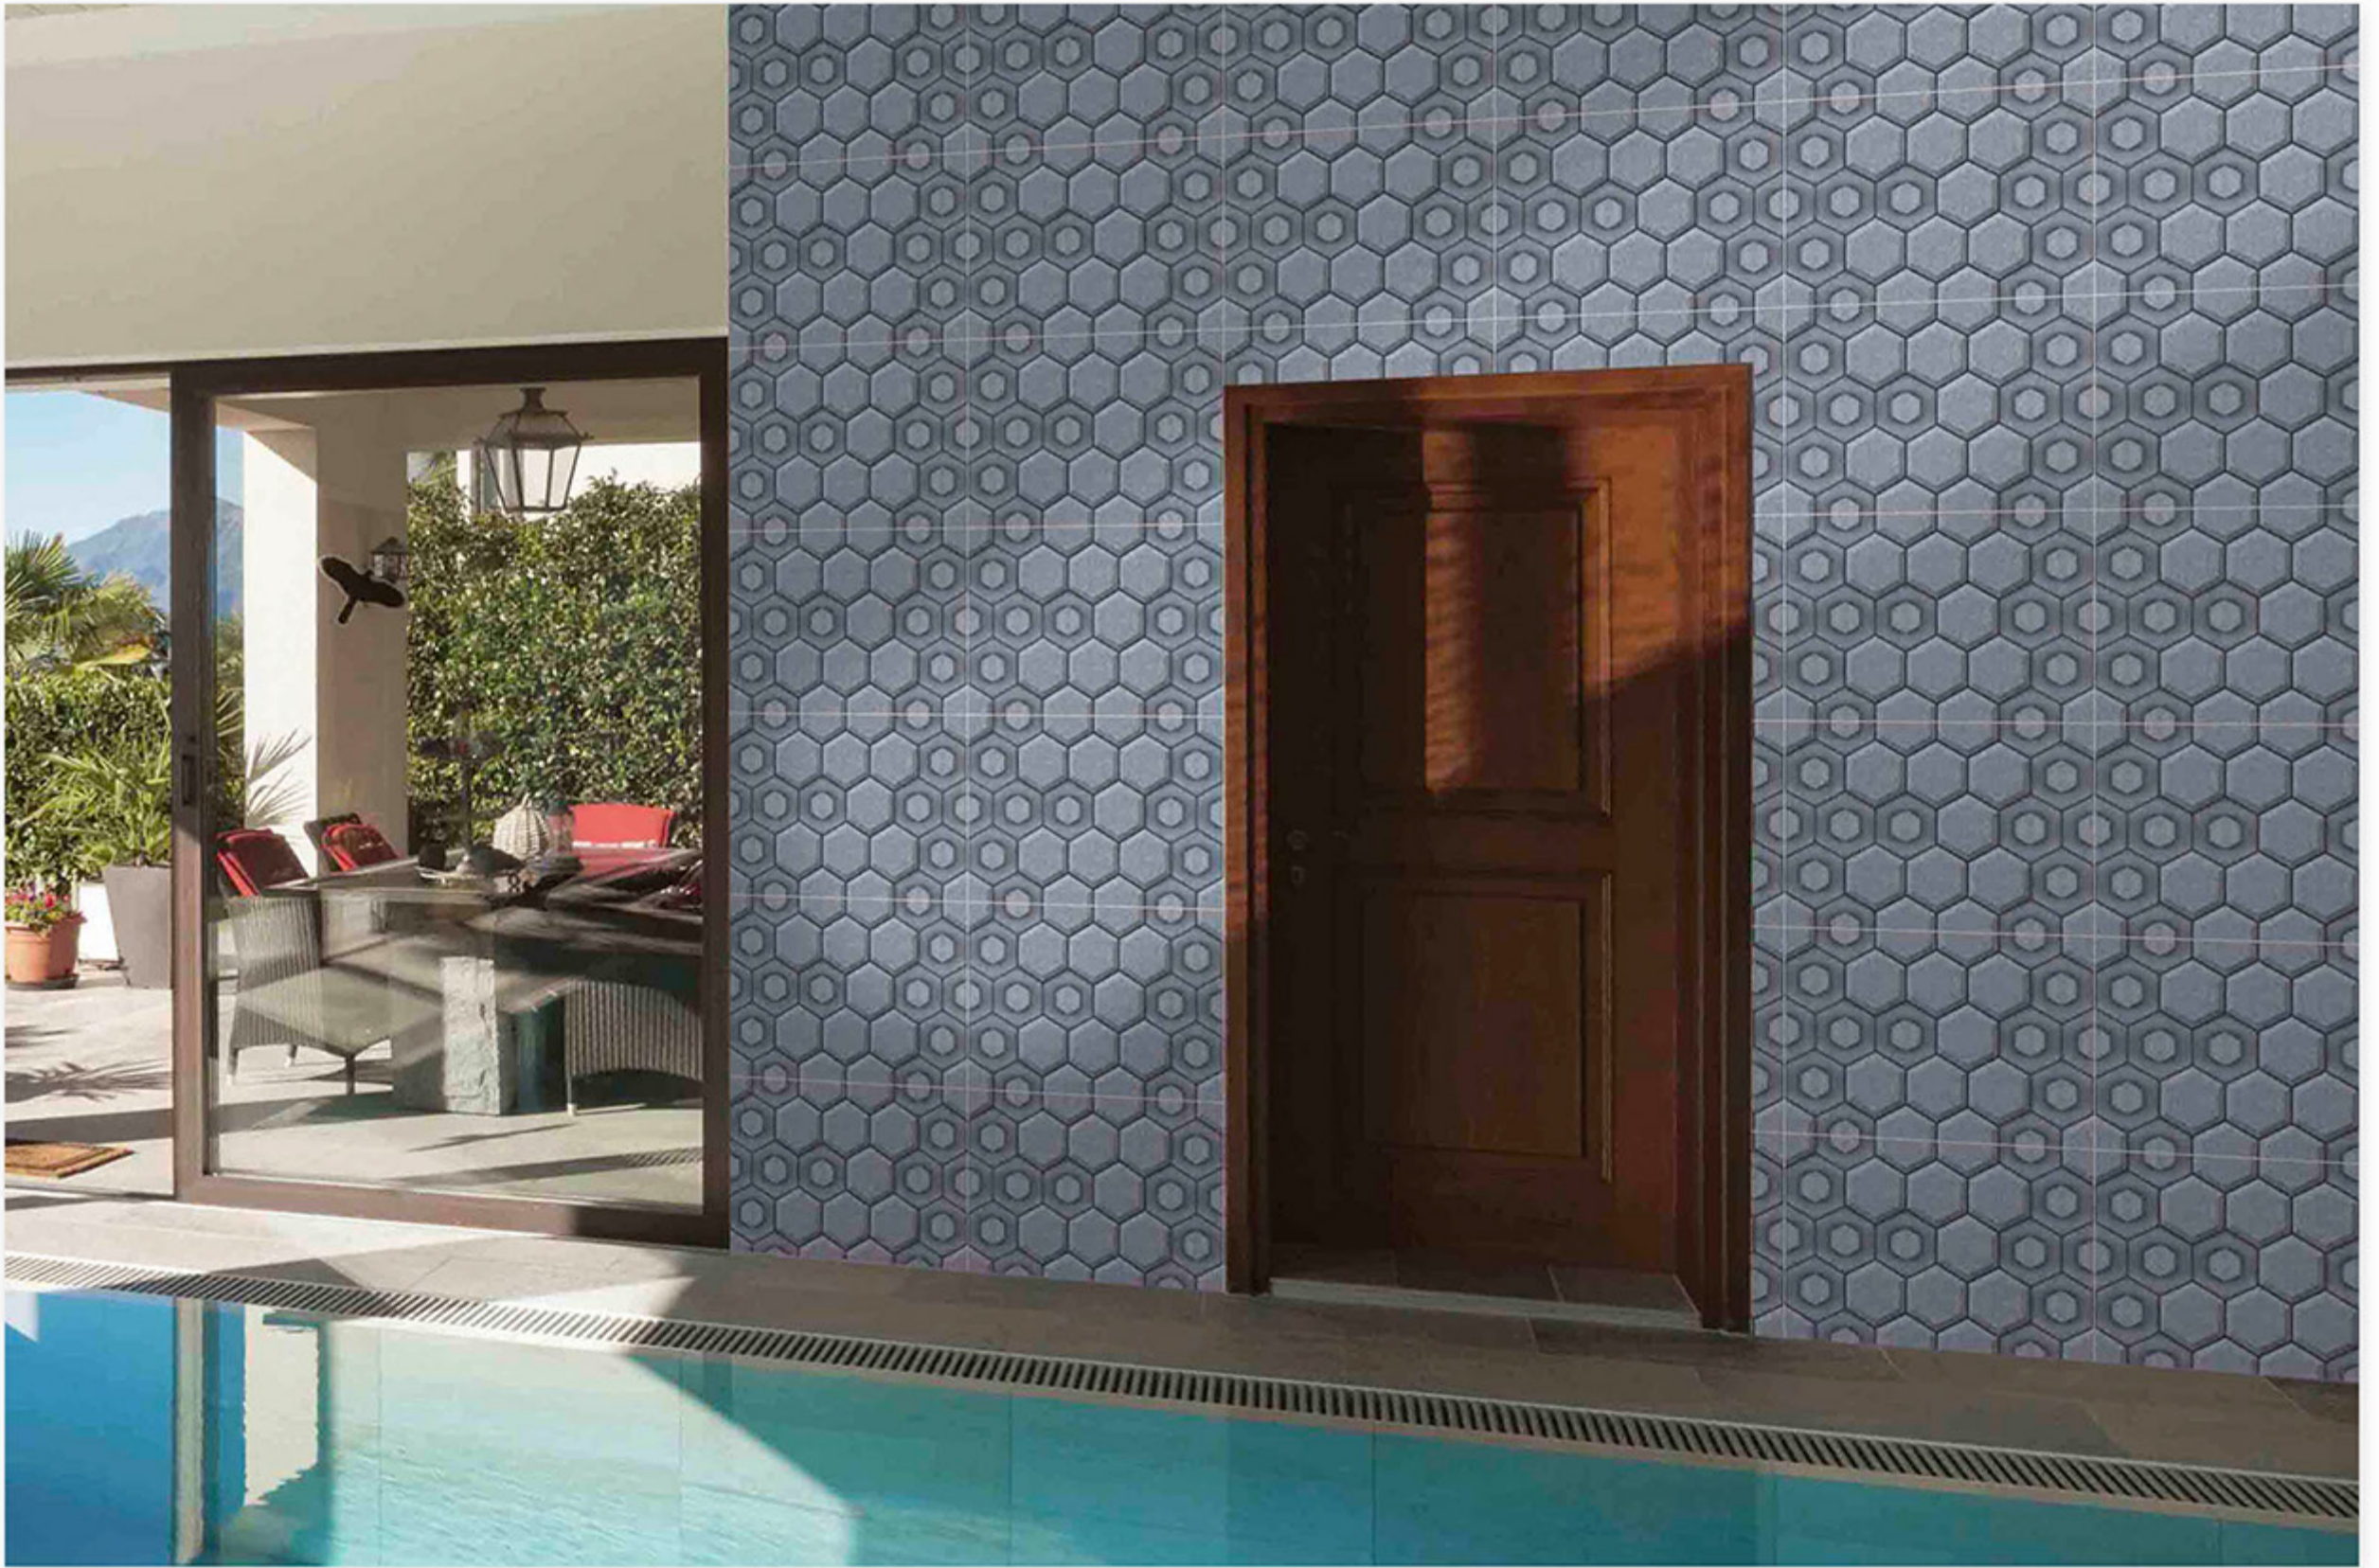

**ELE-543**





**ELE-544**




WATERPROOF





**ELE-545**



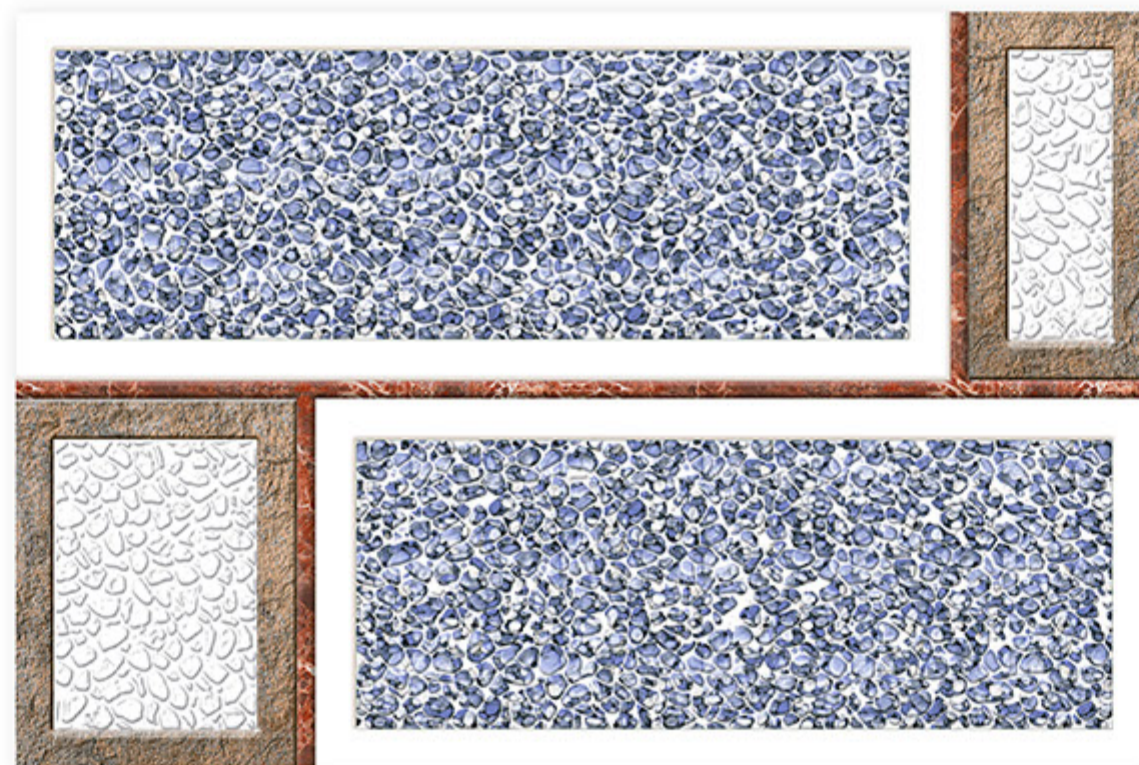

**ELE-546**






**ELE-547**




WATERPROOF



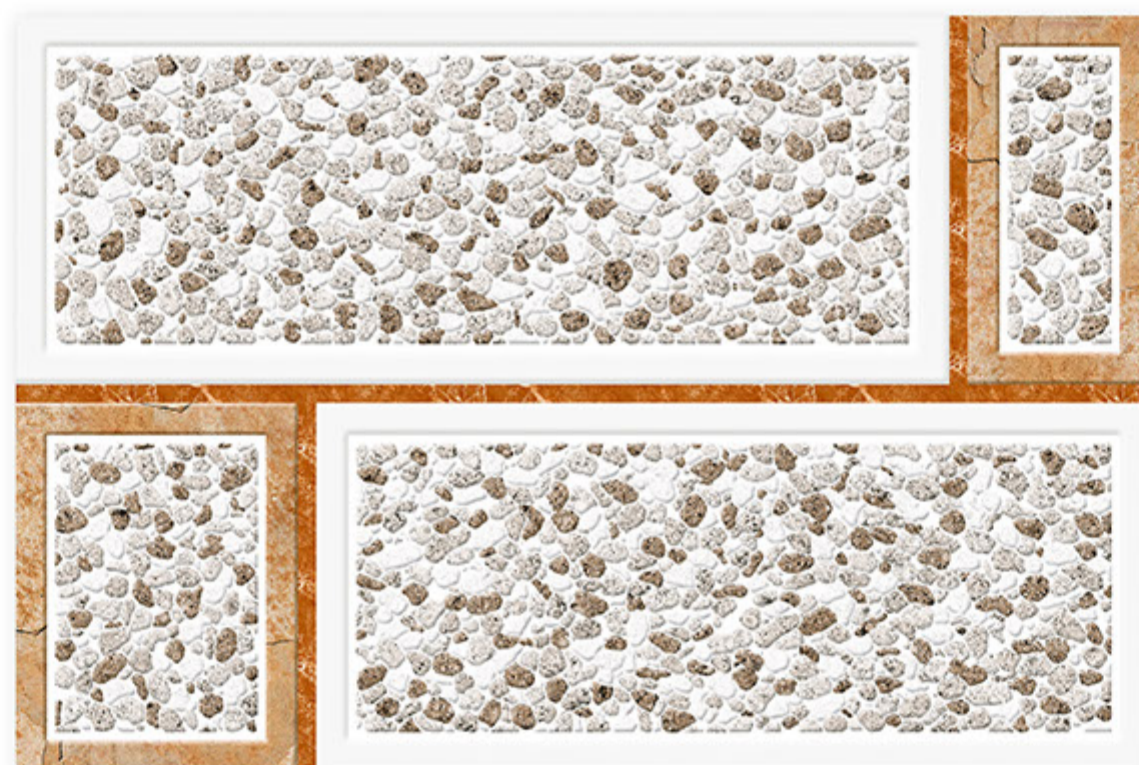


**ELE-548**



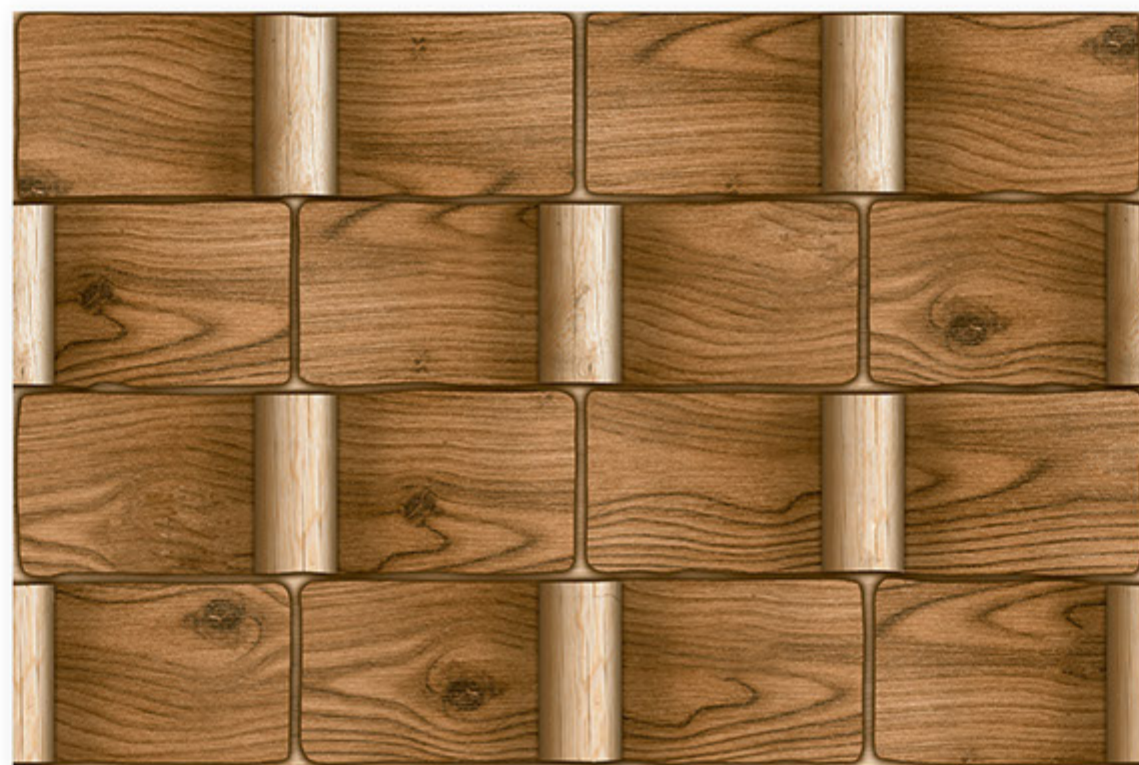

**ELE-549**



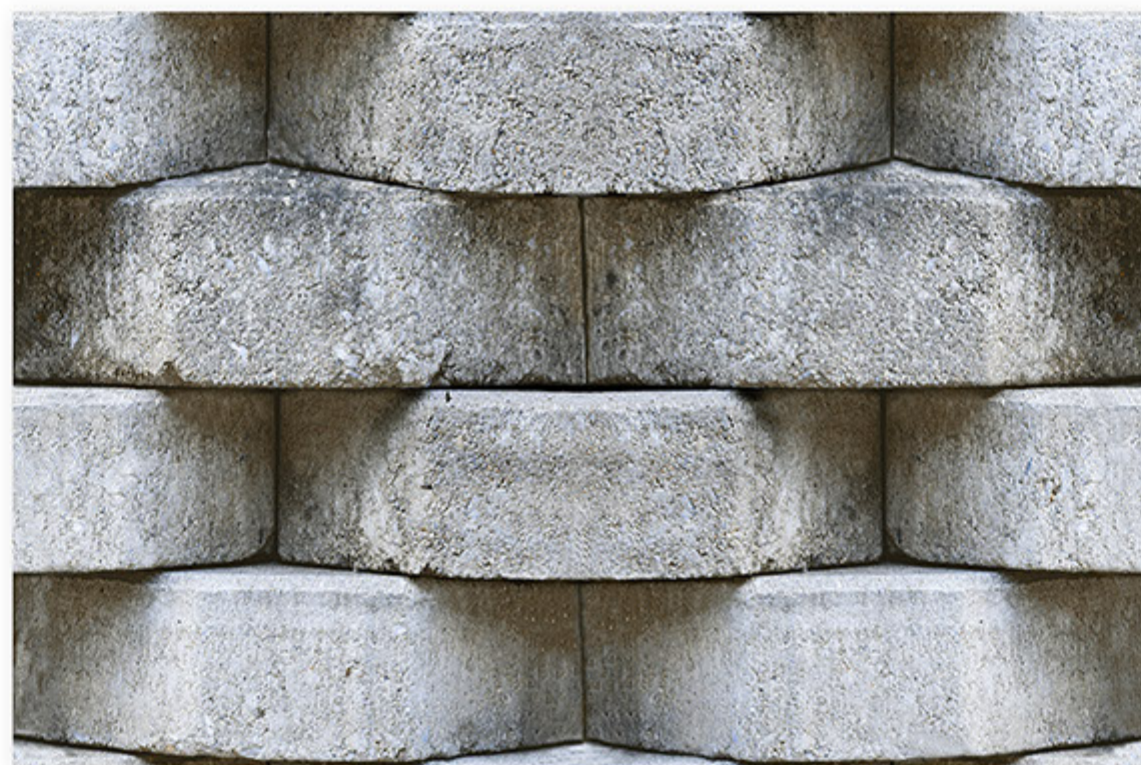

**ELE-550**



WATERPROOF





**ELE-551**





**ELE-552**



WATERPROOF





**ELE-553**





**ELE-554**



WATERPROOF







**ELE-555**





**ELE-556**



WATERPROOF





**ELE-557**





**ELE-558**







**ELE-559**






**ELE-560**



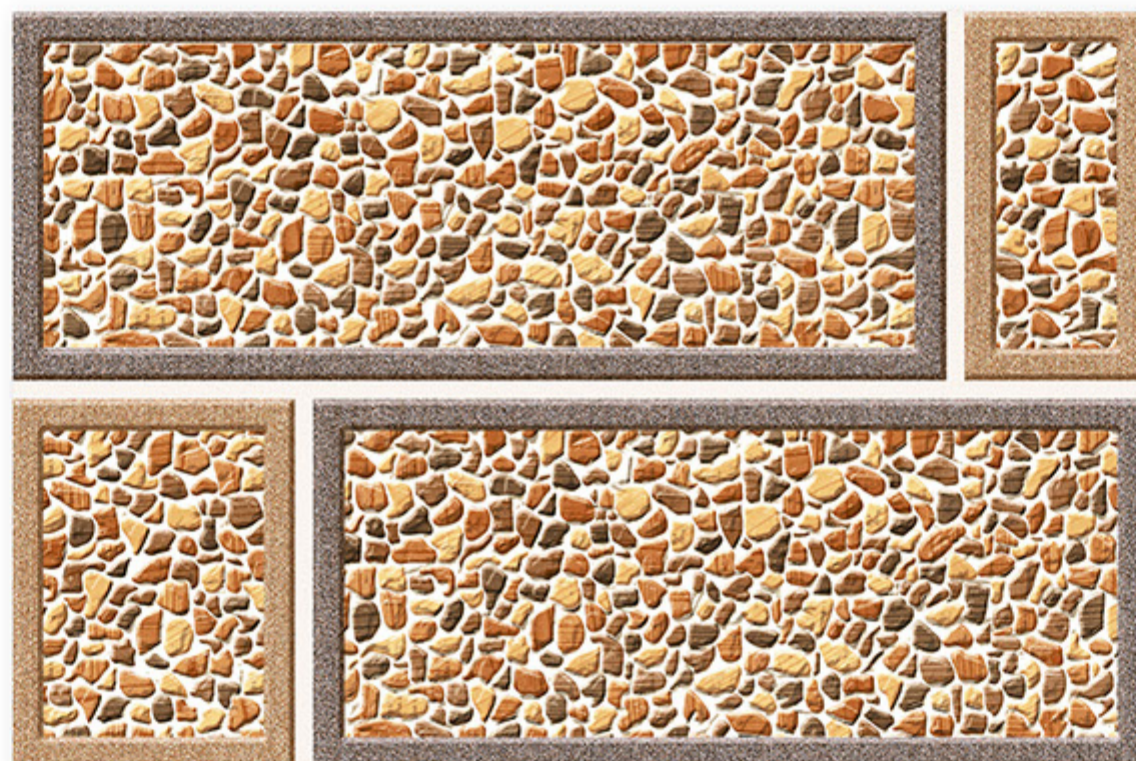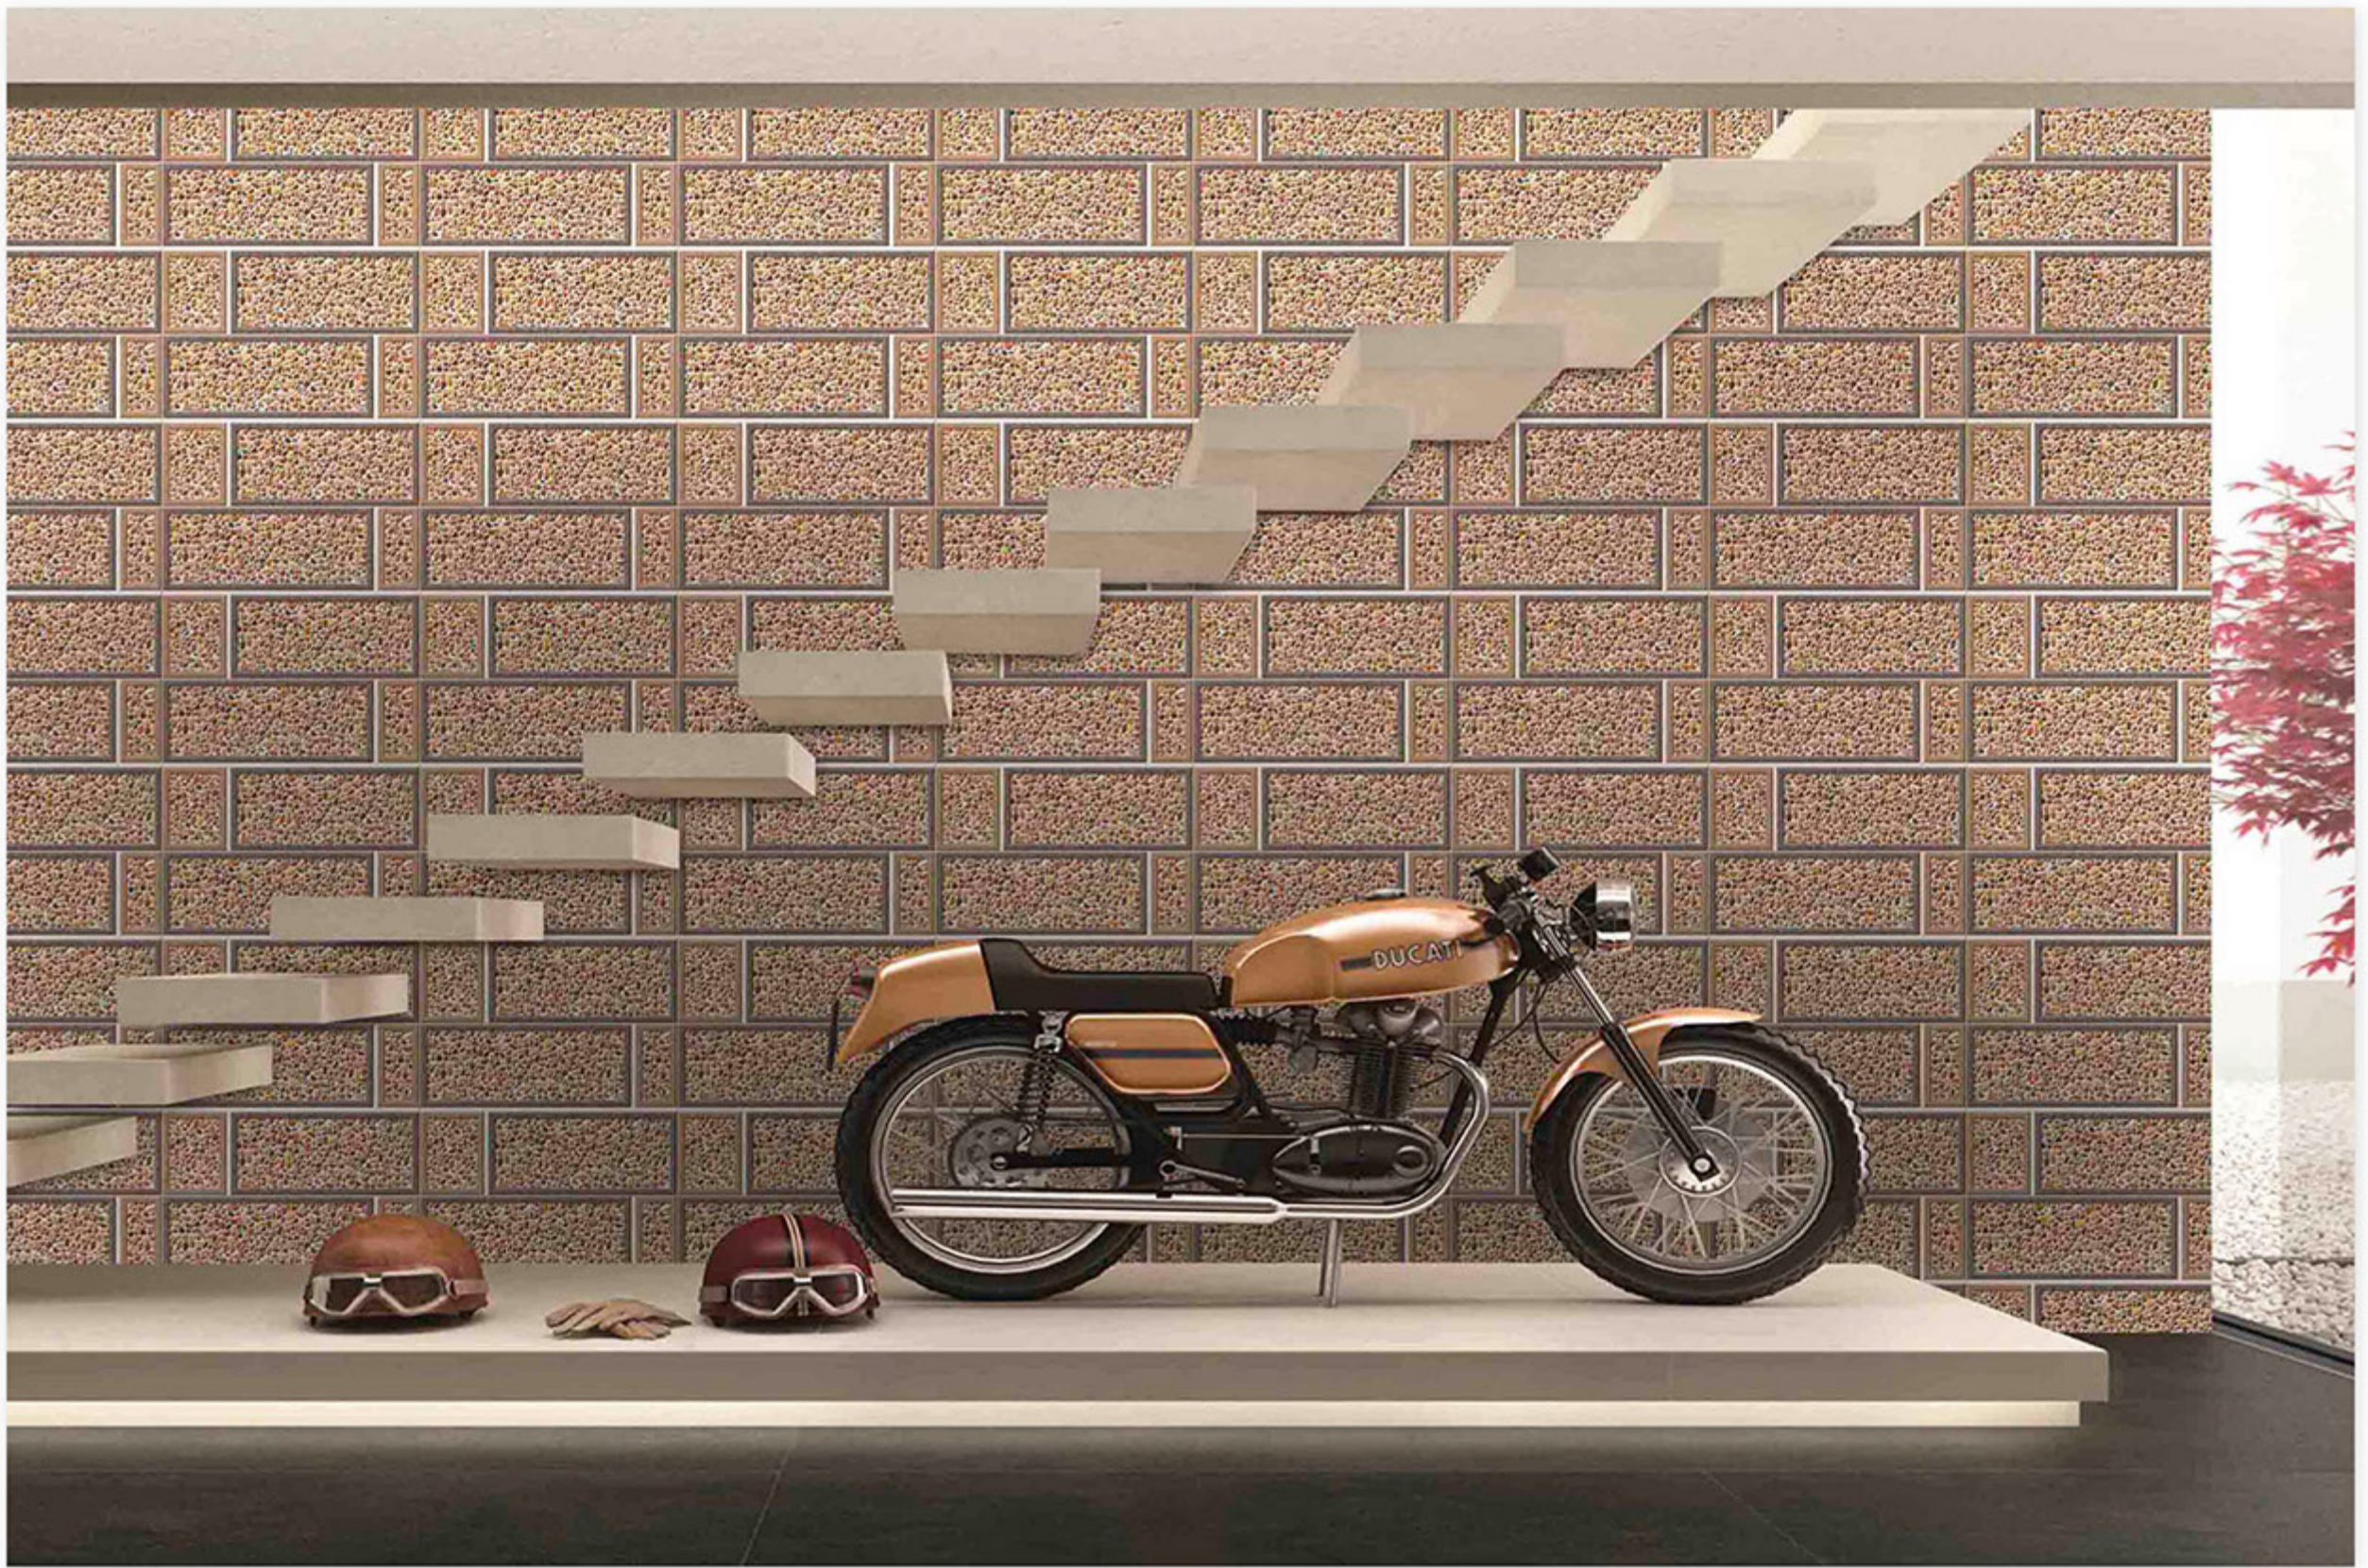

**ELE-561**



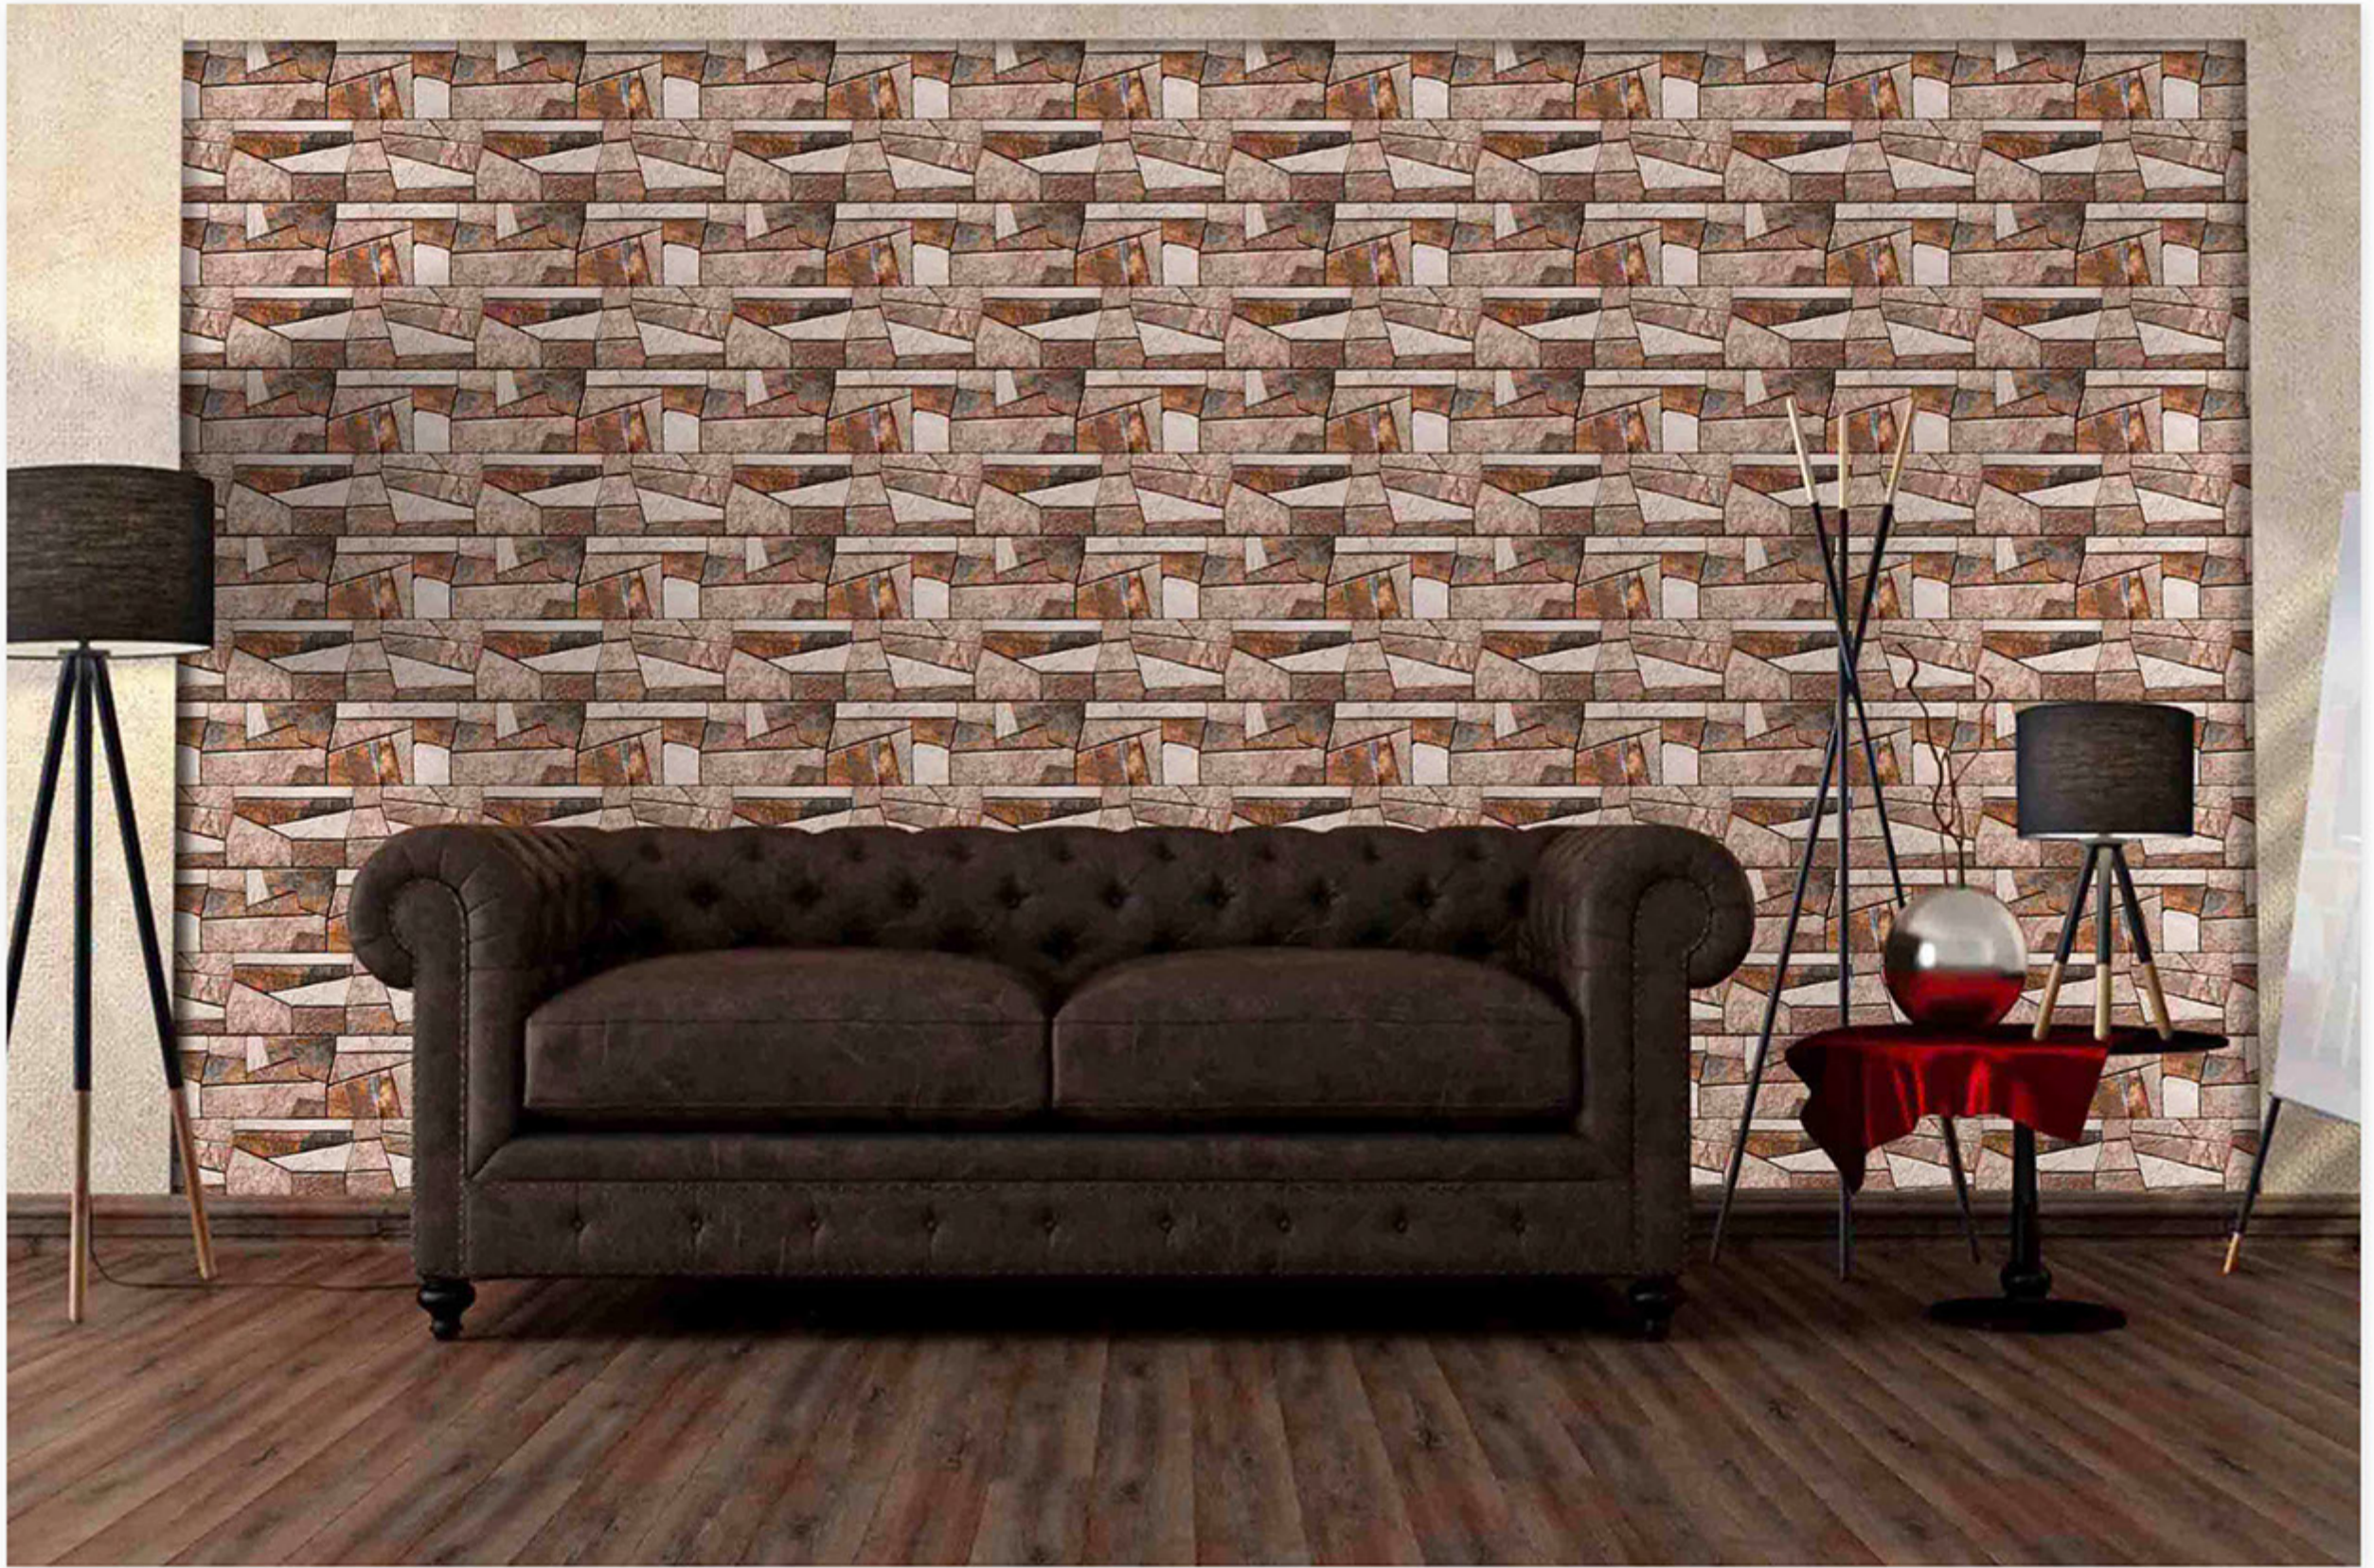


**ELE-562**



WATERPROOF





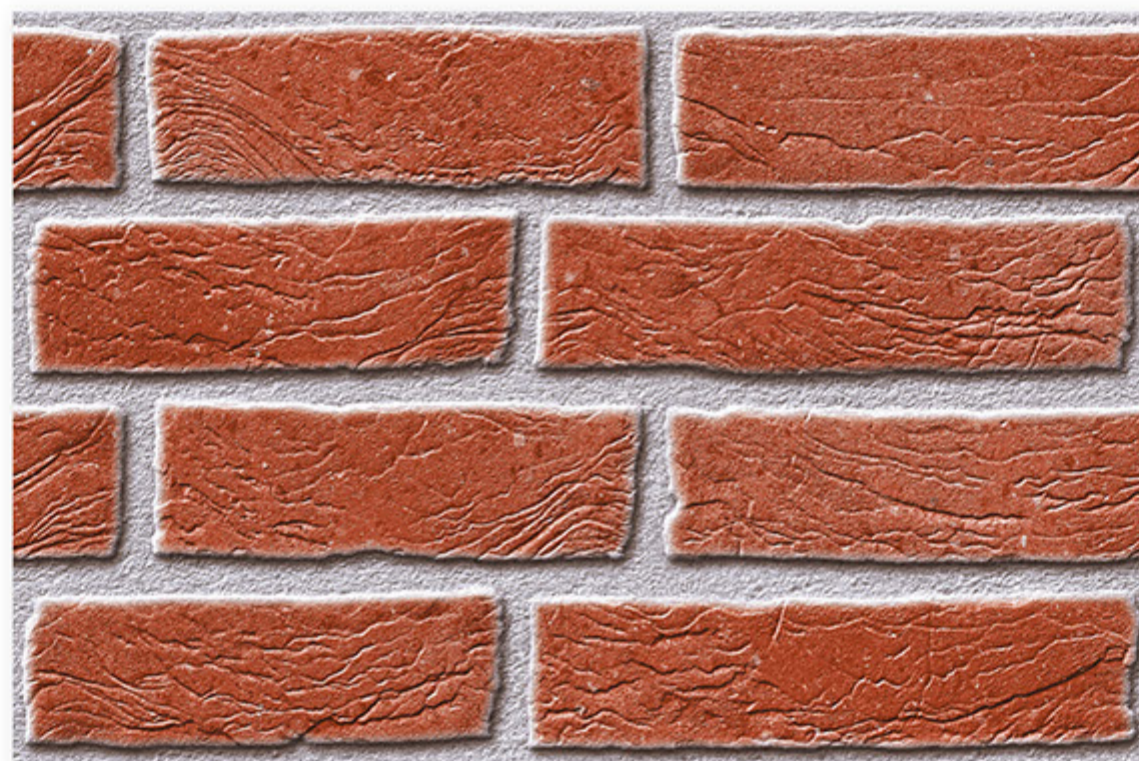

**ELE-563**





**ELE-564**





**ELE-565**



WATERPROOF





**ELE-566**



WATERPROOF






**ELE-567**



WATERPROOF



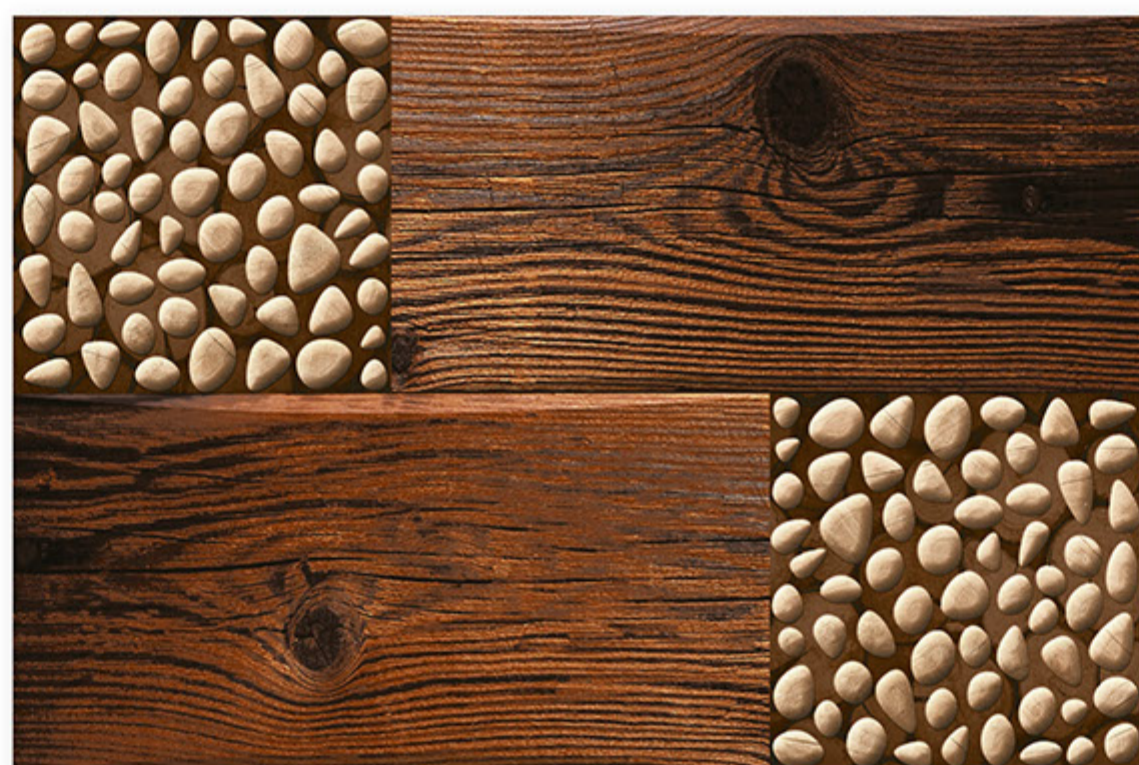

**ELE-568**





**ELE-569**






**ELE-570**





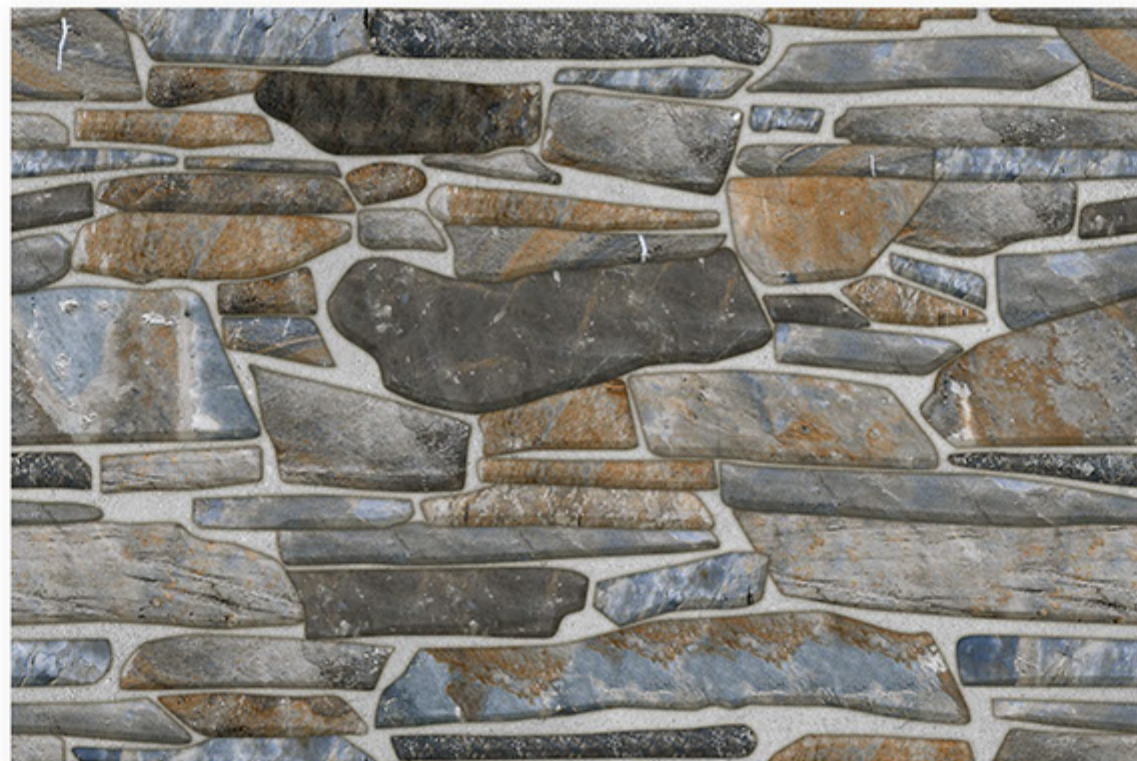

**ELE-571**




WATERPROOF





**ELE-572**



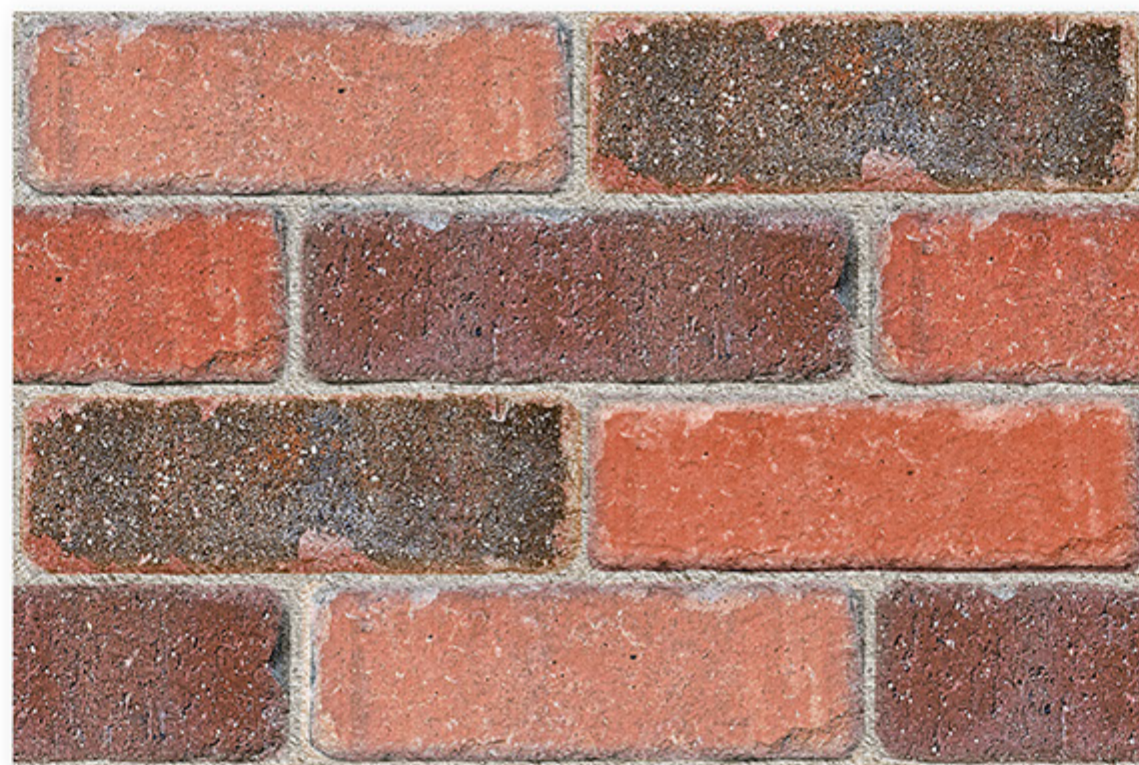

**ELE-573**





WATERPROOF





**ELE-576**



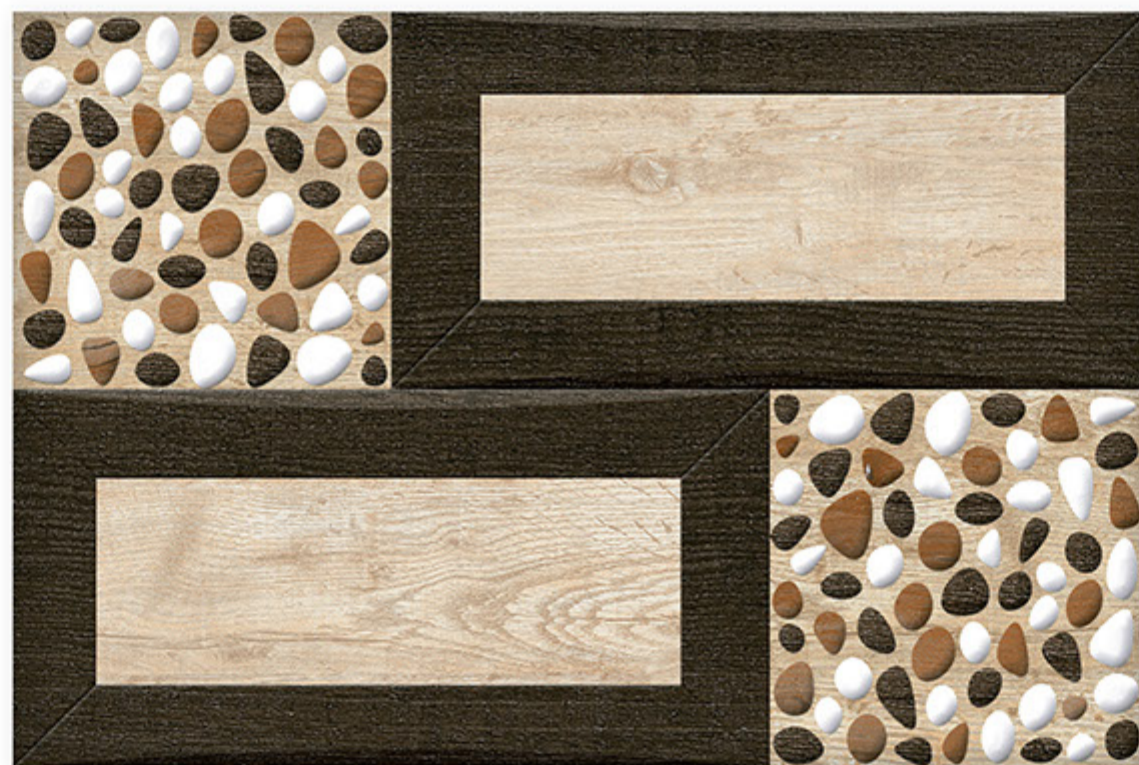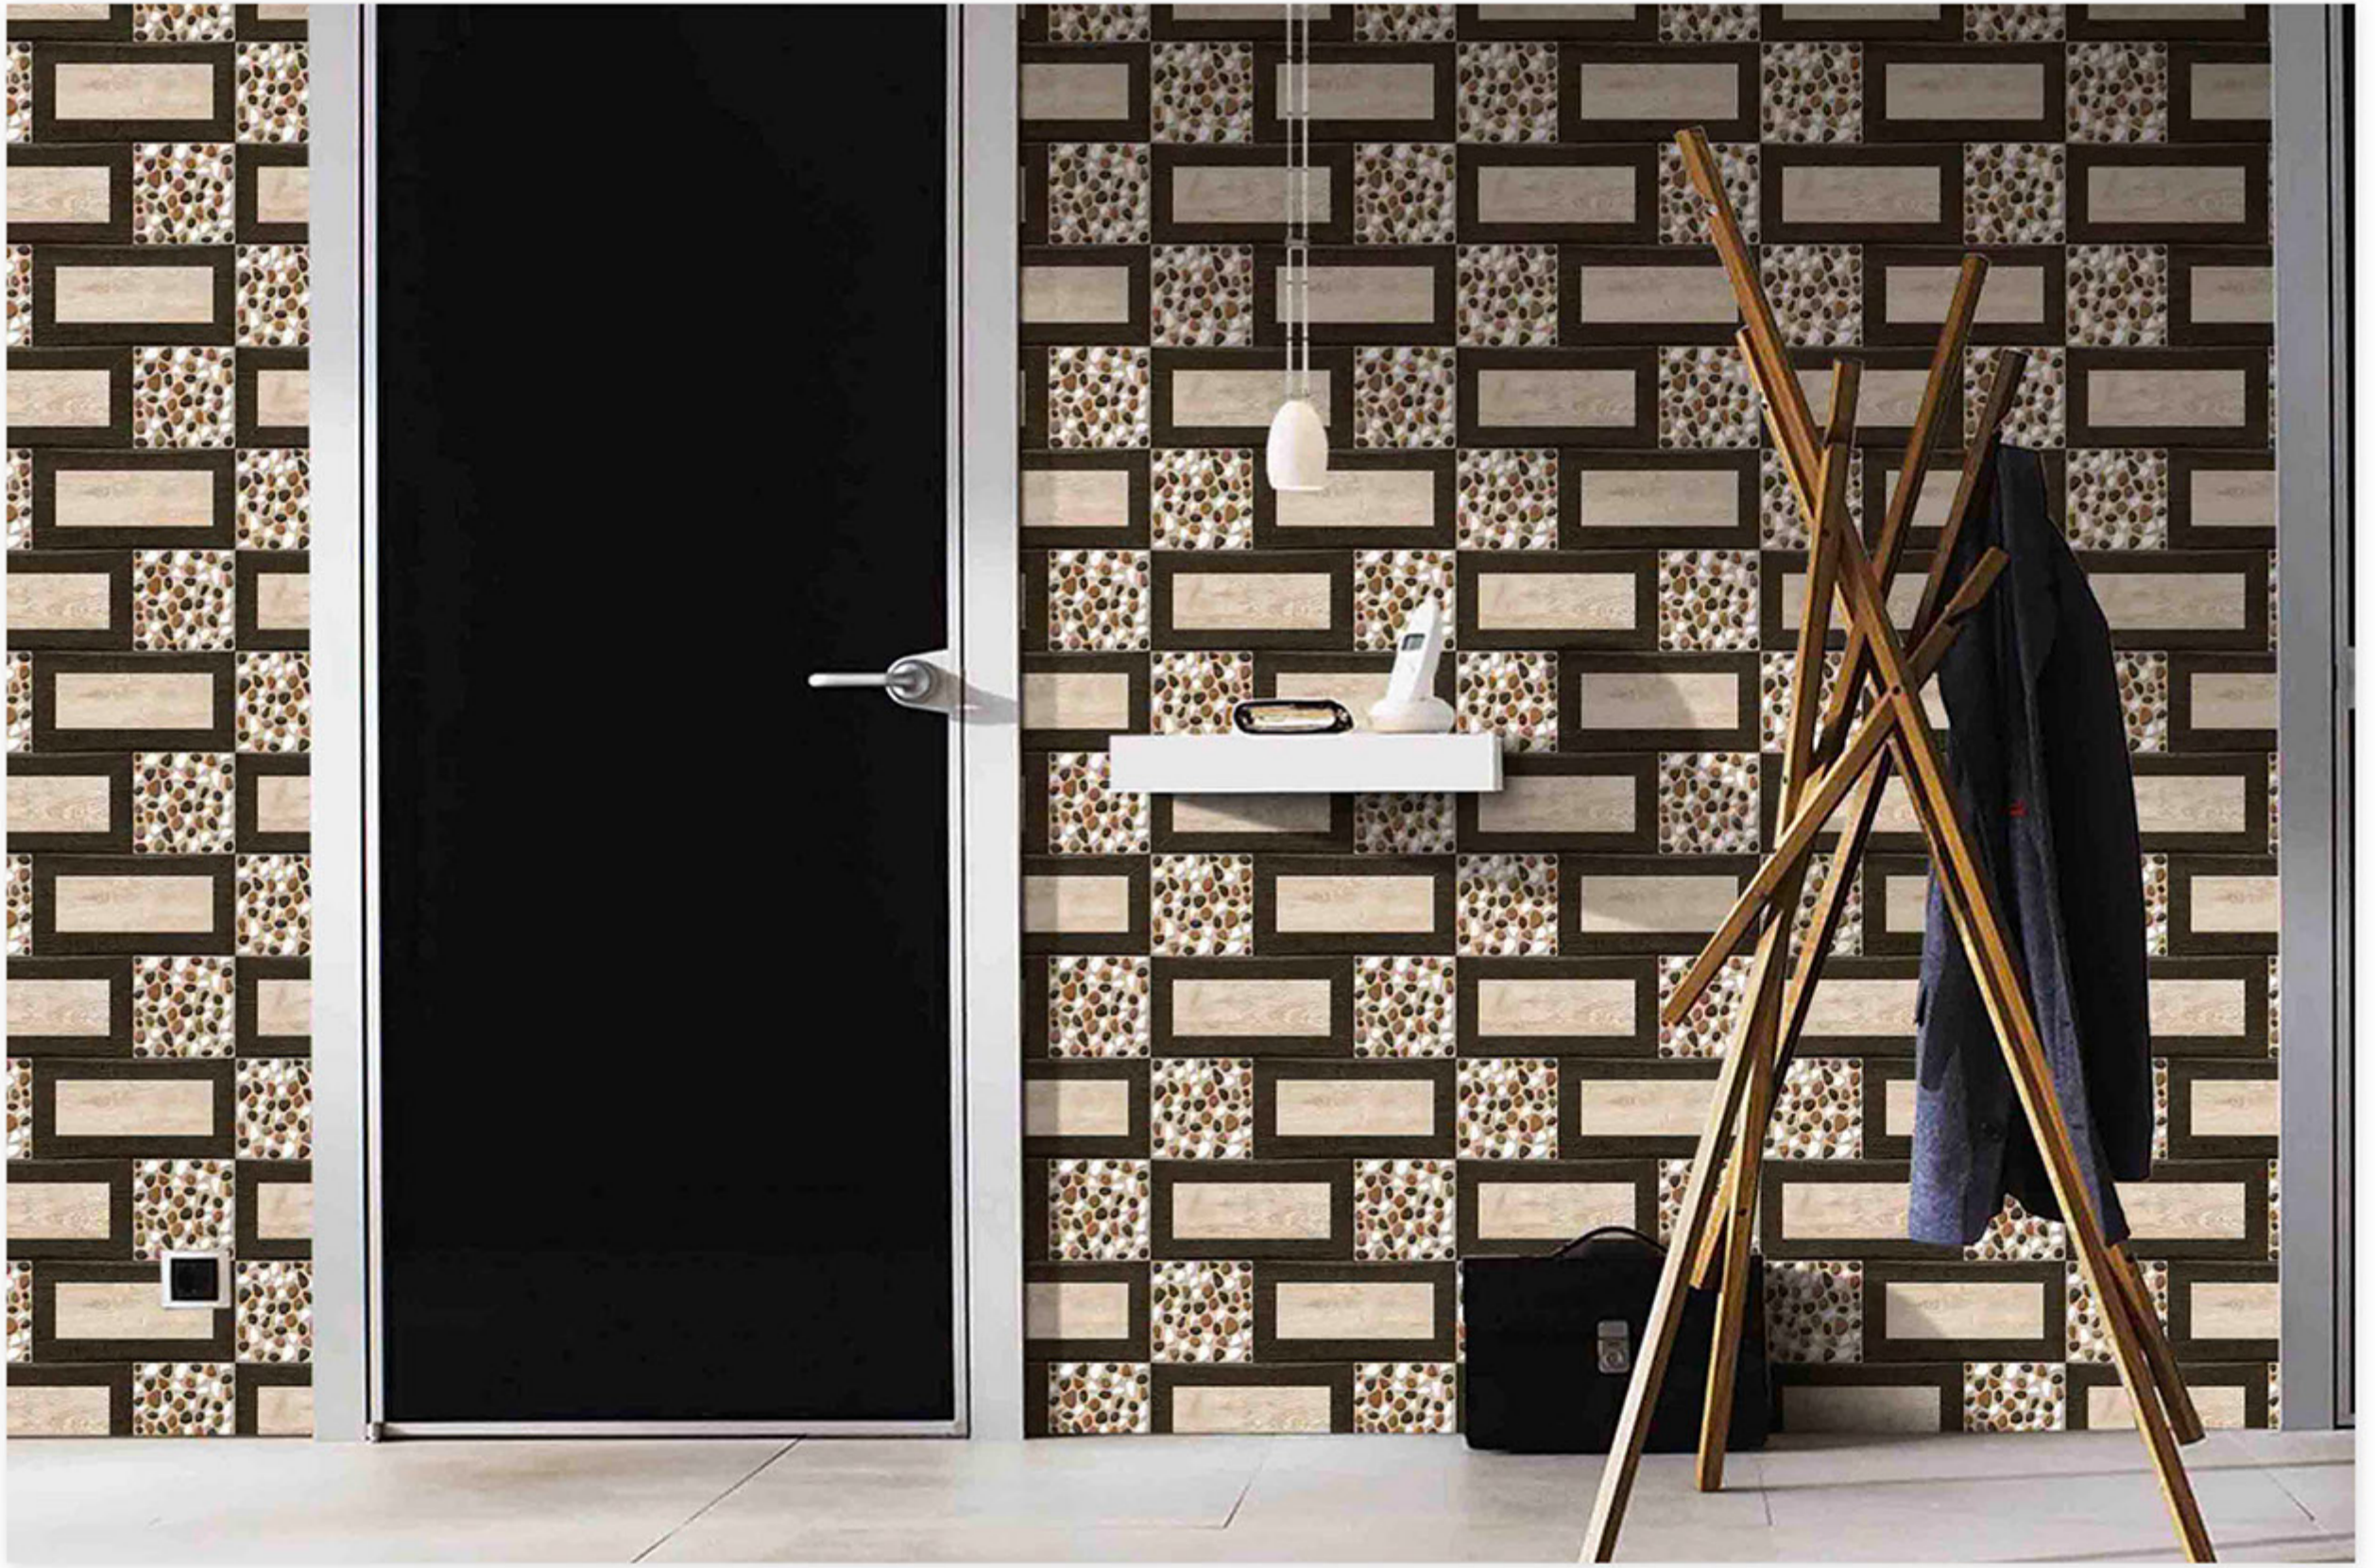

**ELE-577**






**ELE-578**





**ELE-579**



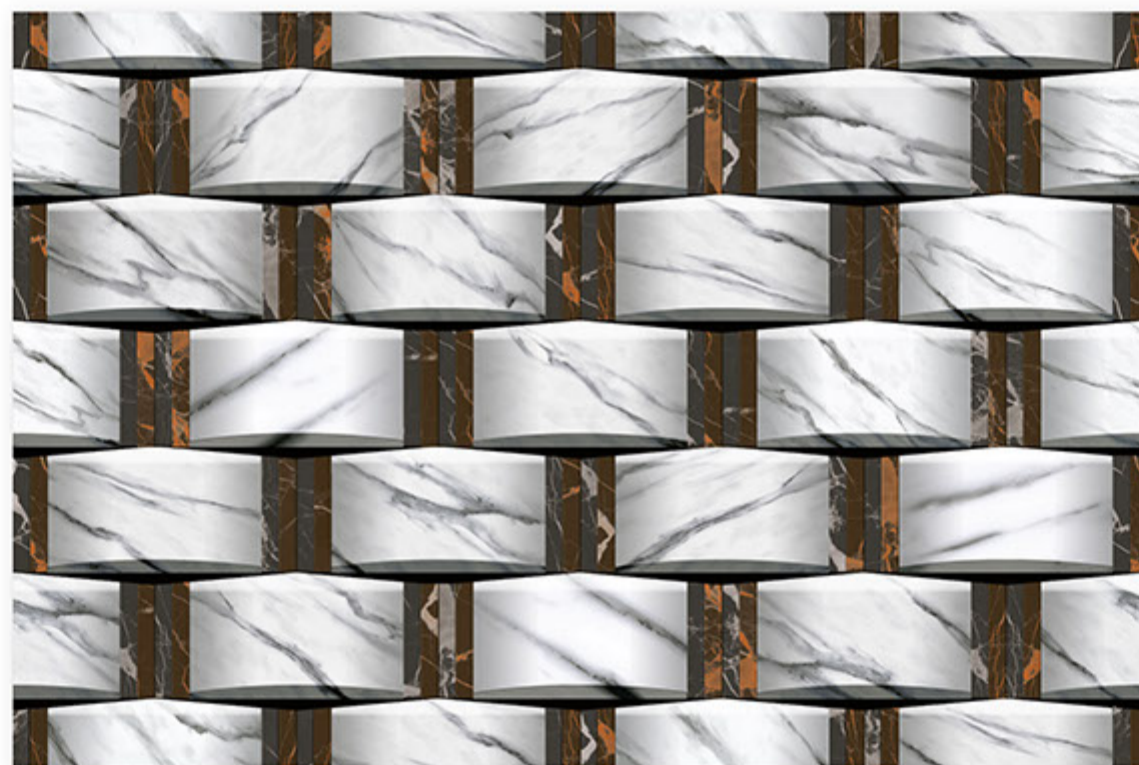


**ELE-580**



WATERPROOF





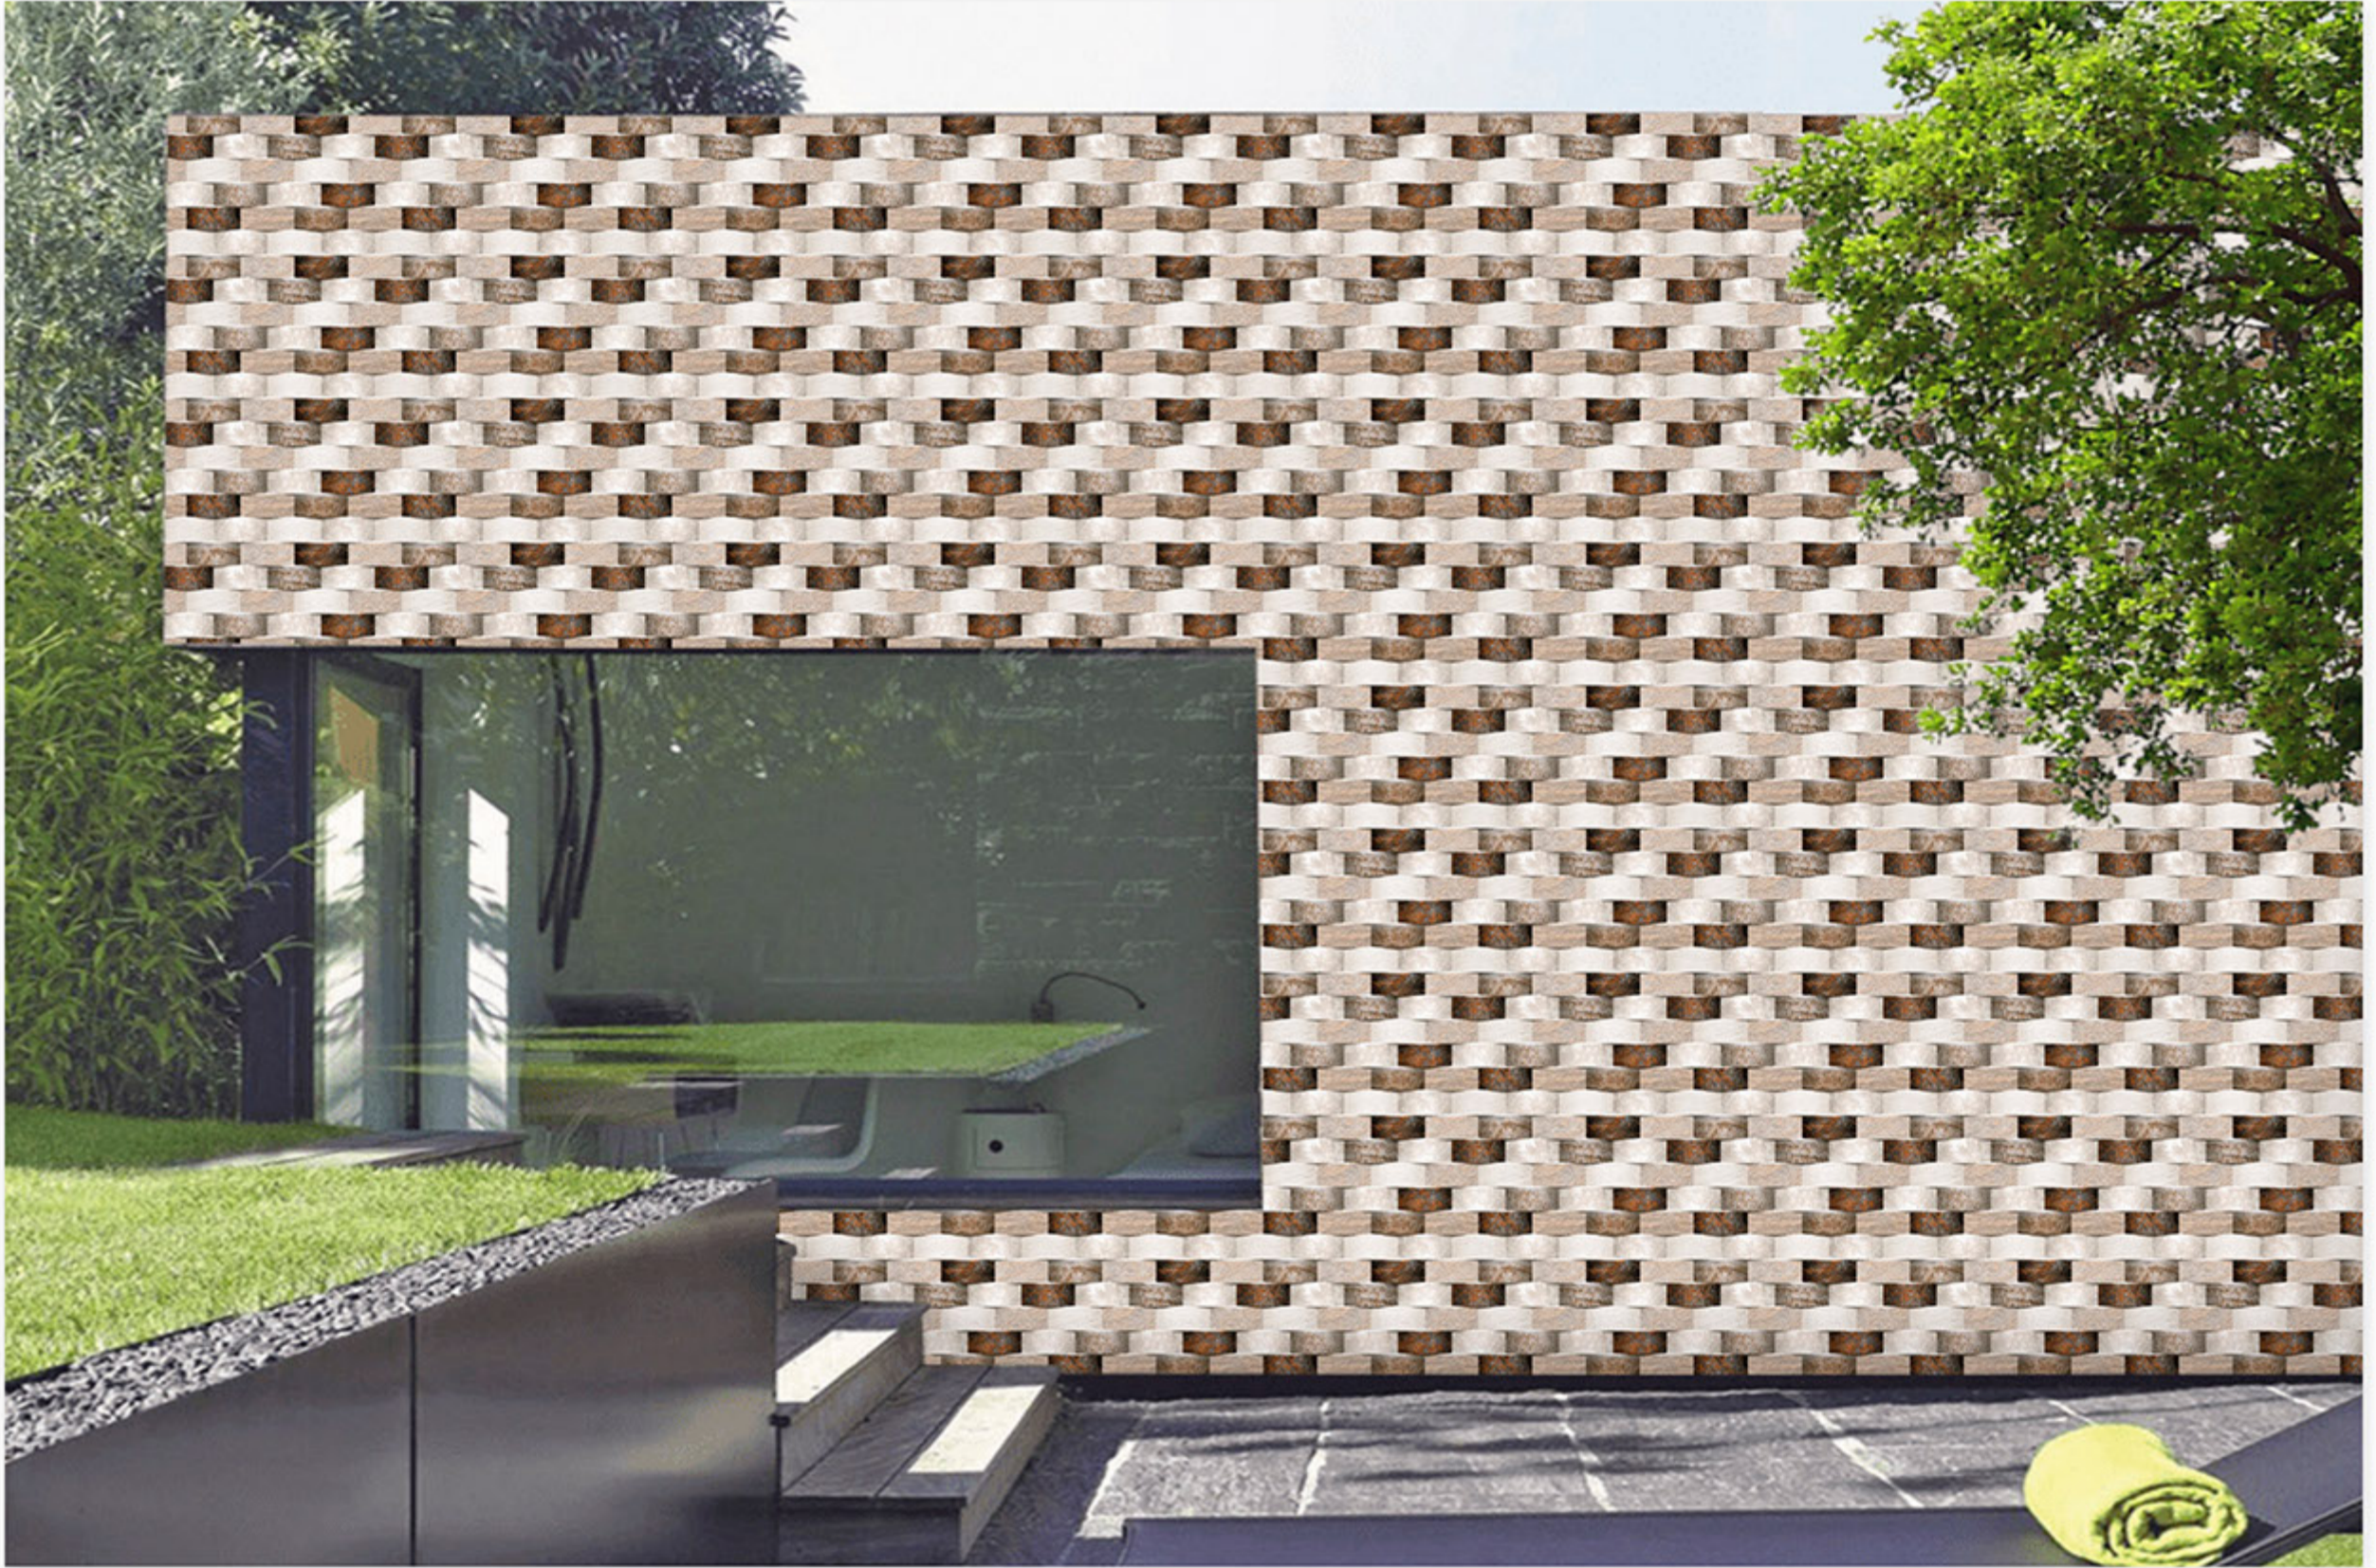

**ELE-581**



WATERPROOF





**ELE-582**





**ELE-583**





**ELE-584**





# TECHNICAL SPECIFICATION

CHARACTERISTICS	EURO STANDARDS EN - 159/IS 13753	FLORICE VALUES
<b>DIMENSION &amp; SURFACE QUALITY</b>		
1 Dimension & Surface Quality	±0.5%	±0.2%
2 Deviation in Thickness	±0.6mm	±0.2mm
3 Straightness of sides	±0.3%	±0.2%
4 Rectangularity	±0.5%	±0.3%
5 Surface Flatness	±0.5%	±0.3%
6 Surface Quality	Min 95%	Min 96%
<b>PHYSICAL PROPERTIES</b>		
1 Water Absorption	>10%	14.17%
2 Bending Strength	>150 Kg/Cm <sup>2</sup>	200-250 Kg/Cm <sup>2</sup>
3 Scratch hardness (Mohs)	Min 3	Min 3
4 Crazeing	1 Cycle	3 Cycles
<b>CHEMICAL PROPERTIES</b>		
1 Staining Resistance	Min Class 2	Resistance to all Acids and Alkalies & Household Chemicals, except Hydro Flouric Acid
2 Household Chemical	Min Class B	
<b>THERMAL PROPERTIES</b>		
1 Thermal Shock	Resistant to 10 Cycles	CONFORMS
2 Thermal Expansion	Max-9E-06	CONFORMS

## PACKING DETAILS

Size	Thickness (Approx)	No. of Tiles	Area Sq. Mtr.	Weight (Approx)
Wall Tiles - 300x450	8.0(Approx)	6	0.81	11.20 Kgs.
Floor Tiles - 300x300	8.0(Approx)	9	0.81	11.20 Kgs.

## FLORICE CERAMIC LLP

Survey No. 507/2, B/h. admin Vitrified,  
At. Bela (Ranpar) Jetpar Road, Morbi - 363642 (Guj.) INDIA

e-mail : [floriceceramic@gmail.com](mailto:floriceceramic@gmail.com)

Web. [www.floriceceramic.com](http://www.floriceceramic.com)

Call : +91 95120 23201 / 202 / 203