


WATERPROOF




DIGITAL WALL TILES

Exclusive series


PRODUCT CATALOUGE

Glossy
Series


300 x 450mm

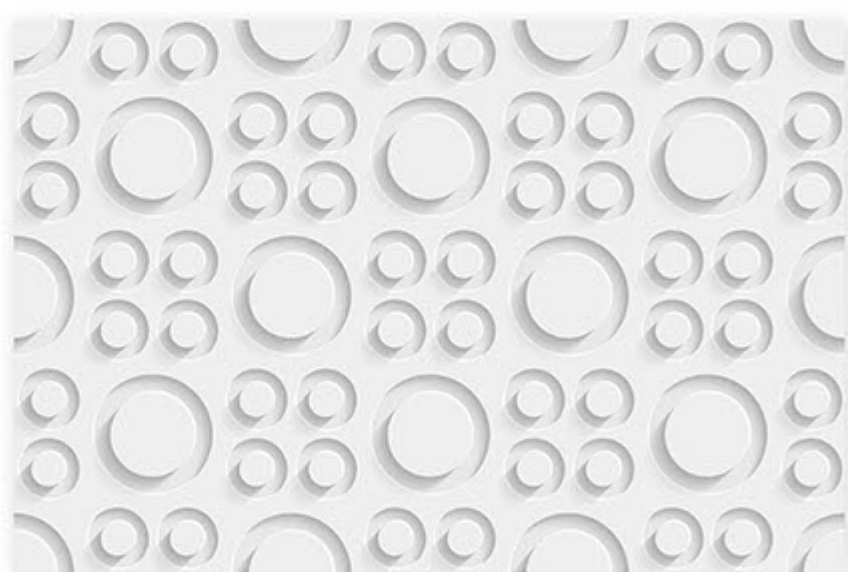

5001 LT

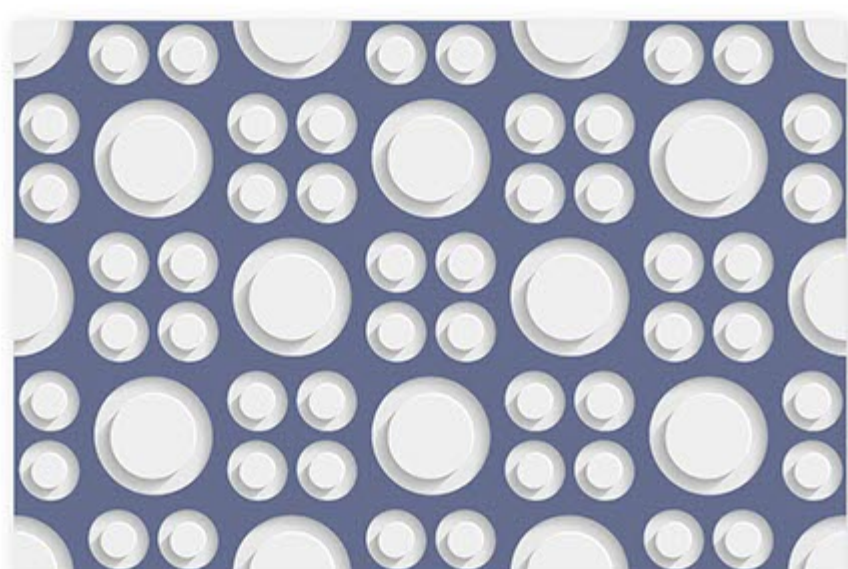


5001 DK

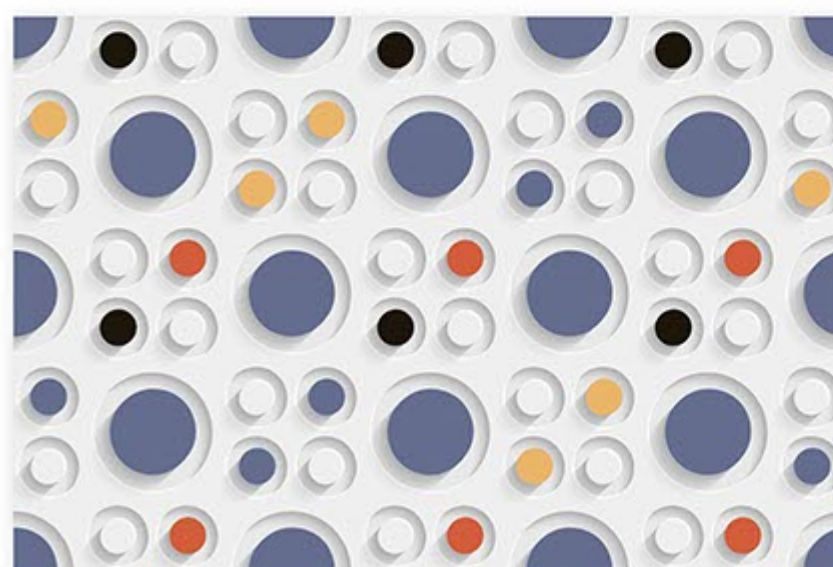


5001 HL-1




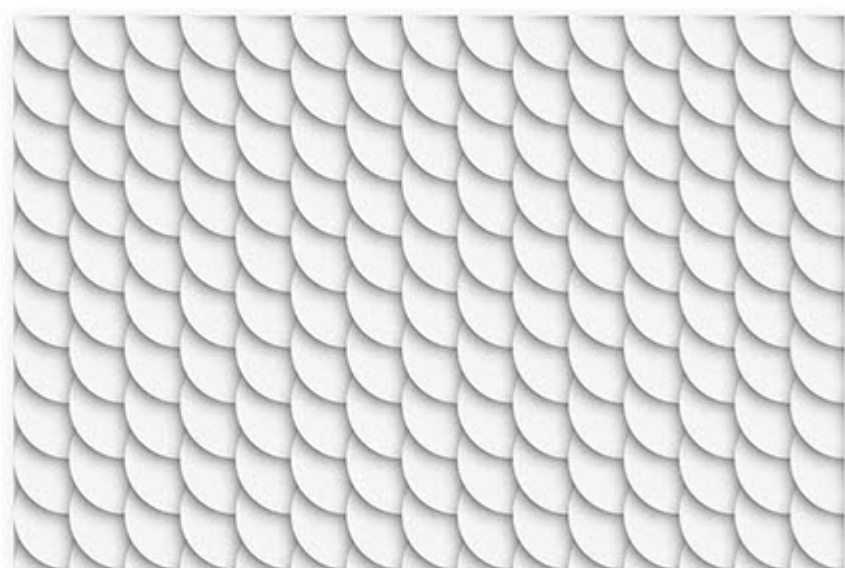

5002 LT

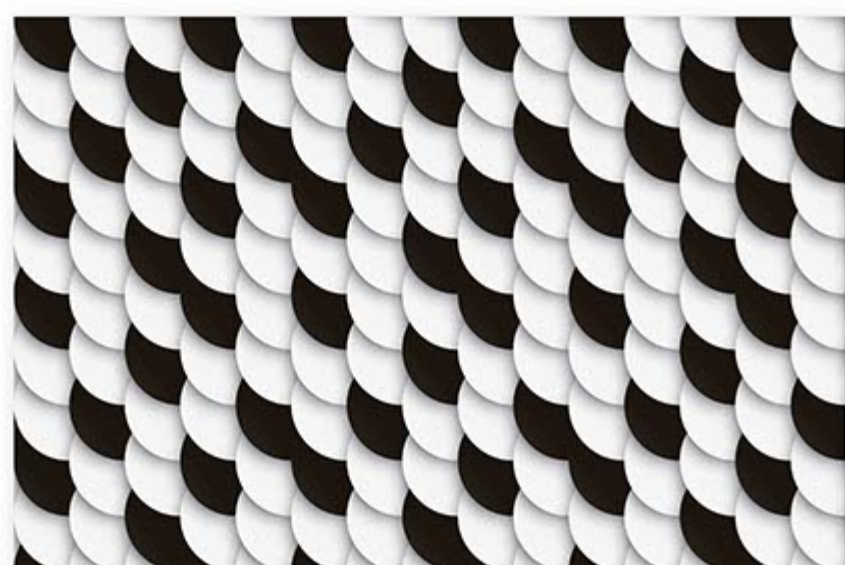


5002 DK

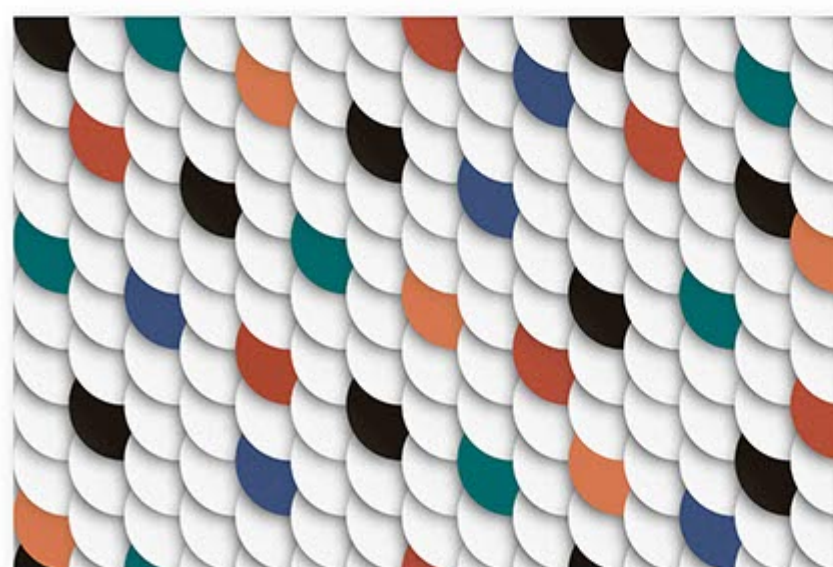


5002 HL-1



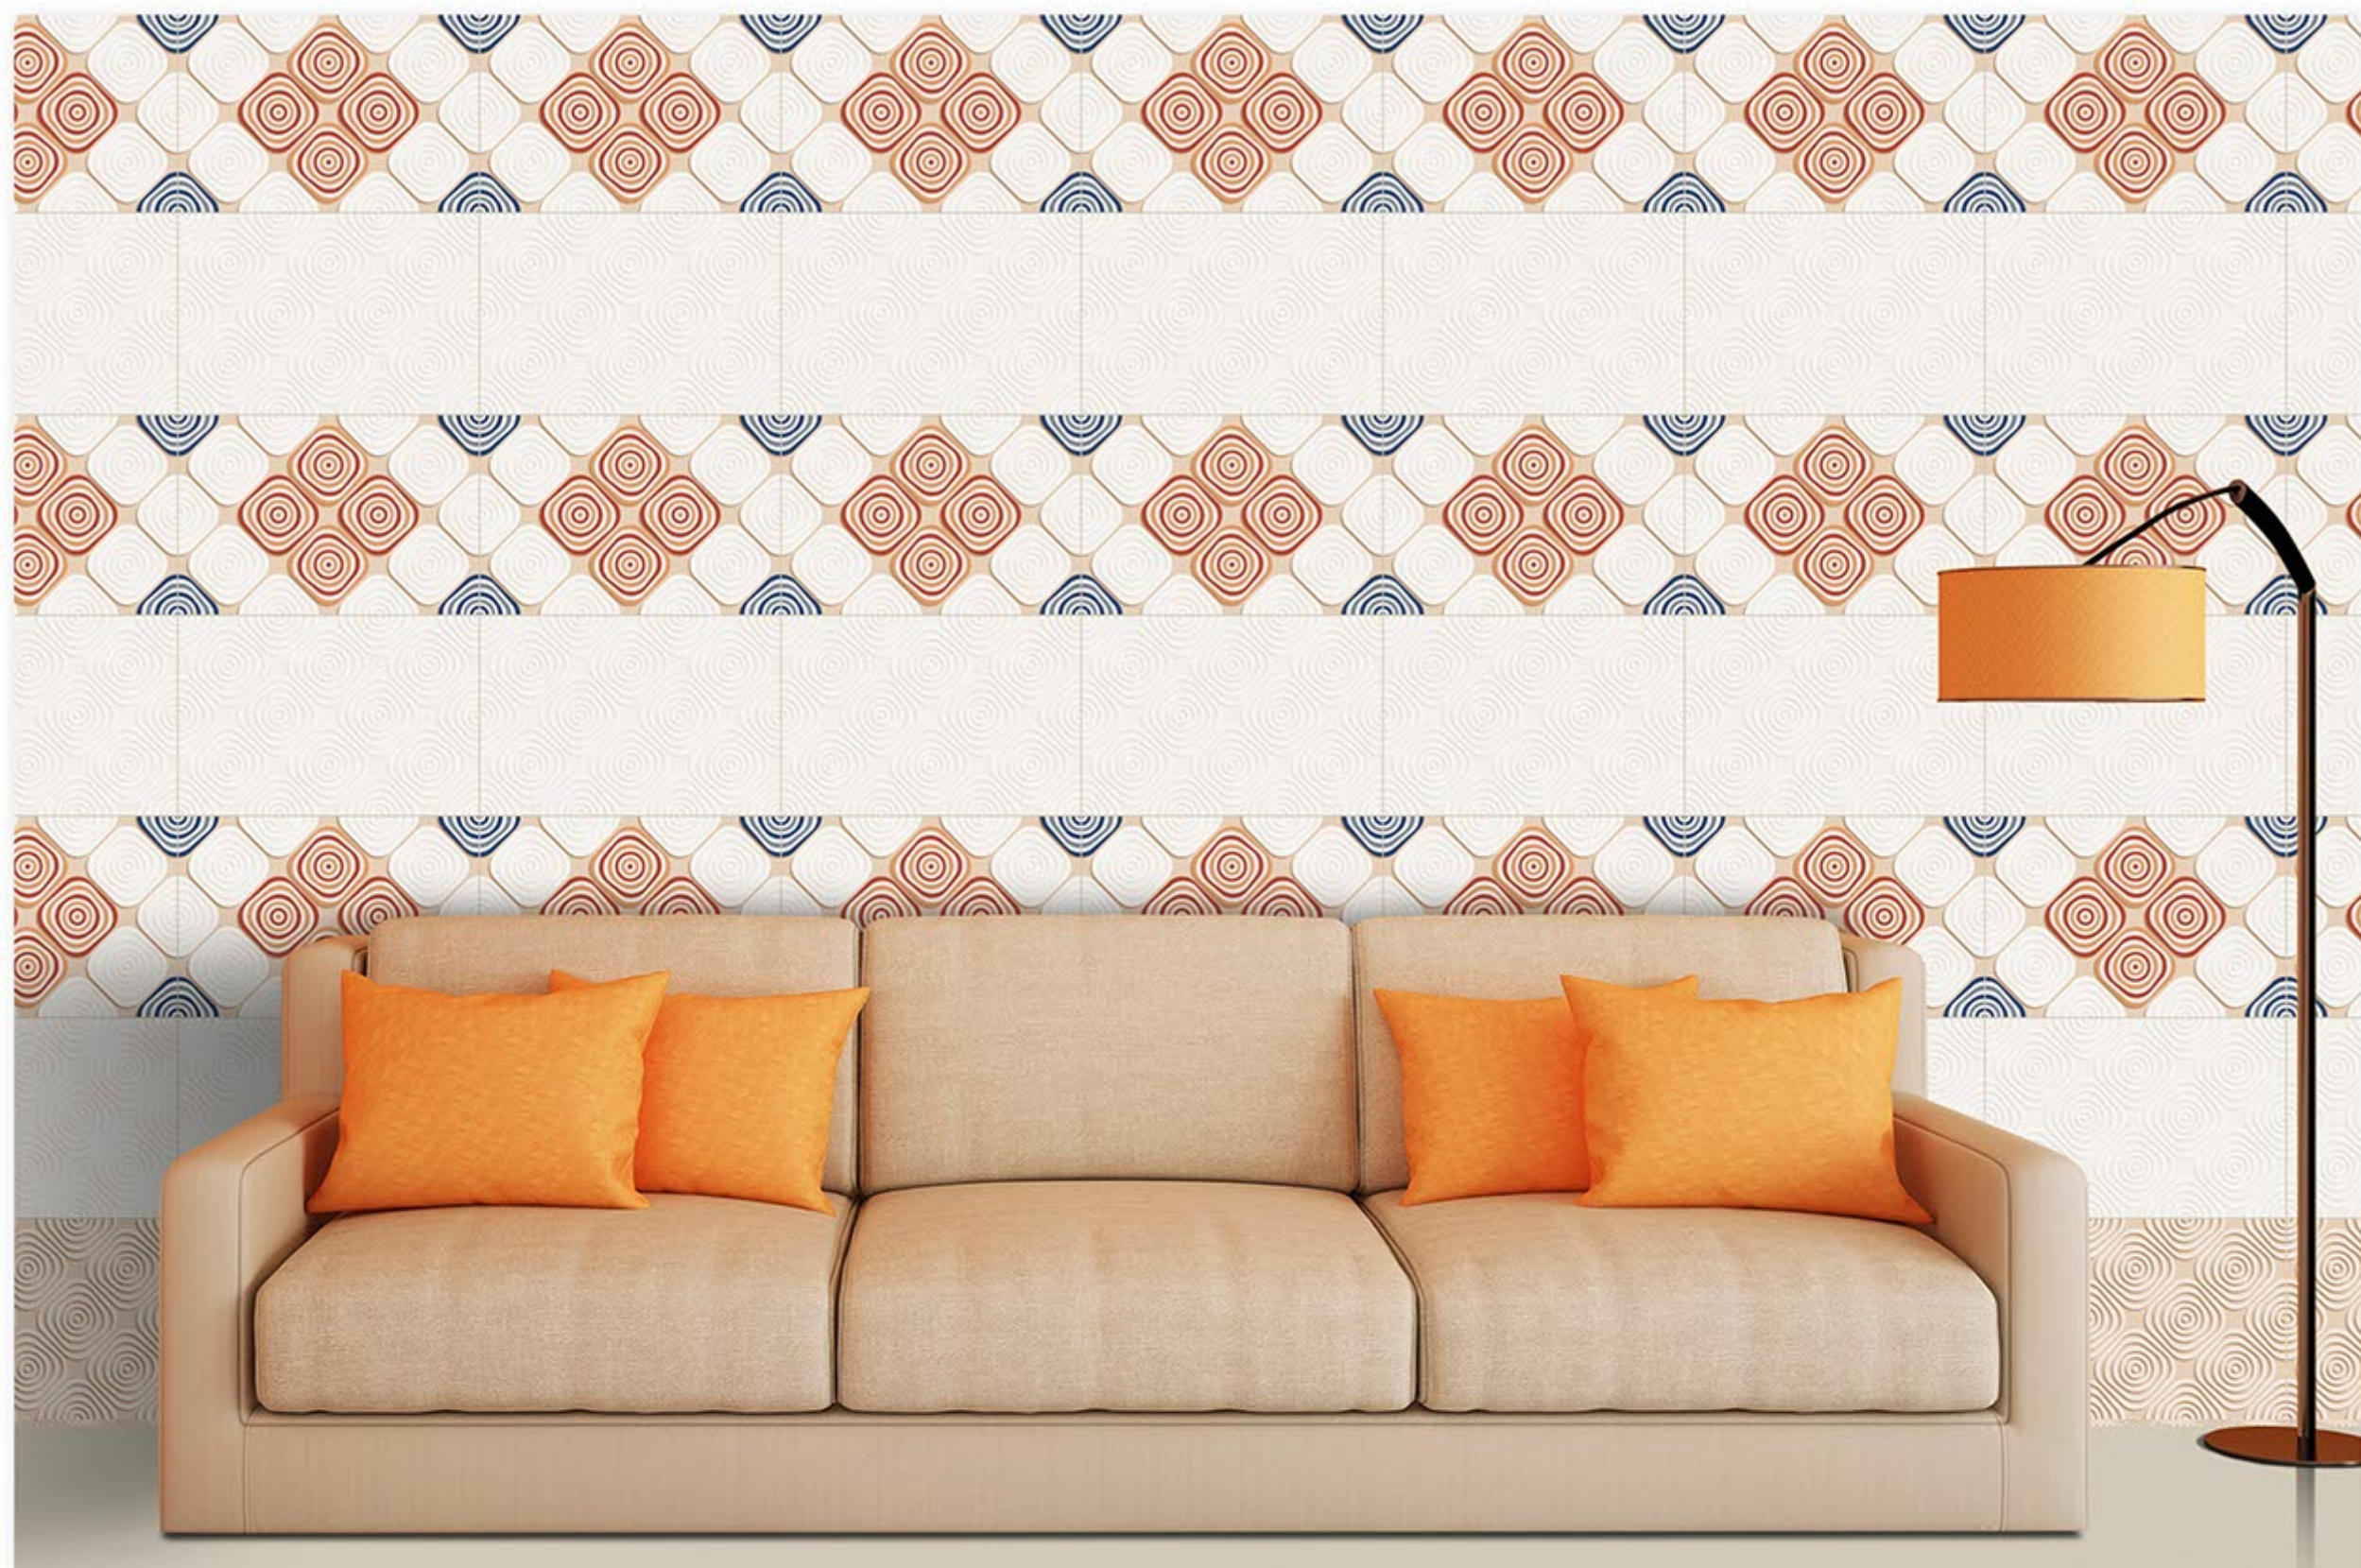

5003 LT

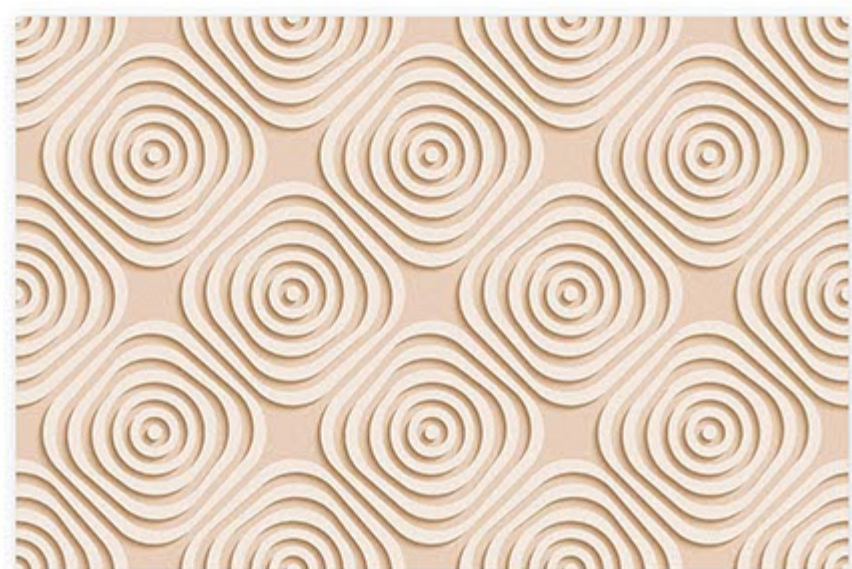

5003 DK



5003 HL-1





5004 LT




5004 DK




5004 HL-1




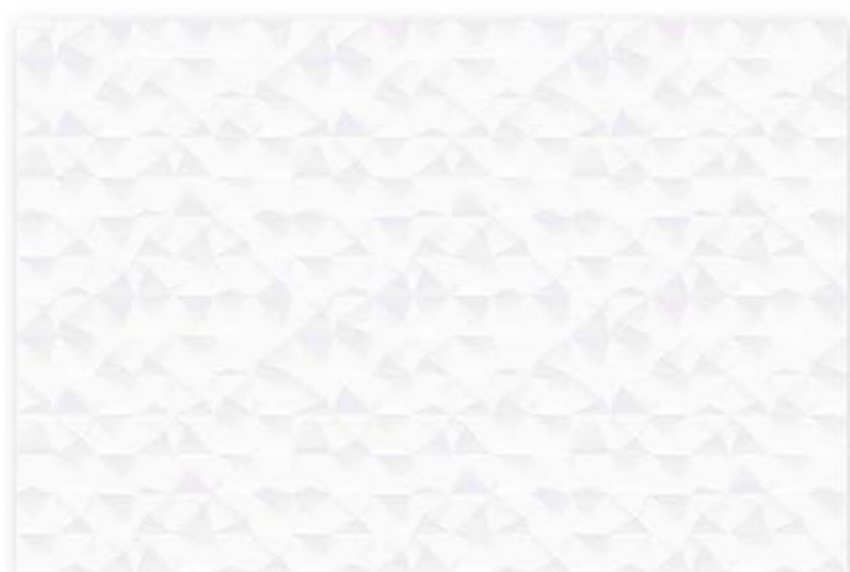

5005 LT

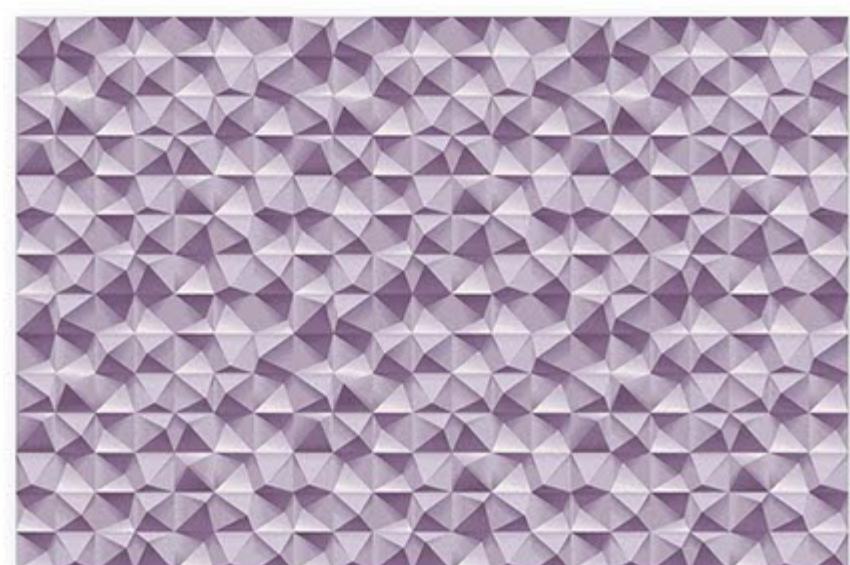

5005 DK

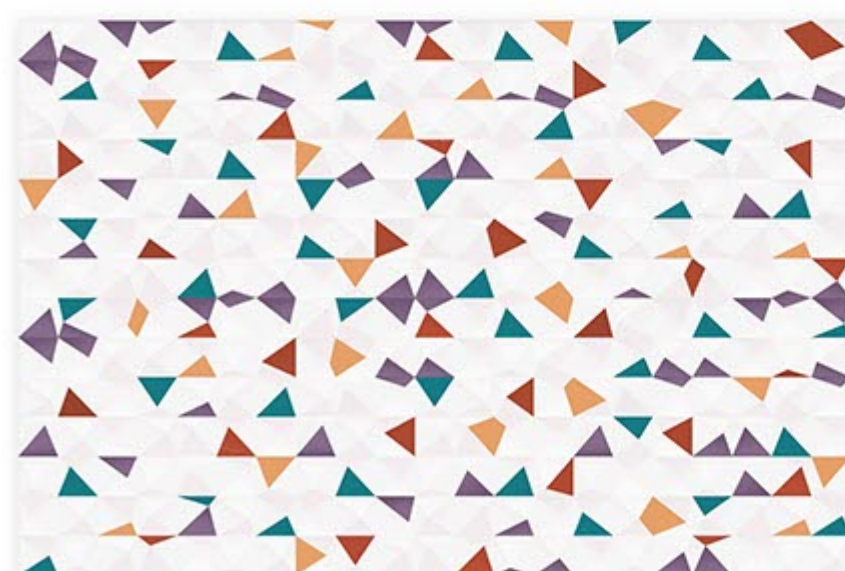


5005 HL-1





5006 LT

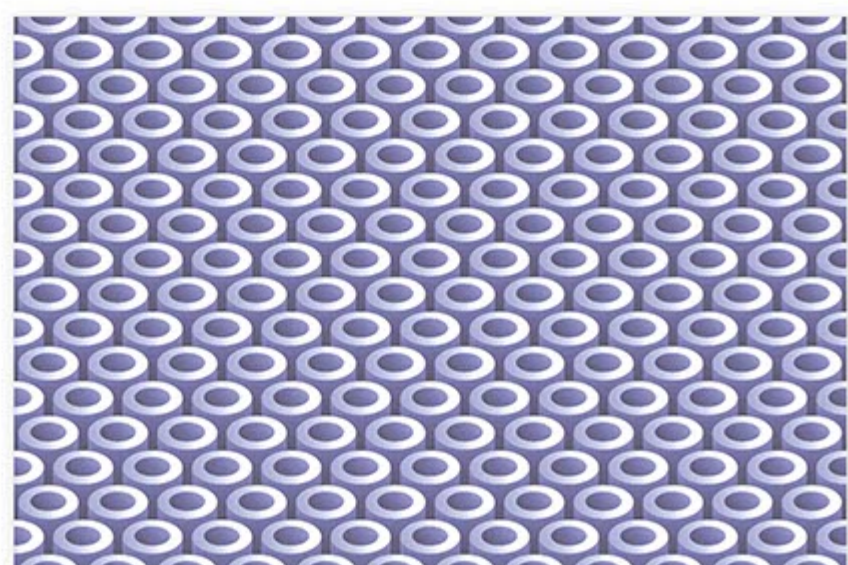


5006 DK




5006 HL-1




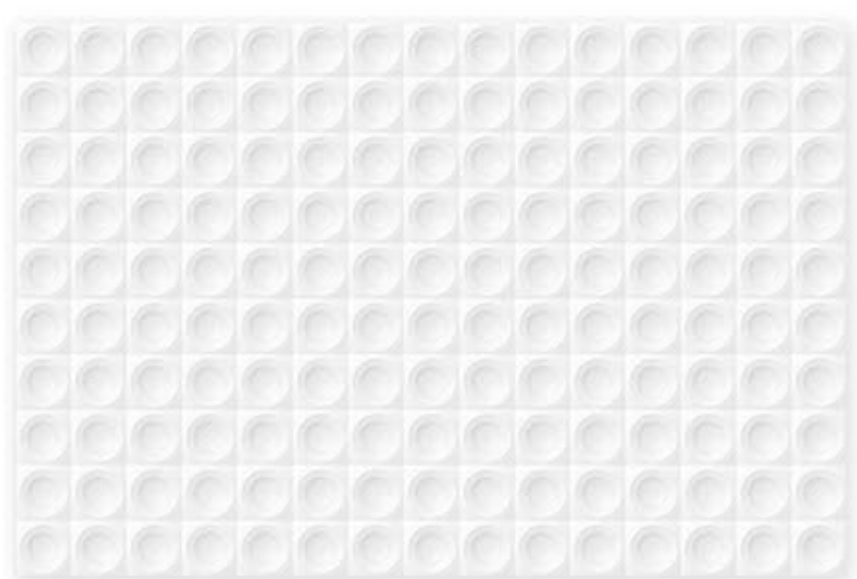

5007 LT

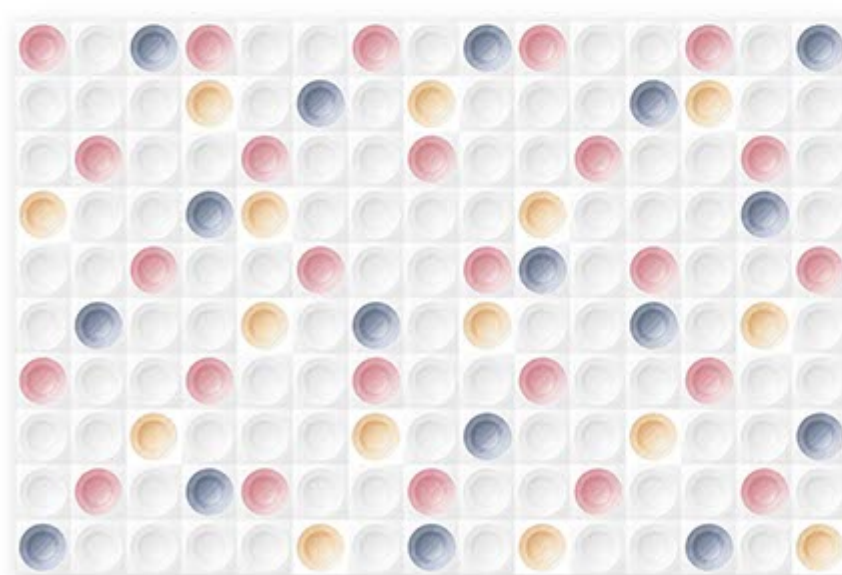

5007 HL-1

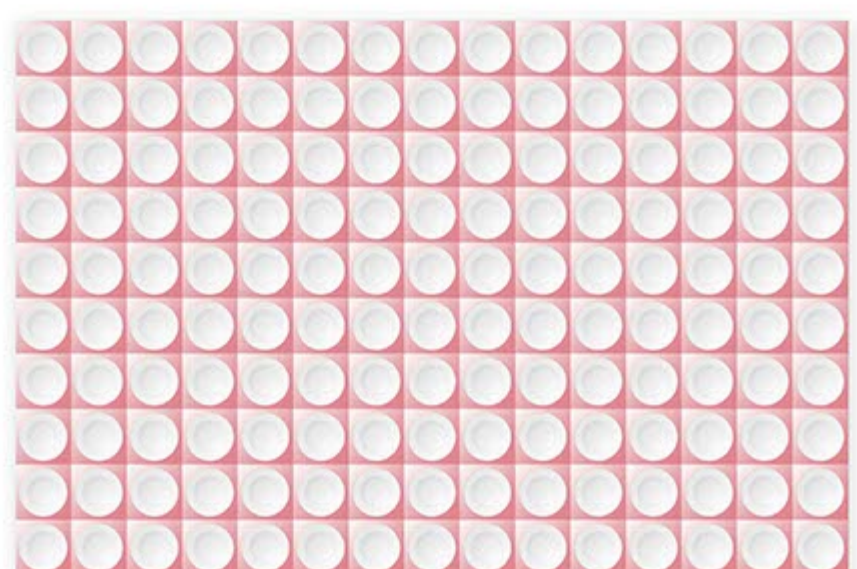

5007 DK





5008 LT





5008 DK




5008 HL-1




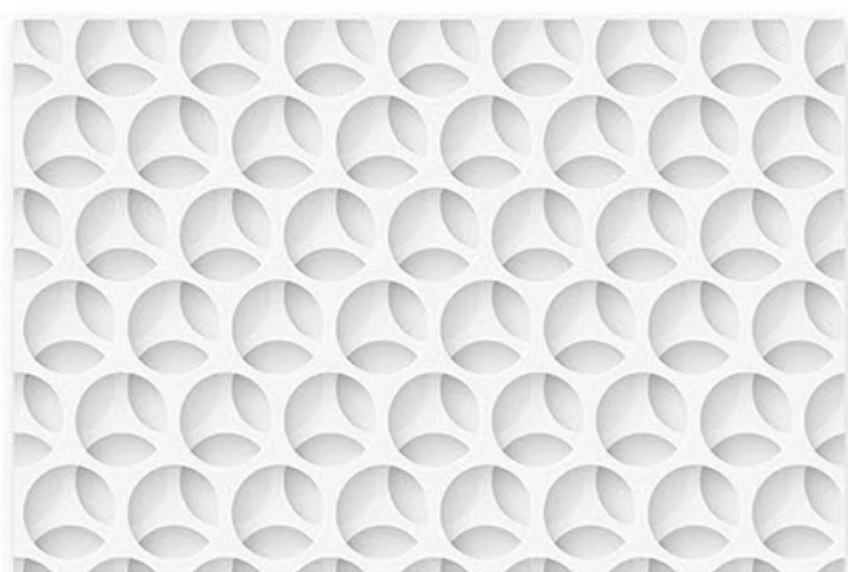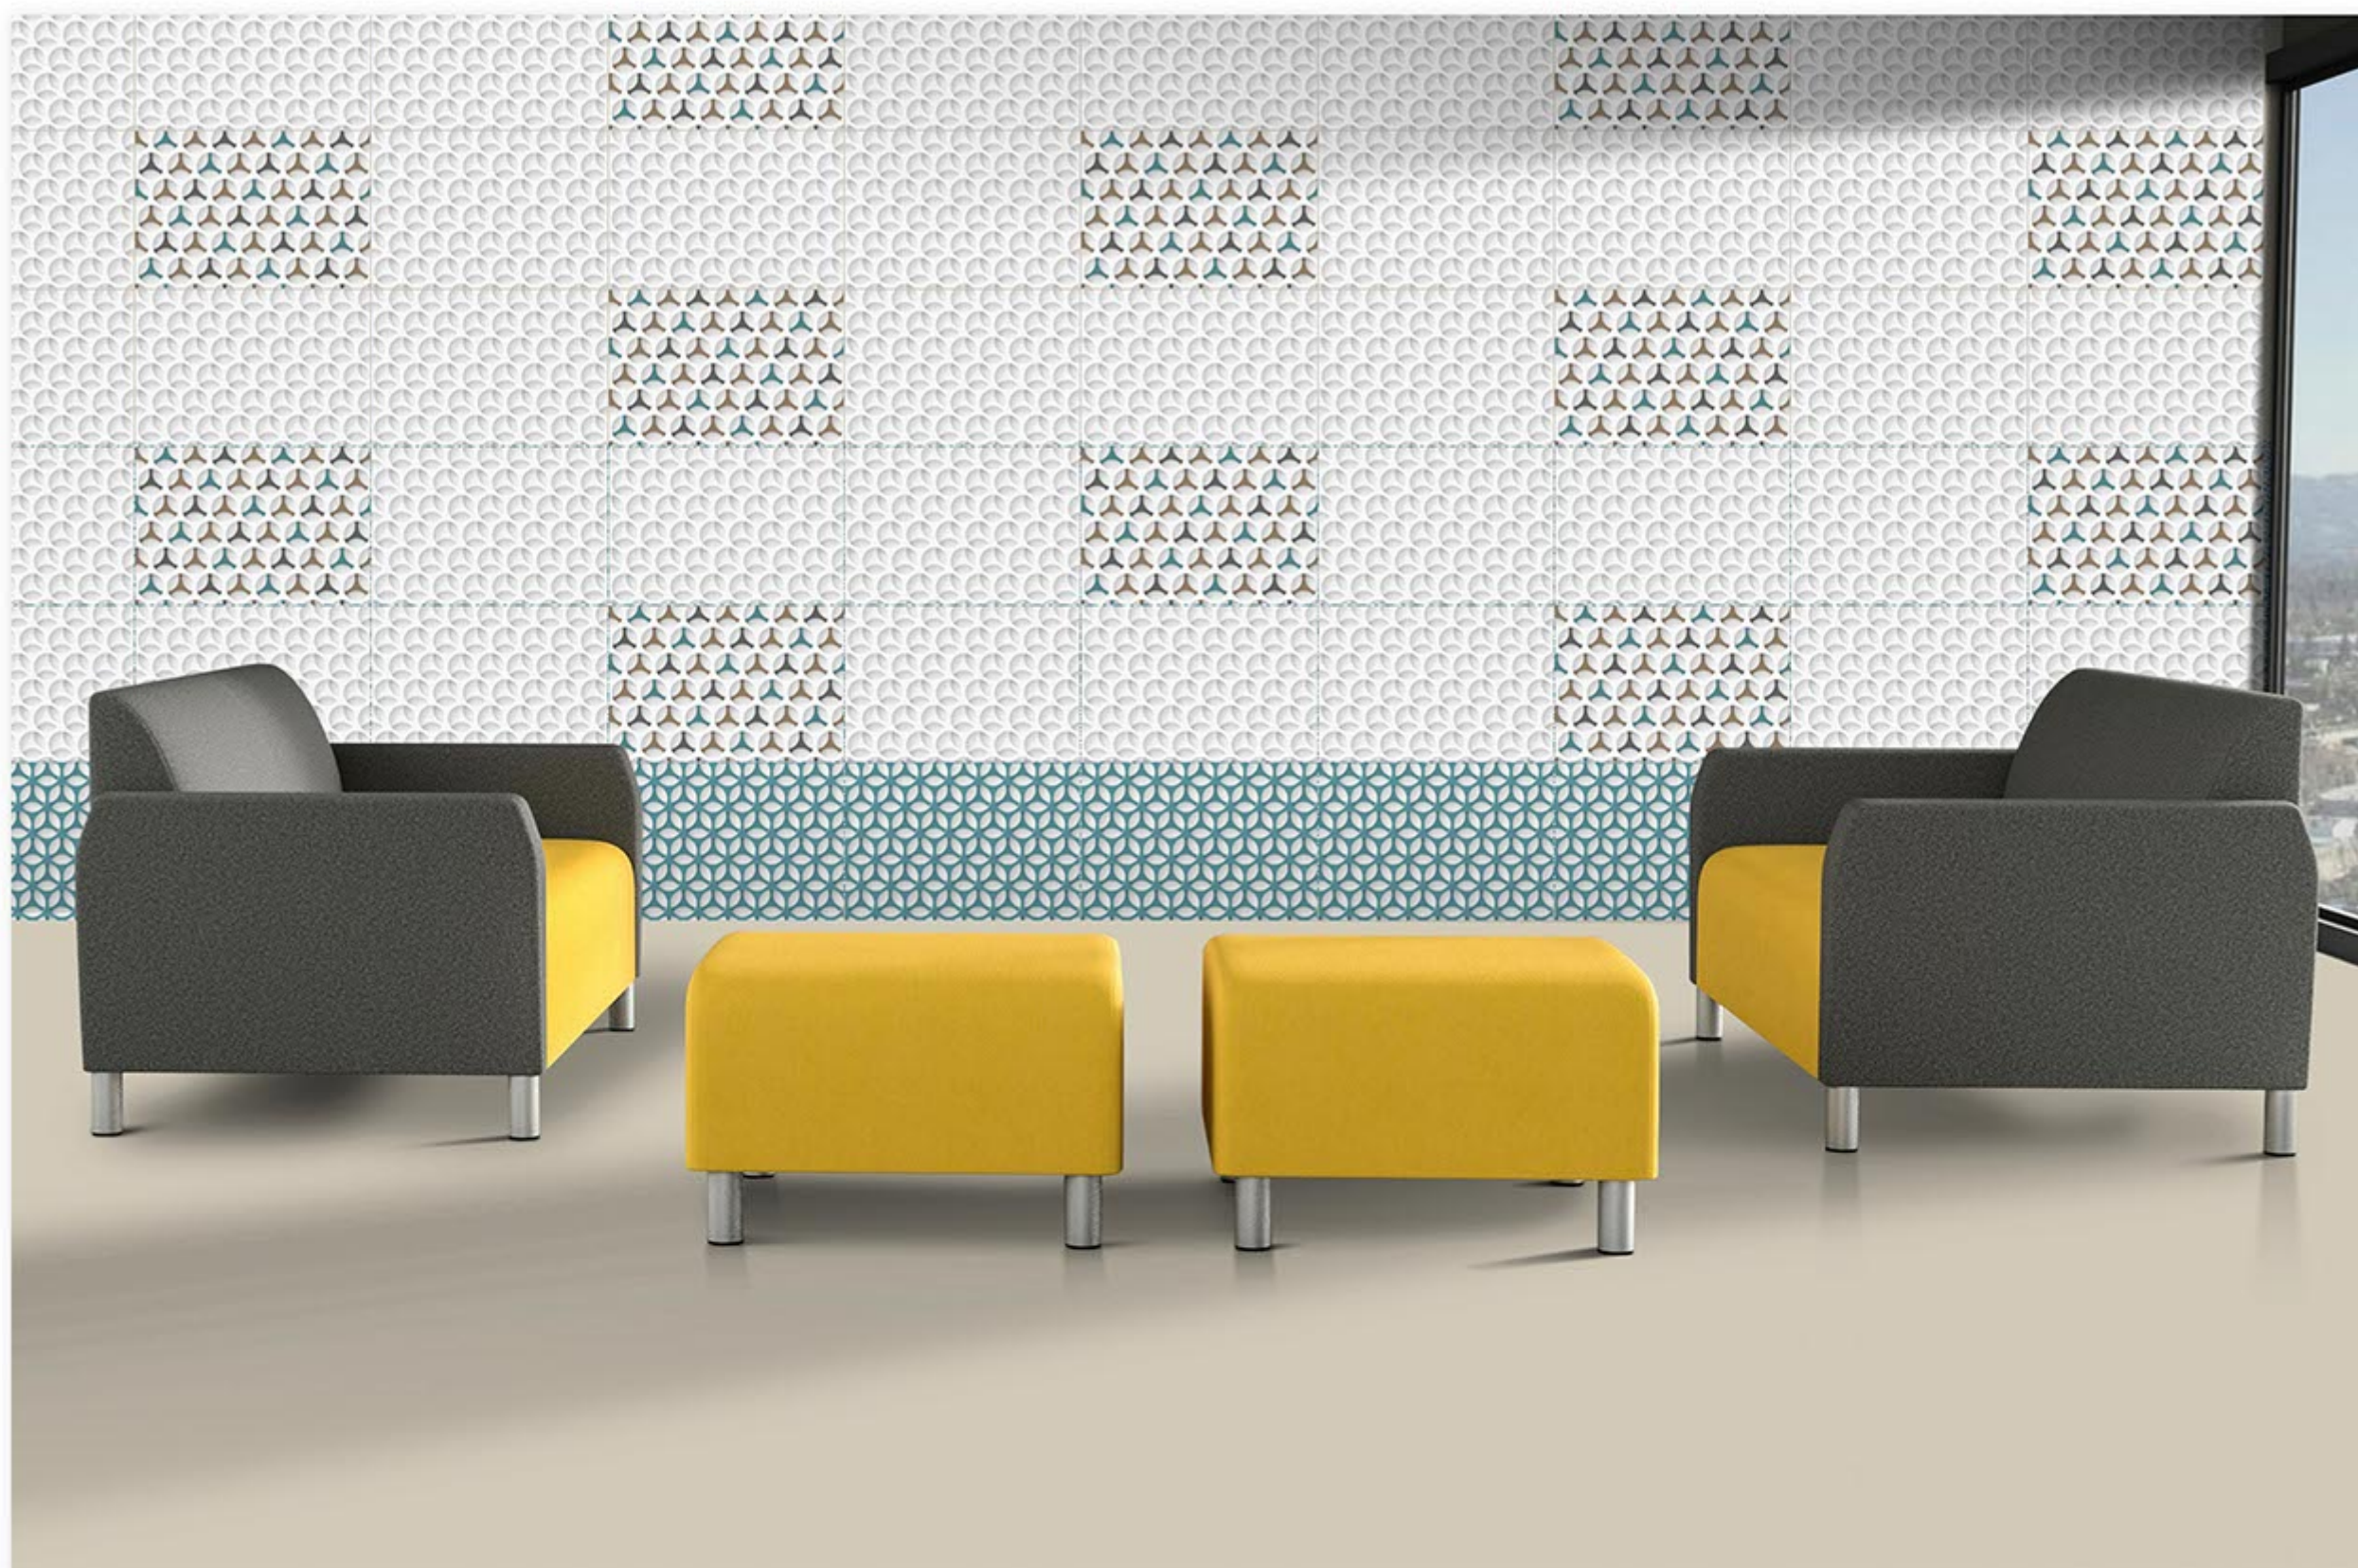

5009 LT

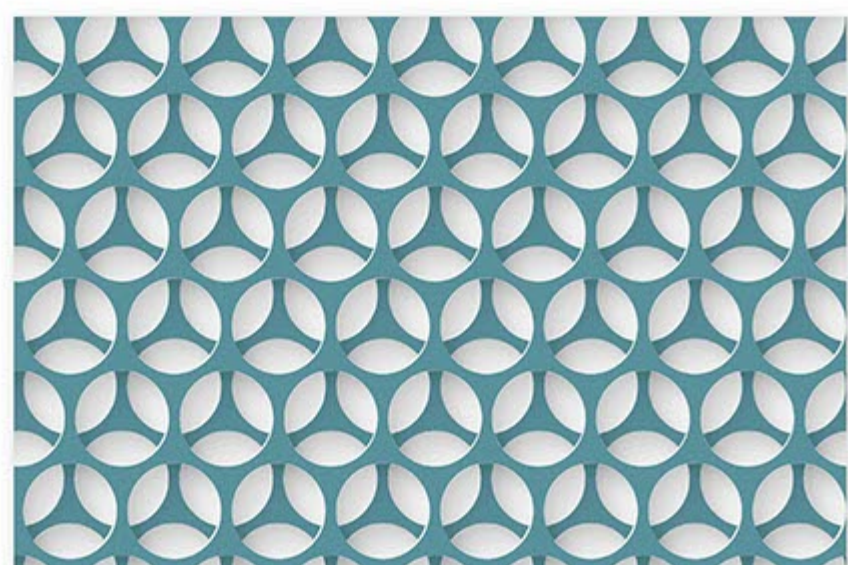


5009 DK

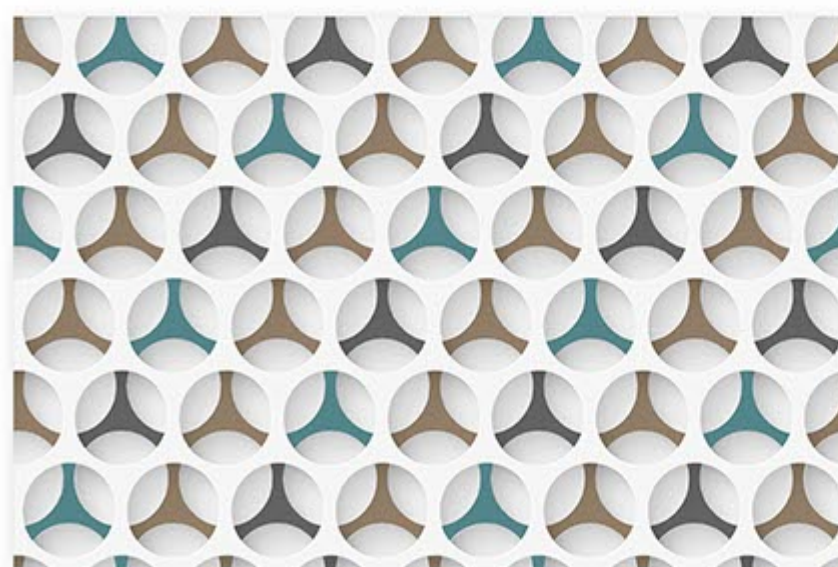


5009 HL-1




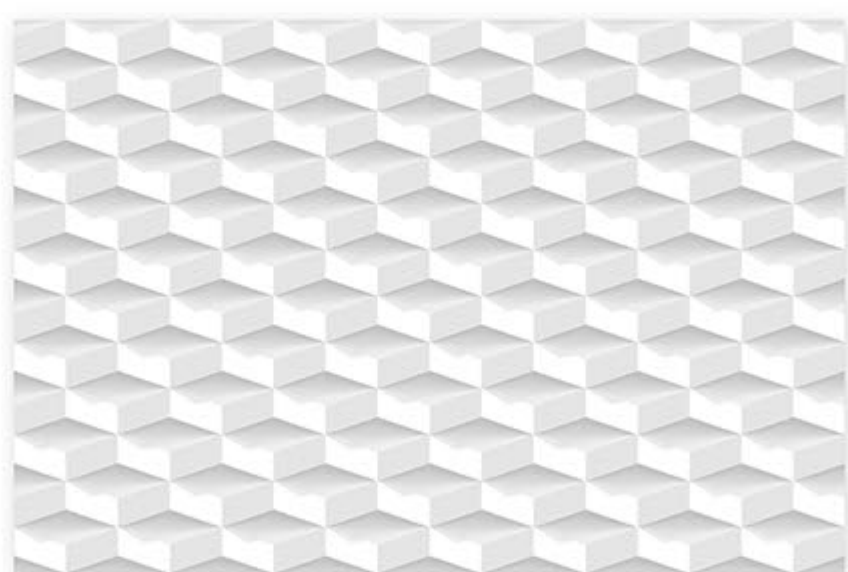

5010 LT

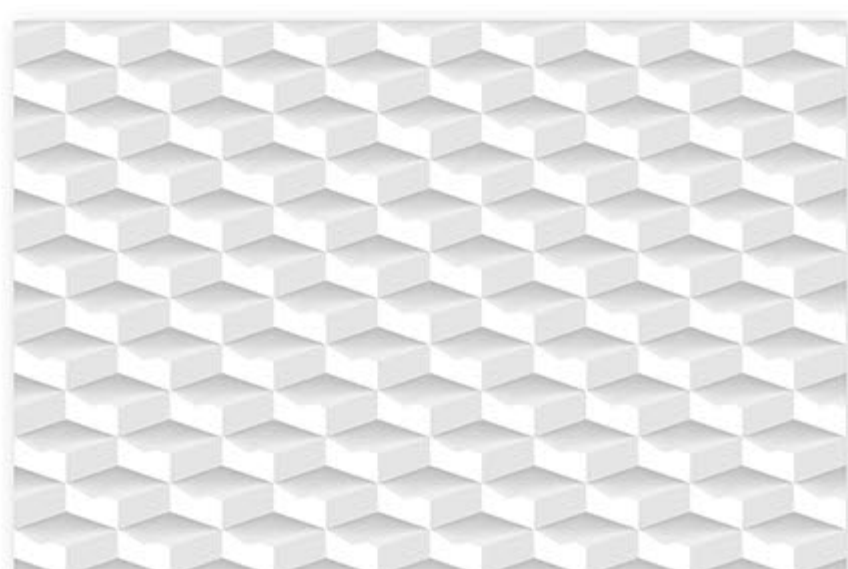

5010 LT

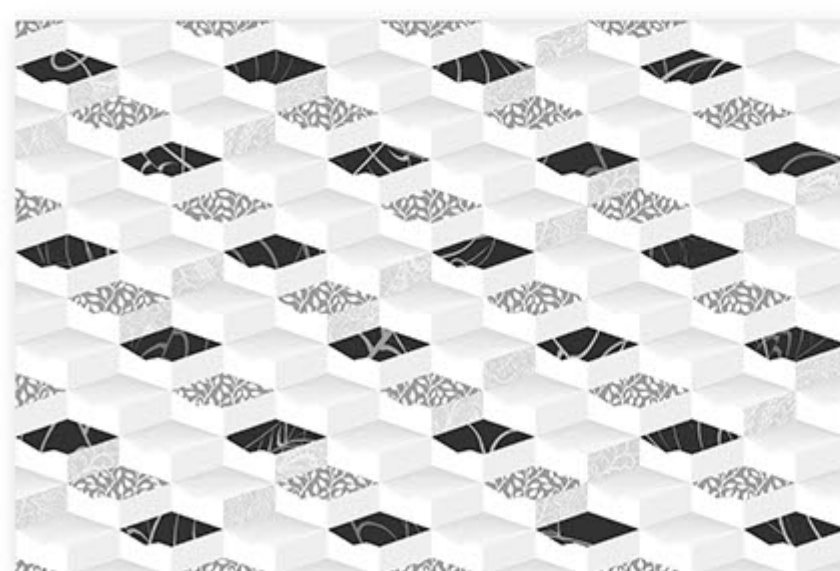


5010 HL-1



WATERPROOF



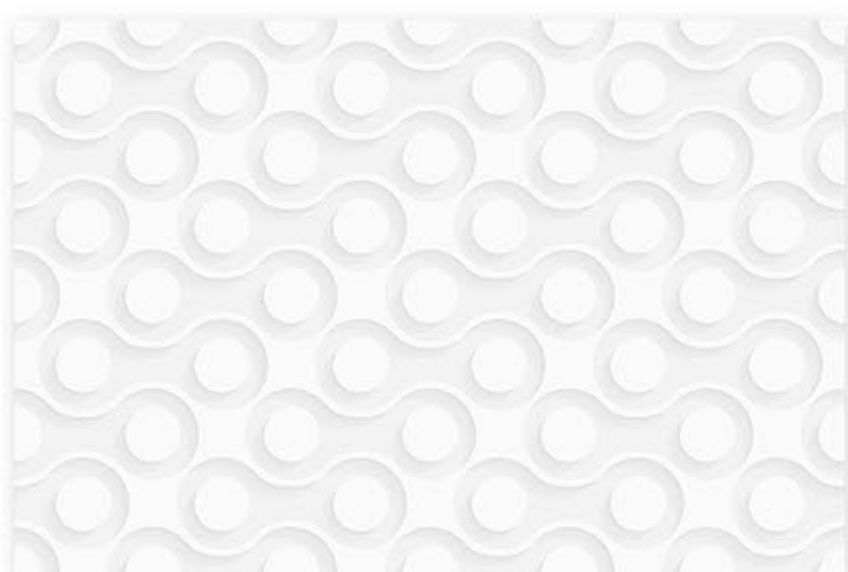

5011 LT




5011 DK




5011 HL-1




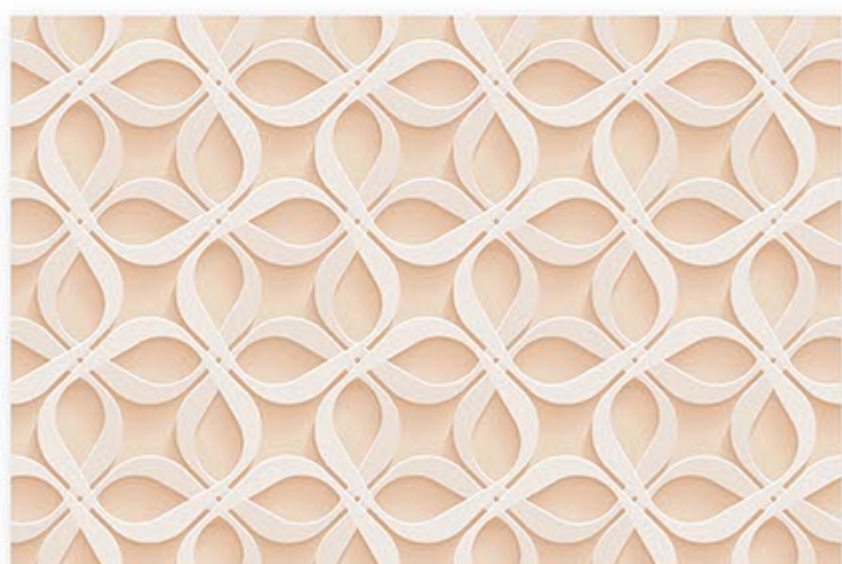

5012 LT

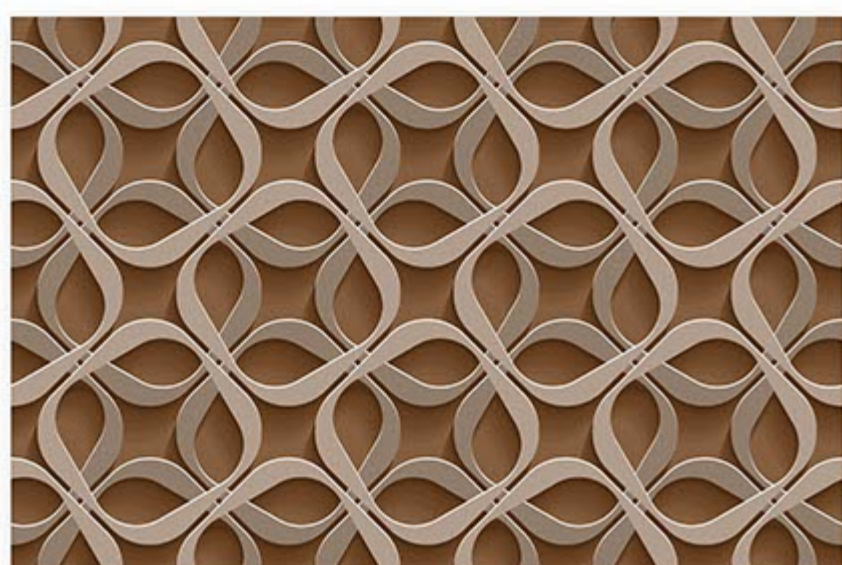

5012 DK

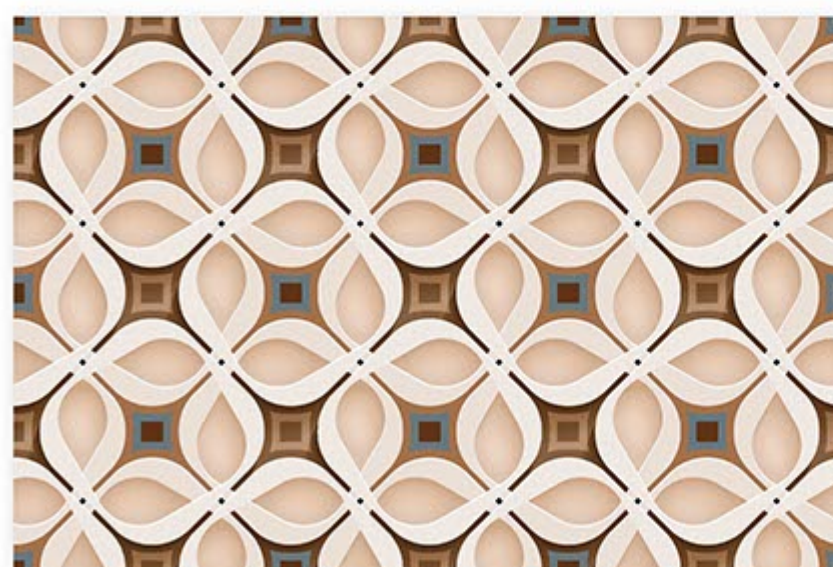


5012 HL-1






5013 LT

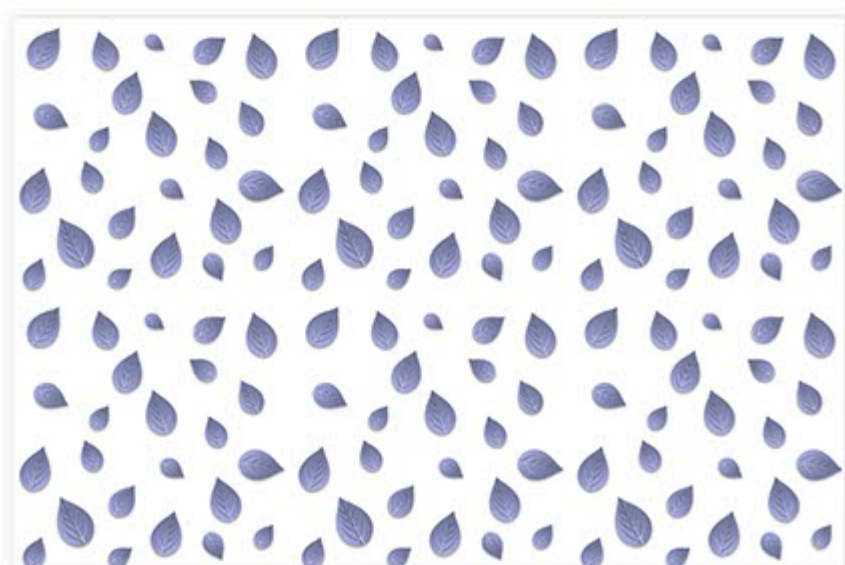

5013 DK

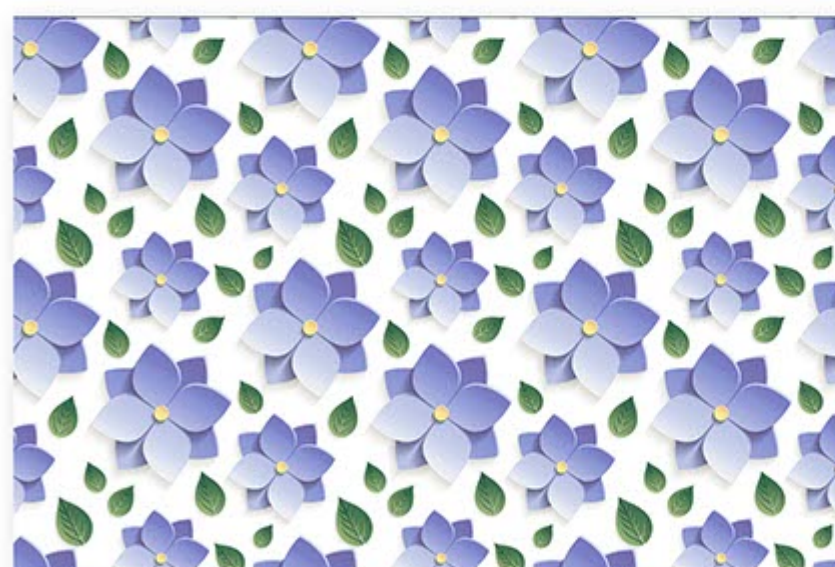


5013 HL-1






5014 LT

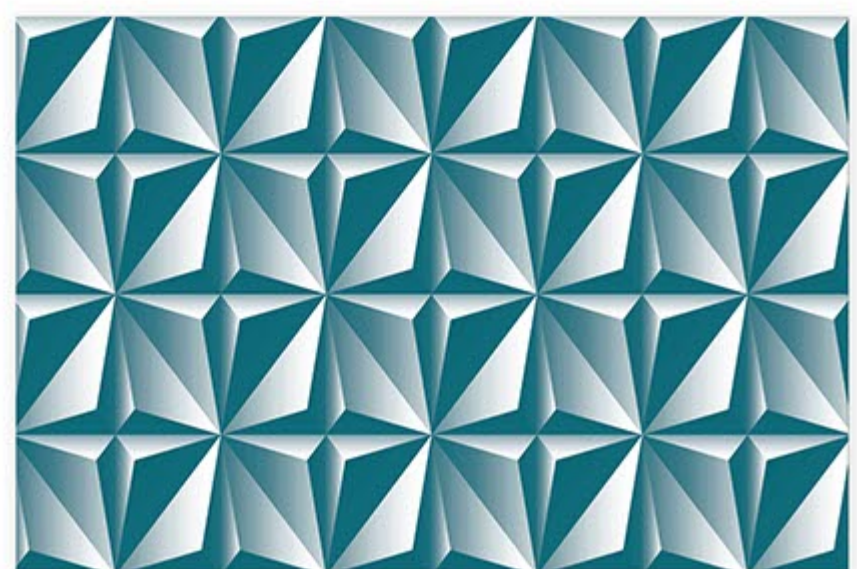

5014 DK

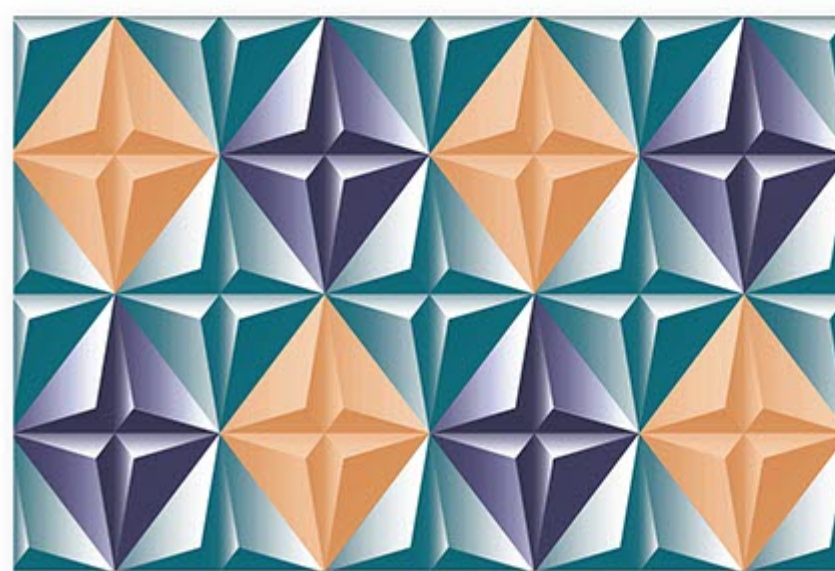

5014 HL-1





5015 LT




5015 DK




5015 HL-1




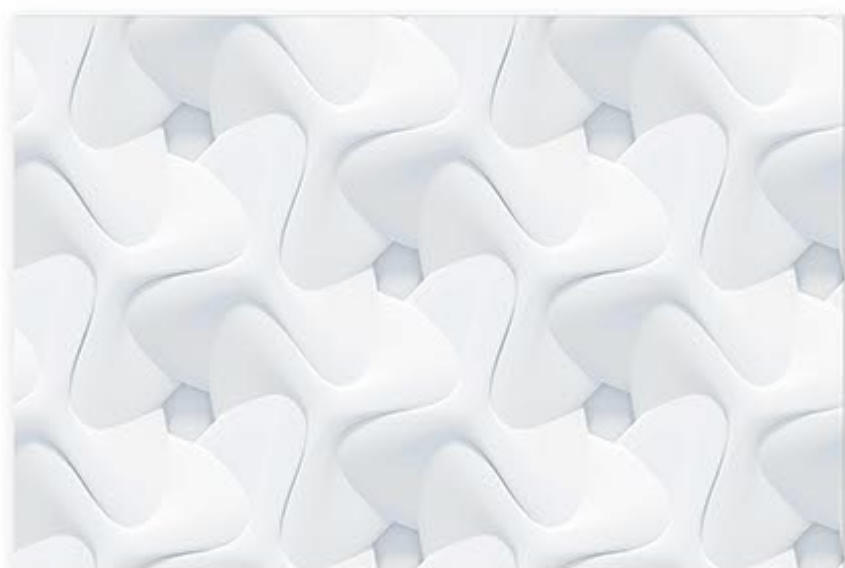

5016 LT

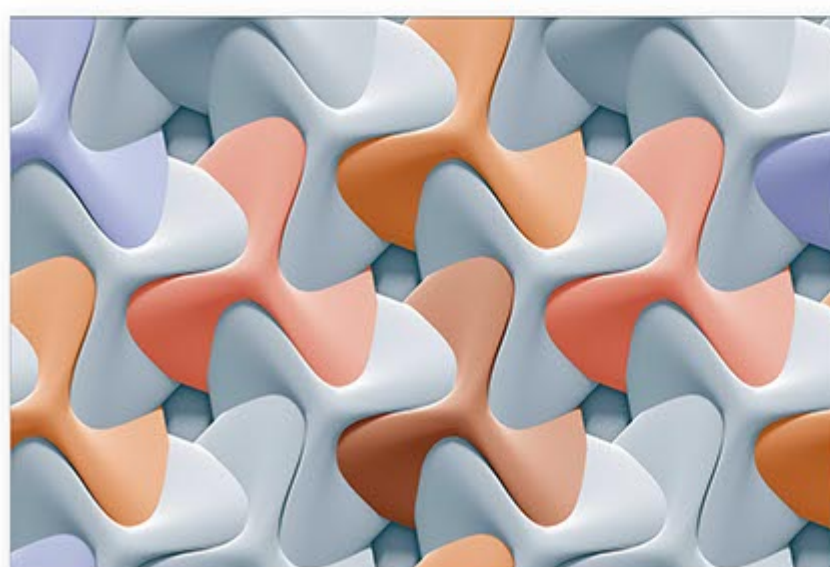


5016 HL-1

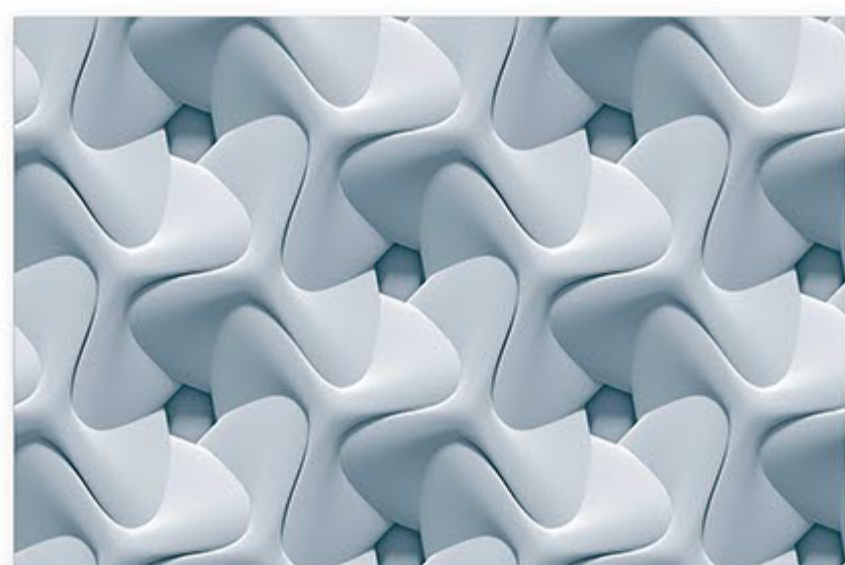

5016 DK




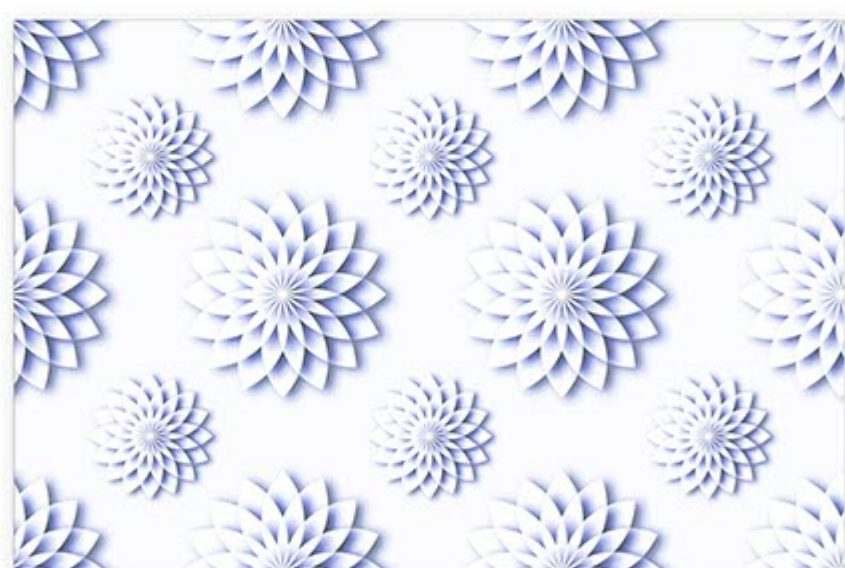

5017 LT



5017 DK

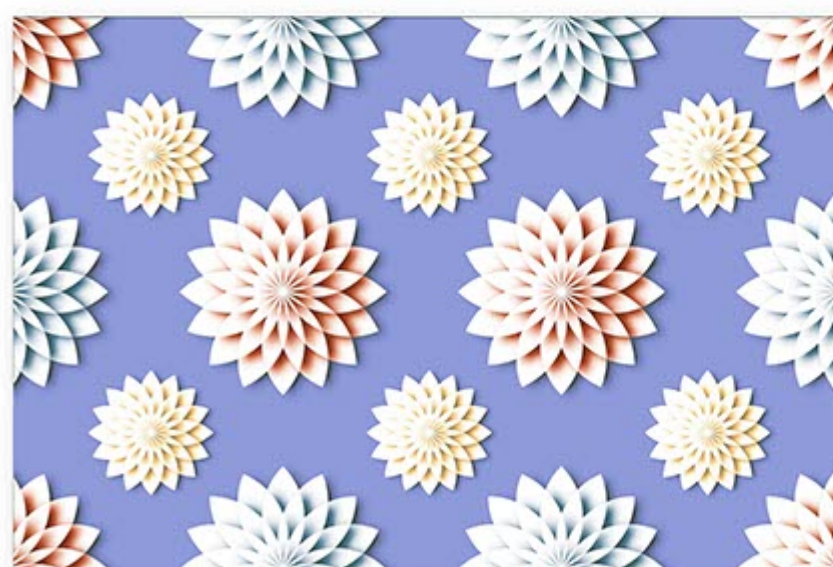

5017 HL-1



WATERPROOF






5018 LT




5018 LT

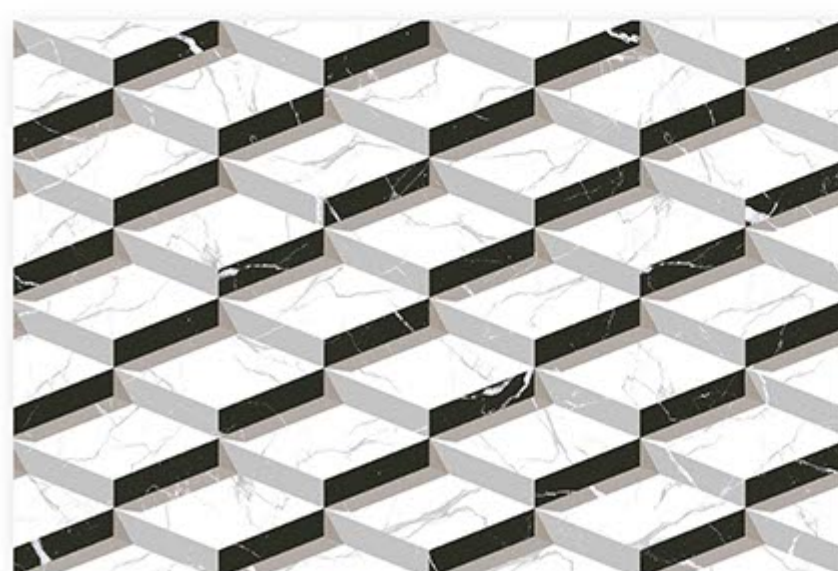

5018 HL-1




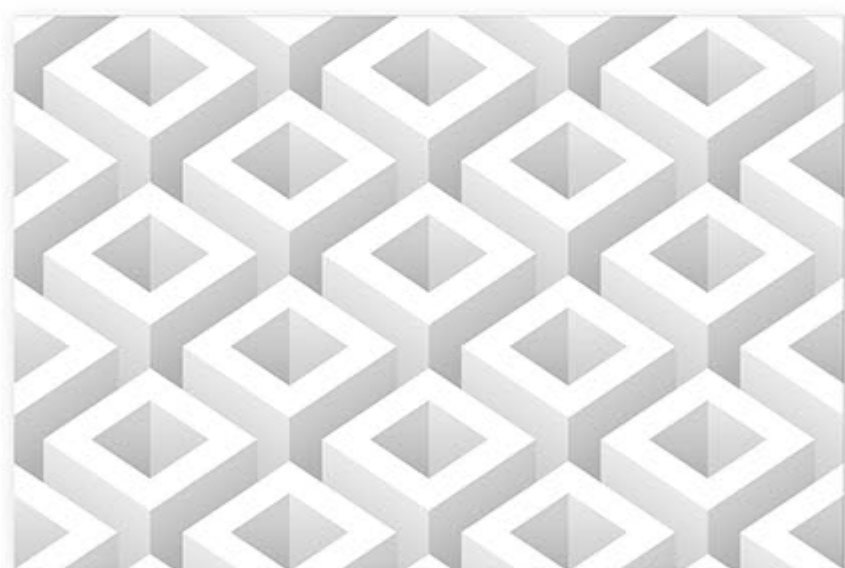

5019 LT



5019 HL-1

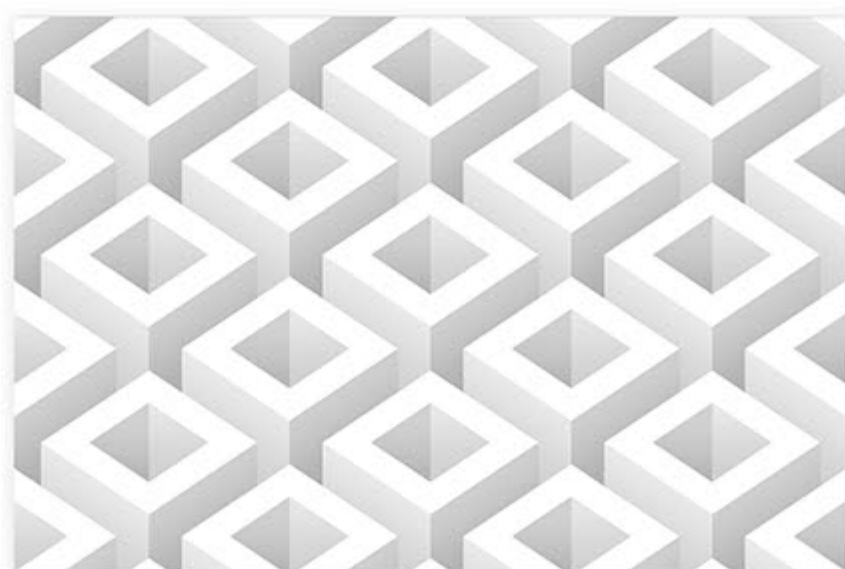


5019 LT






5020 LT

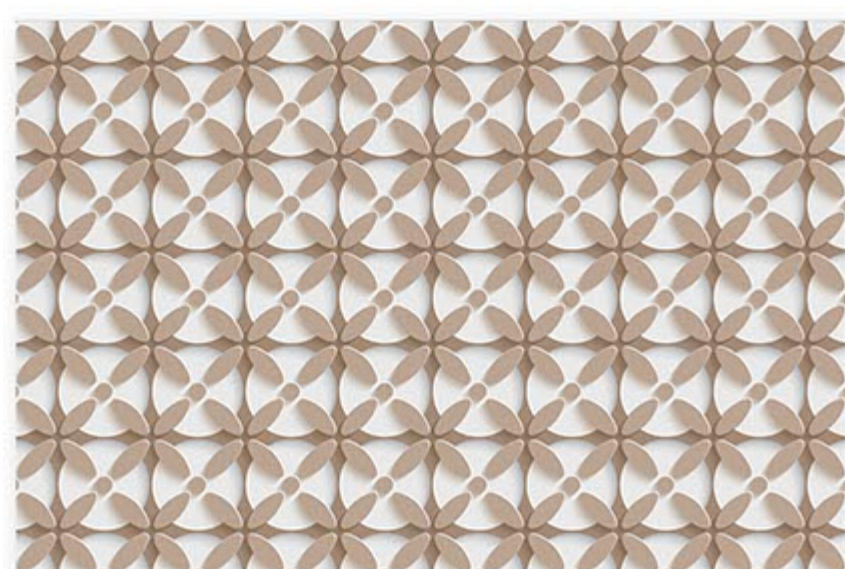

5020 DK

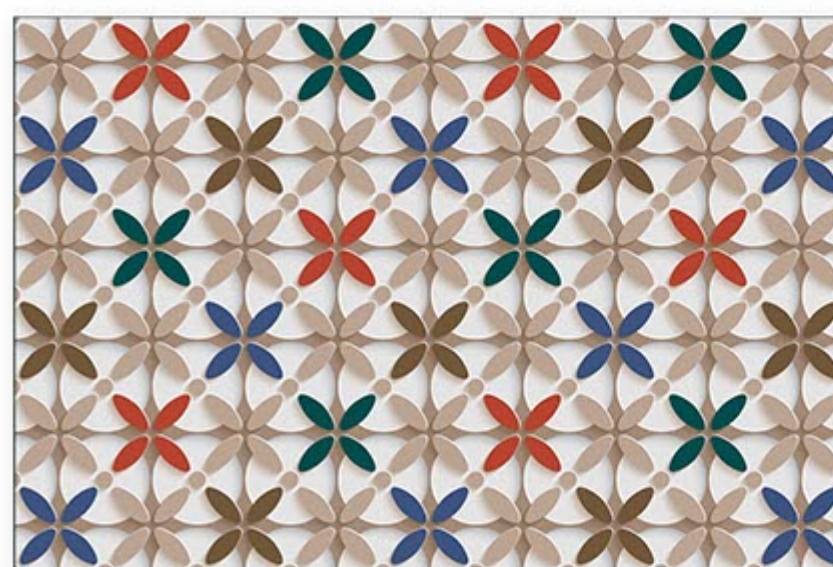

5020 HL-1





WATERPROOF

TECHNICAL SPECIFICATION

CHARACTERISTICS	EURO STANDARDS EN - 159/IS 13753	FLORICE VALUES
DIMENSION & SURFACE QUALITY		
1 Dimension & Surface Quality	±0.5%	±0.2%
2 Deviation in Thickness	±0.6mm	±0.2mm
3 Straightness of sides	±0.3%	±0.2%
4 Rectangularity	±0.5%	±0.3%
5 Surface Flatness	±0.5%	±0.3%
6 Surface Quality	Min 95%	Min 96%
PHYSICAL PROPERTIES		
1 Water Absorption	> 10%	14.17%
2 Bending Strenght	> 150 Kg/Cm ²	200-250 Kg/Cm ²
3 Scratch hardness (Mohs)	Min 3	Min 3
4 Crazing	1 Cycle	3 Cycles
CHEMICAL PROPERTIES		
1 Staining Resistance	Min Class 2	Resistance to all Acids and Alkalies & Household Chemicals, except Hydro Flouric Acid
2 Household Chemical	Min Class B	
THERMAL PROPERTIES		
1 Thermal Shock	Resistant to 10 Cycles	CONFORMS
2 Thermal Expansion	Max-9E-06	CONFORMS

PACKING DETAILS

Size	Thickness (Approx)	No. of Tiles	Area Sq. Mtr.	Weight (Approx)
Wall Tiles - 300x450	8.0(Approx)	6	0.81	11.20 Kgs.
Floor Tiles - 300x300	8.0(Approx)	9	0.81	11.20 Kgs.

FLORICE CERAMIC LLP

Survey No. 507/2, B/h. admin Vitrified,
 At. Bela (Ranpar) Jetpar Road, Morbi - 363642 (Guj.) INDIA
 e-mail : floriceceramic@gmail.com
 Web. www.floriceceramic.com
 Call : +91 95120 23201 / 202 / 203