


WATERPROOF




DIGITAL WALL TILES

Exclusive series

PRODUCT CATALOUGE

Fish
Series


300 x 450mm

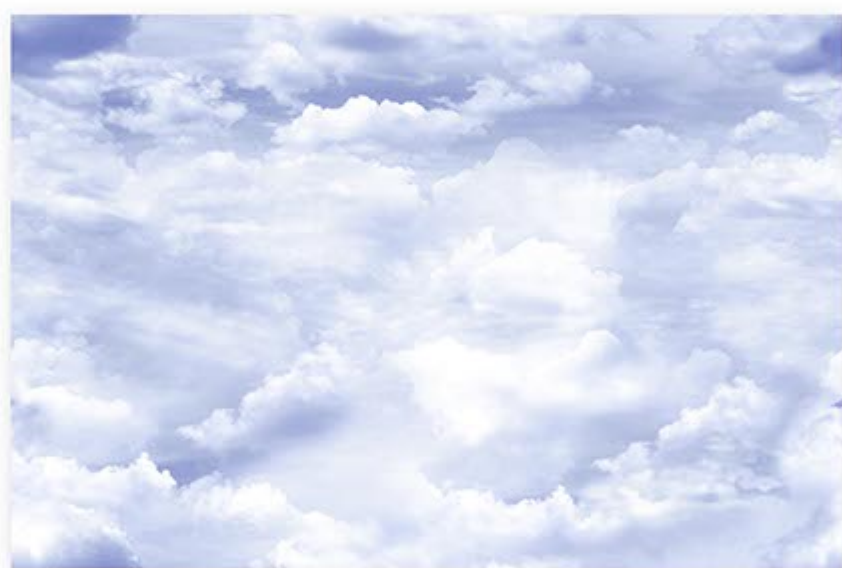

F-1001 LT



F-1001 HL-1 A

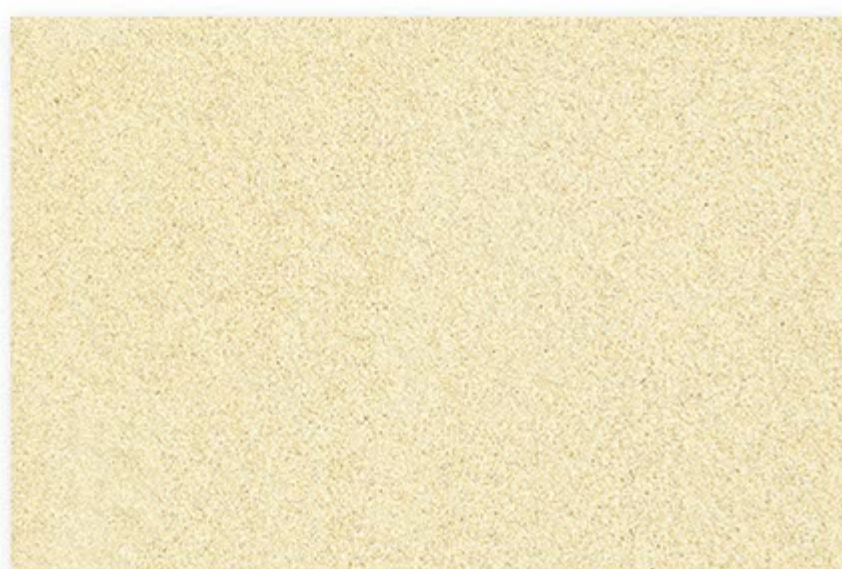

F-1001 DK



F-1001 HL-1 B







F-1002 LT



F-1002 HL-1 A

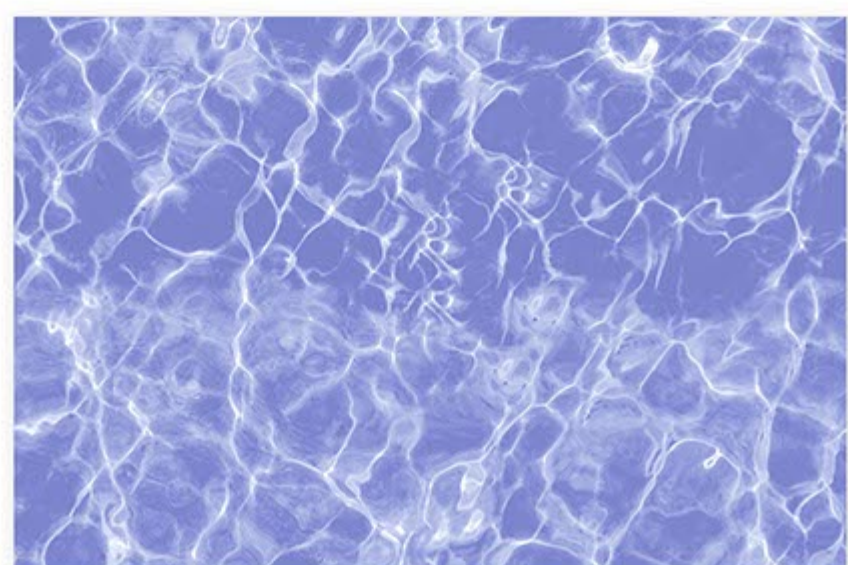

F-1002 DK

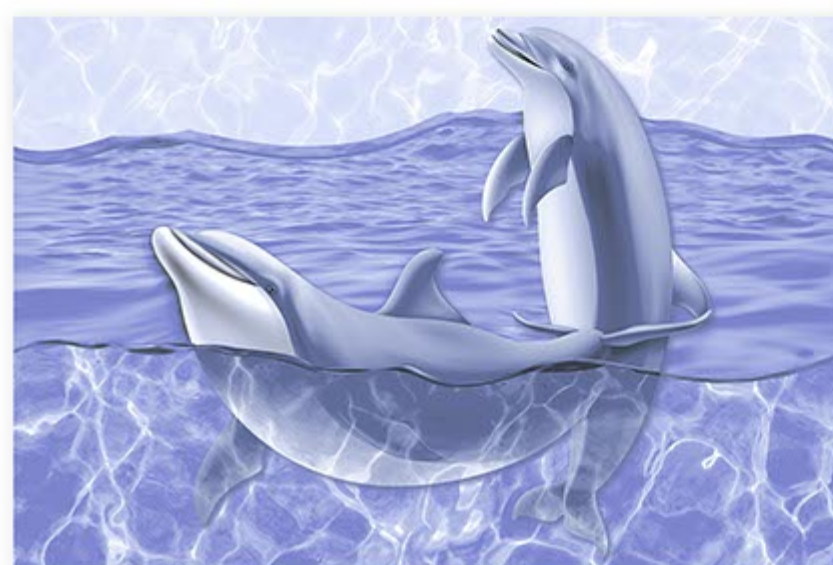

F-1002 HL-1 B






F-1003 LT



F-1003 HL-1 A

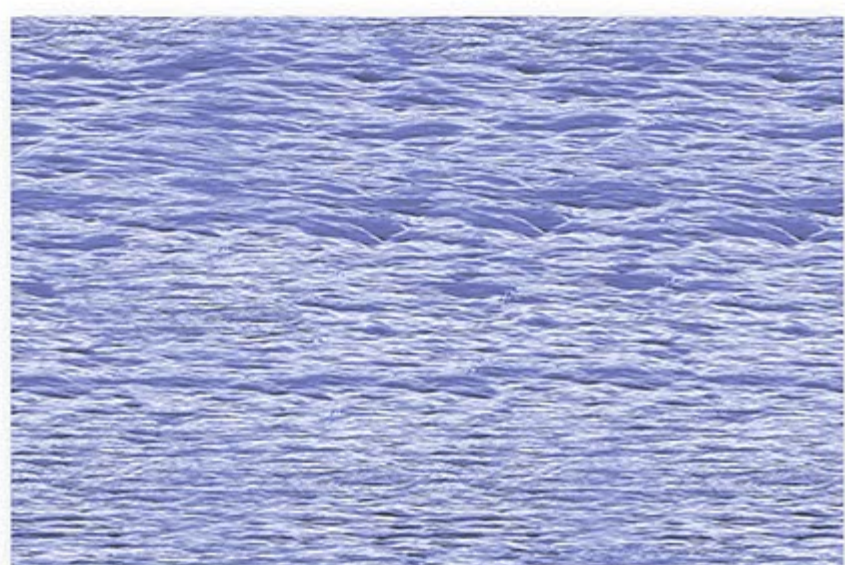


F-1003 DK



F-1003 HL-1 B




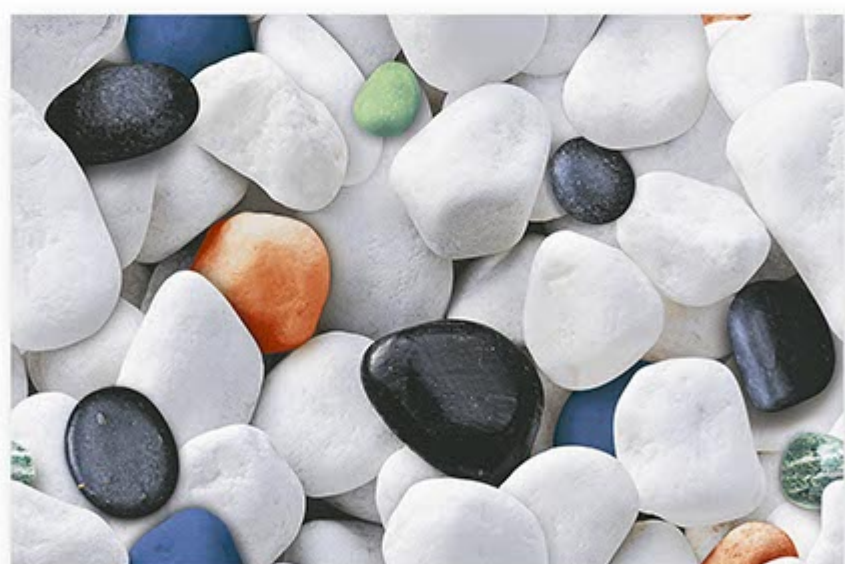

F-1004 LT



F-1004 HL-1 A

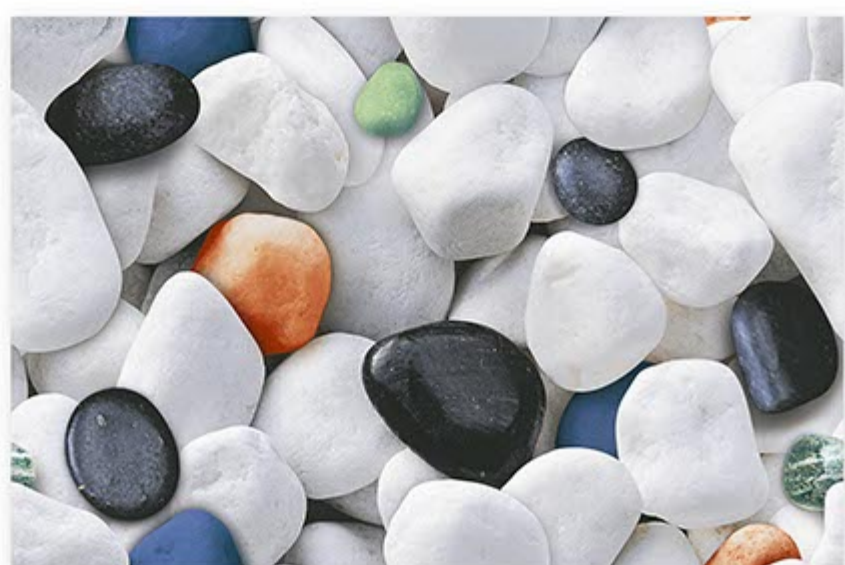


F-1004 LT



F-1004 HL-1 B




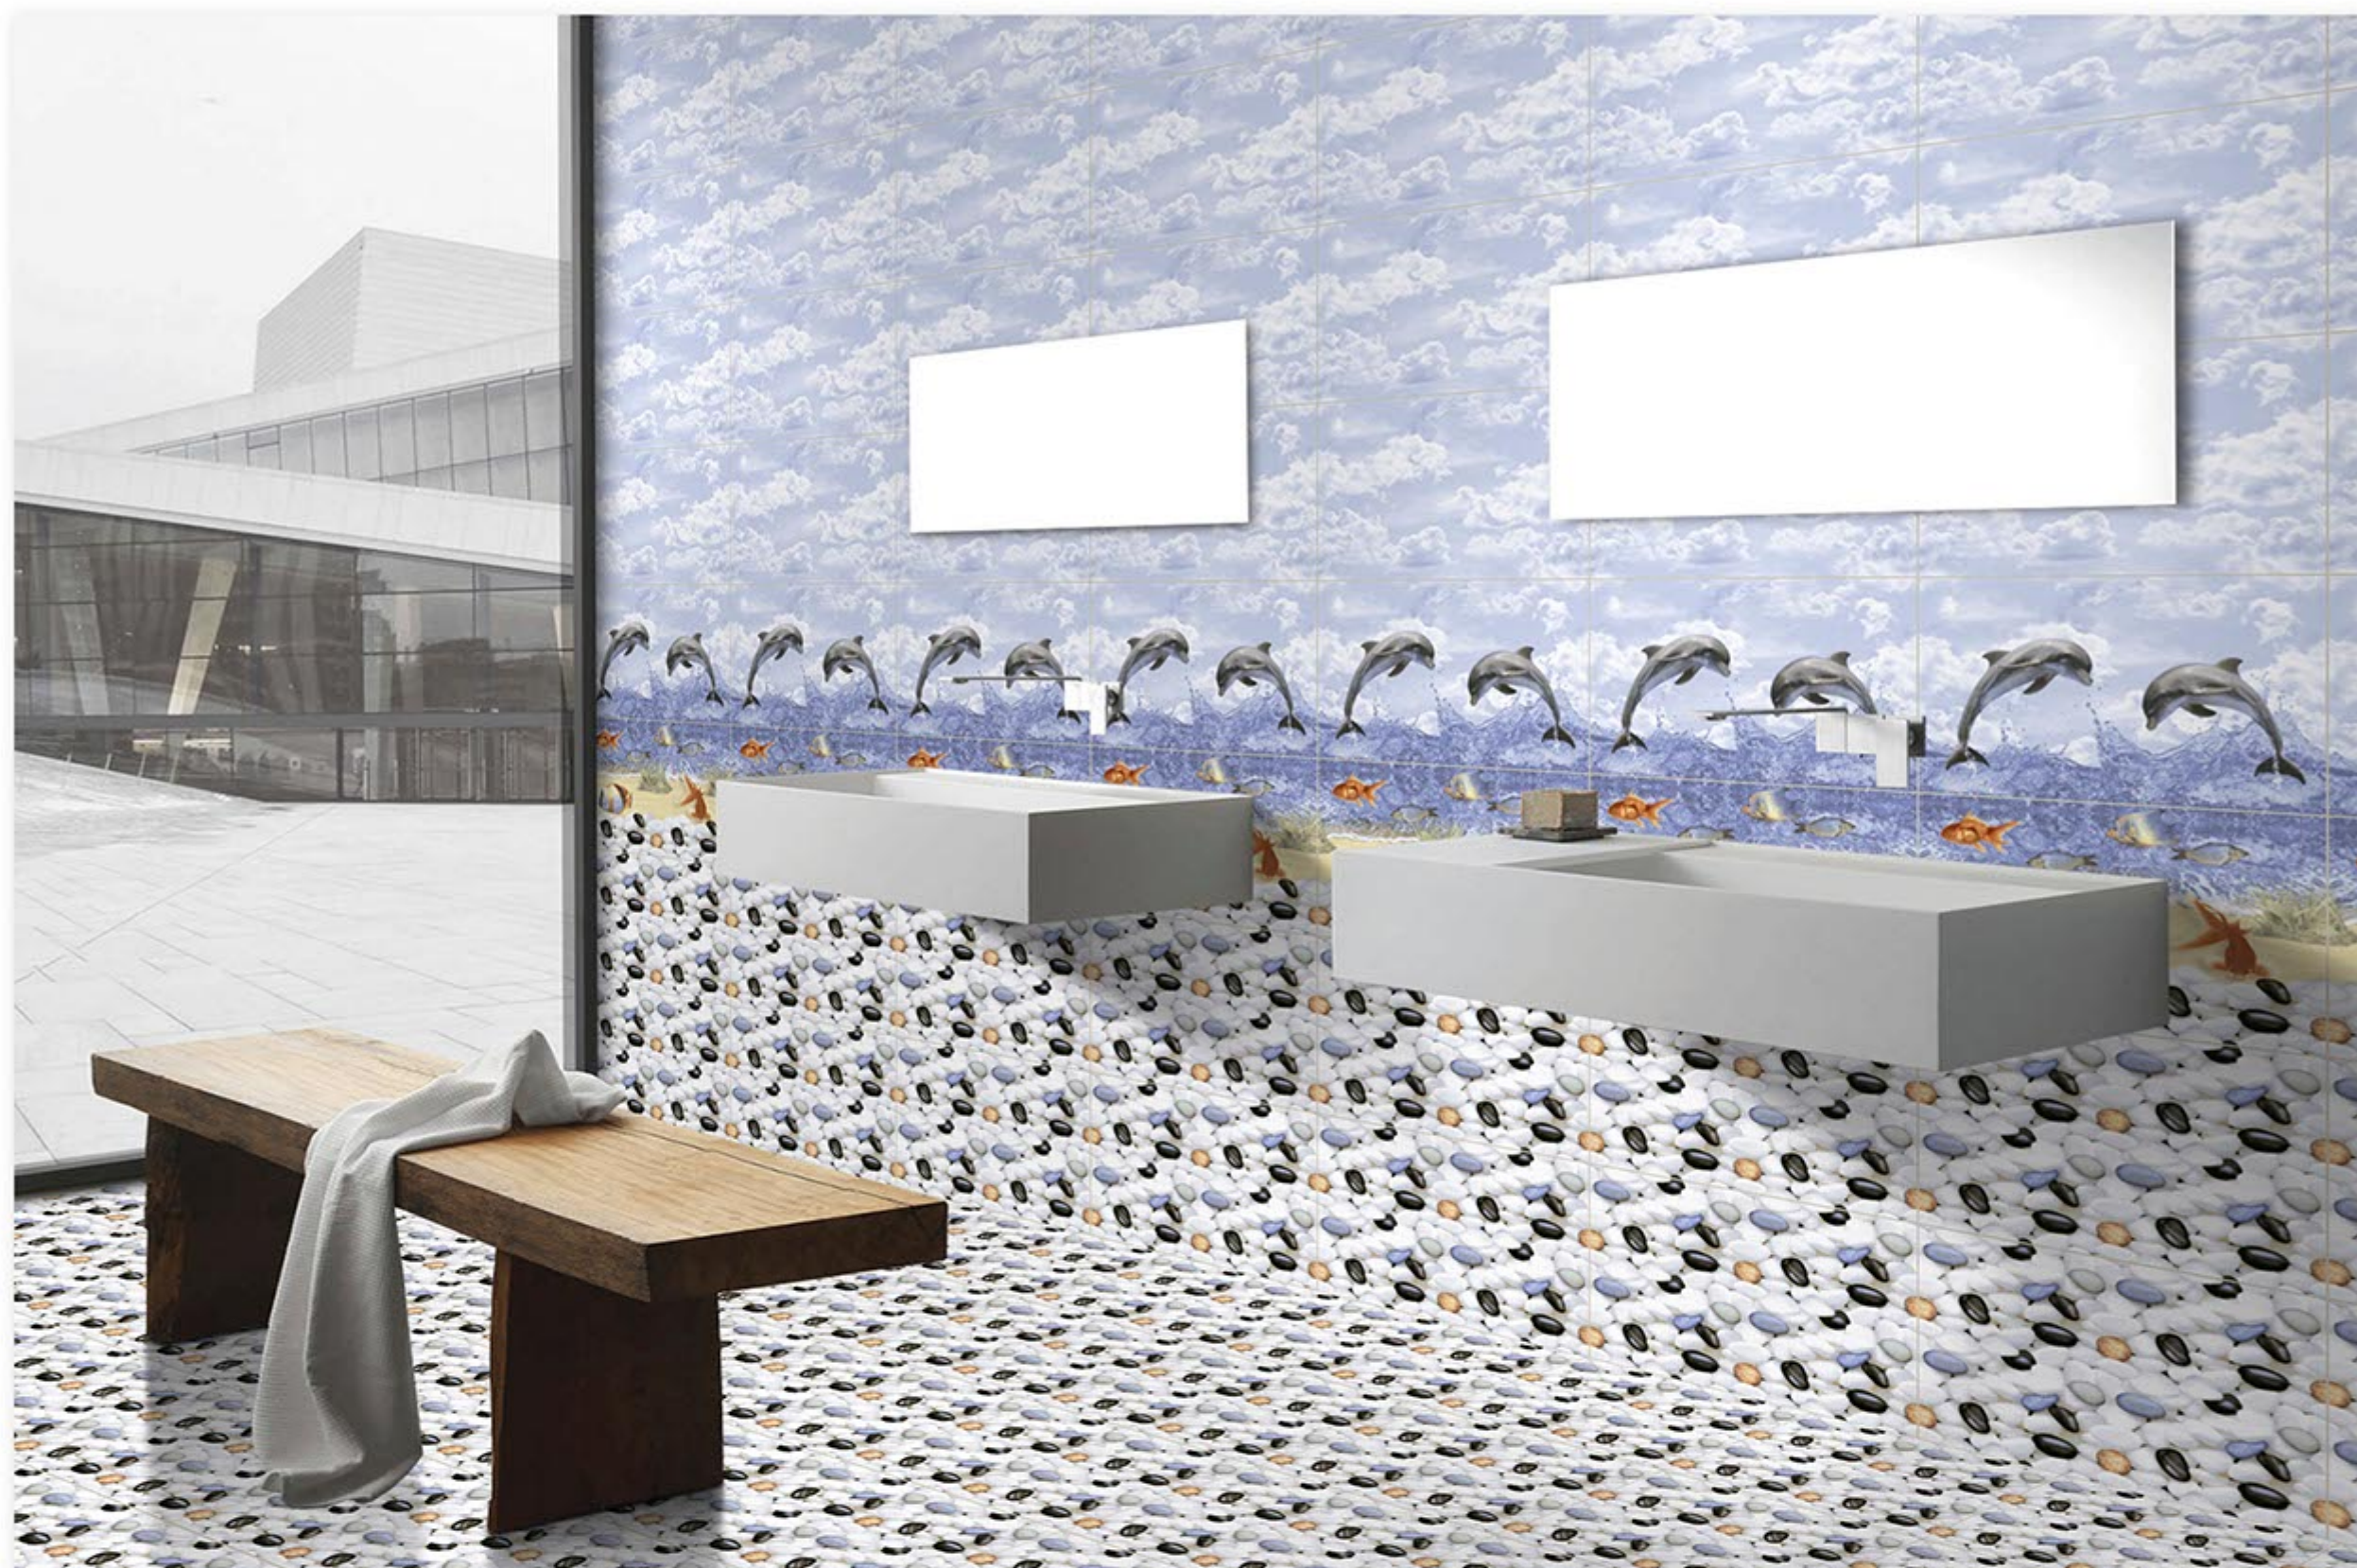

F-1005 LT



F-1005 HL-1 A

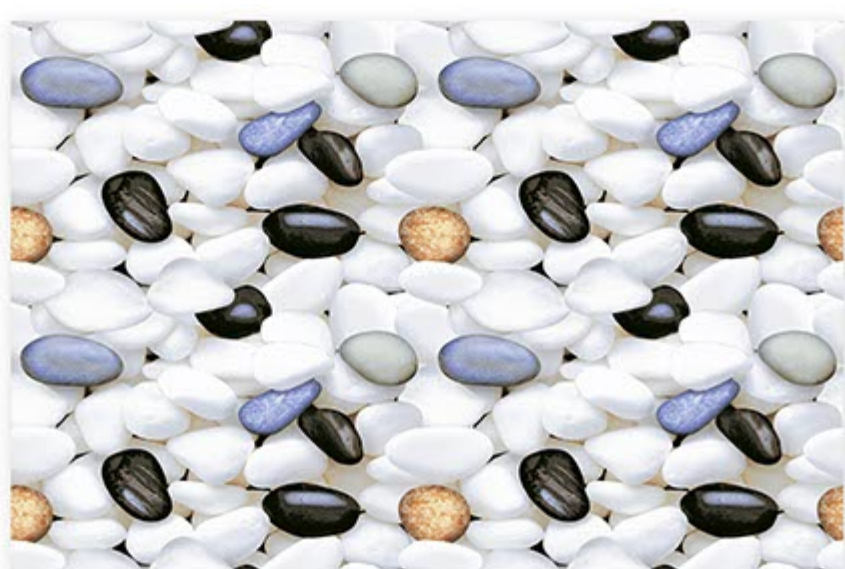

F-1005 DK



F-1005 HL-1 B





F-1006 DK-1



F-1006 HL-1 A



F-1006 DK-2



F-1006 HL-1 B



F-1006 LT






F-1007 LT Aqua



F-1007 HL-1 Aqua

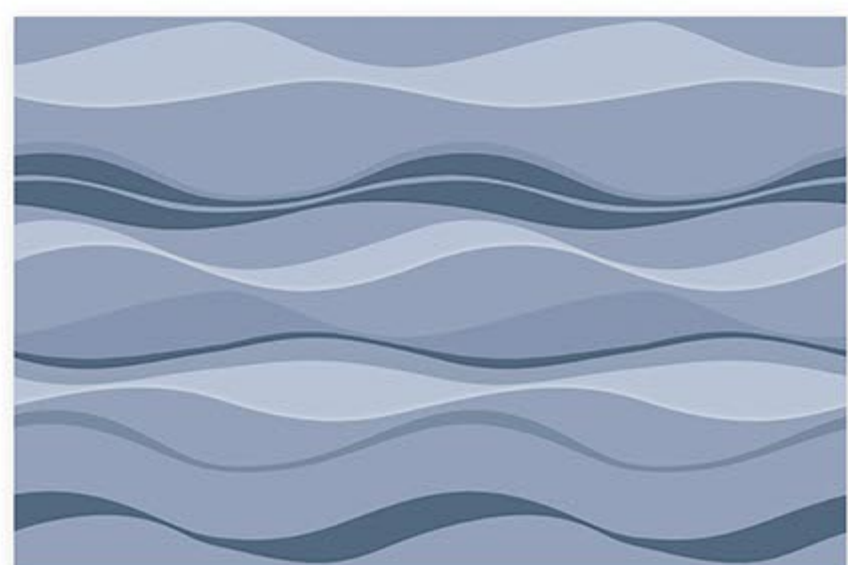

F-1007 DK Aqua



F-1007 HL-2 Aqua





F-1007 LT Blue



F-1007 HL-1 Blue




F-1007 LT Blue




F-1007 HL-2 Blue




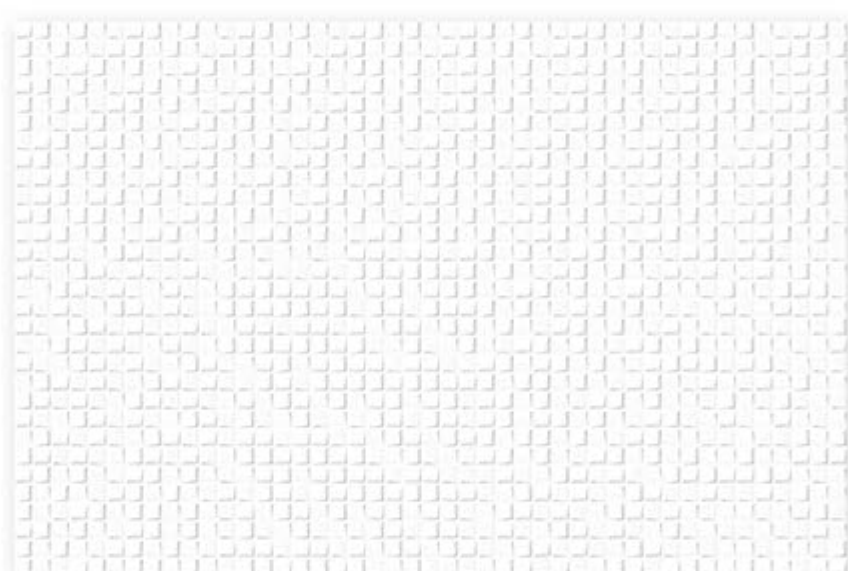


F-1008 LT

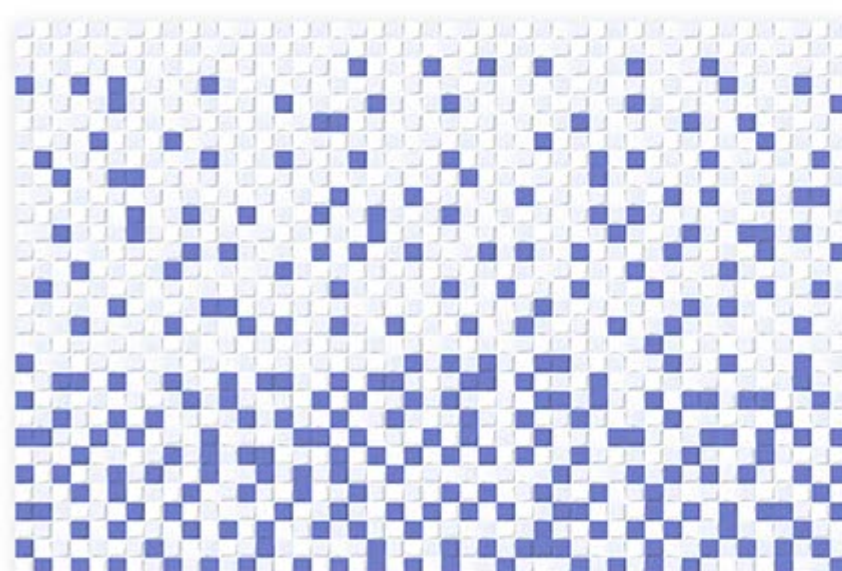

F-1008 HL-1

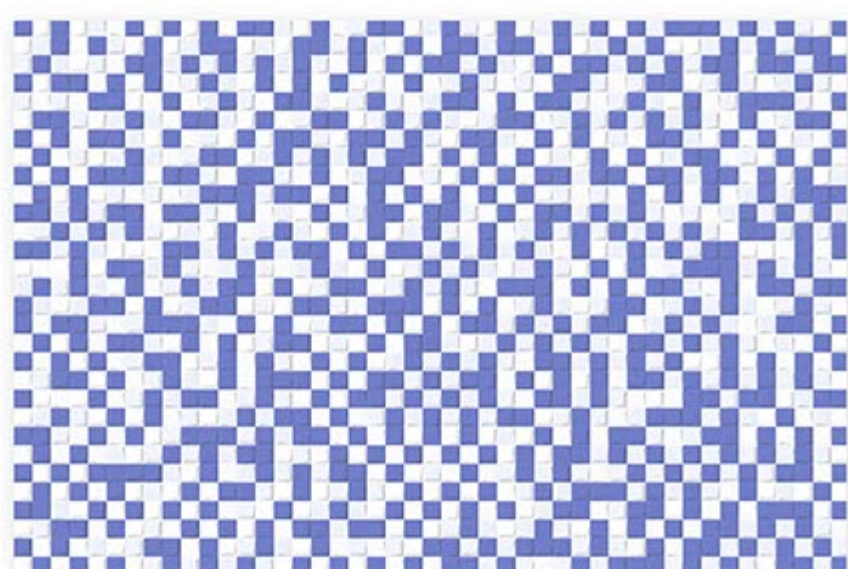


F-1008 DK

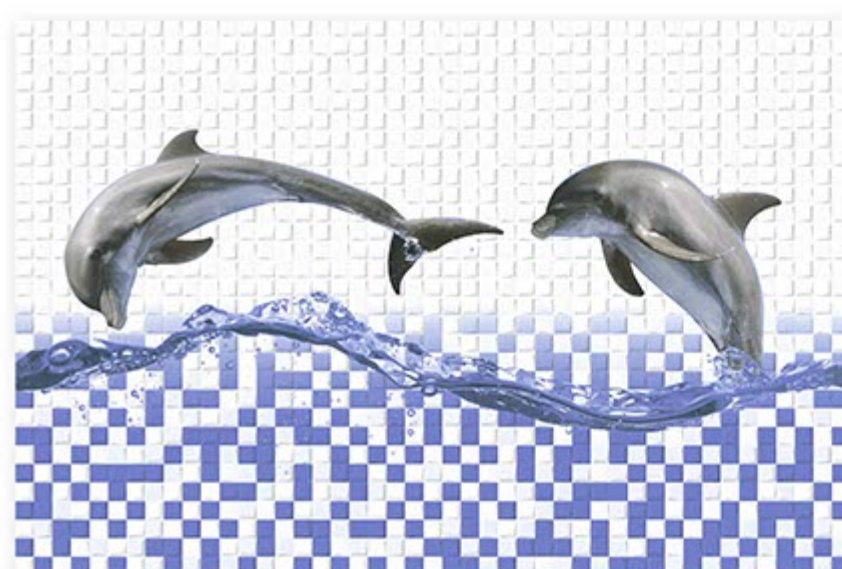

F-1008 HL-2




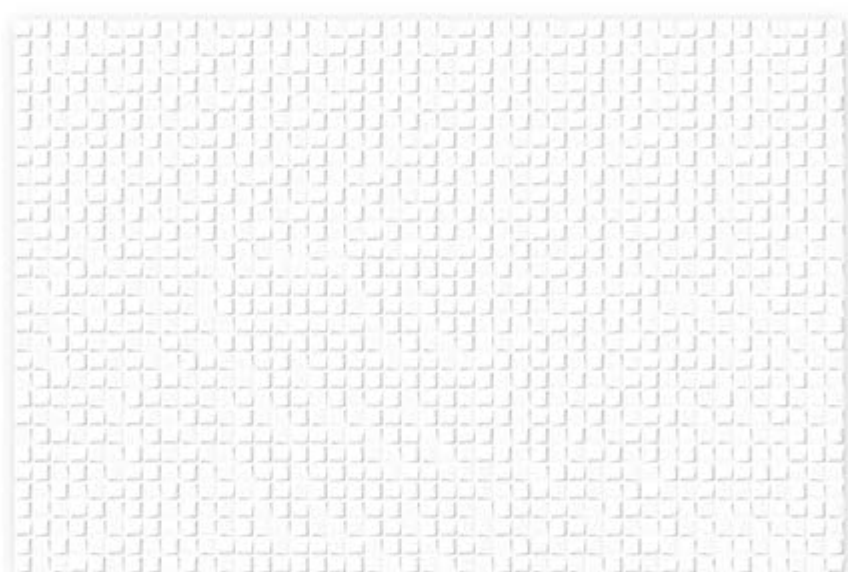

F-1009 LT



F-1009 DK

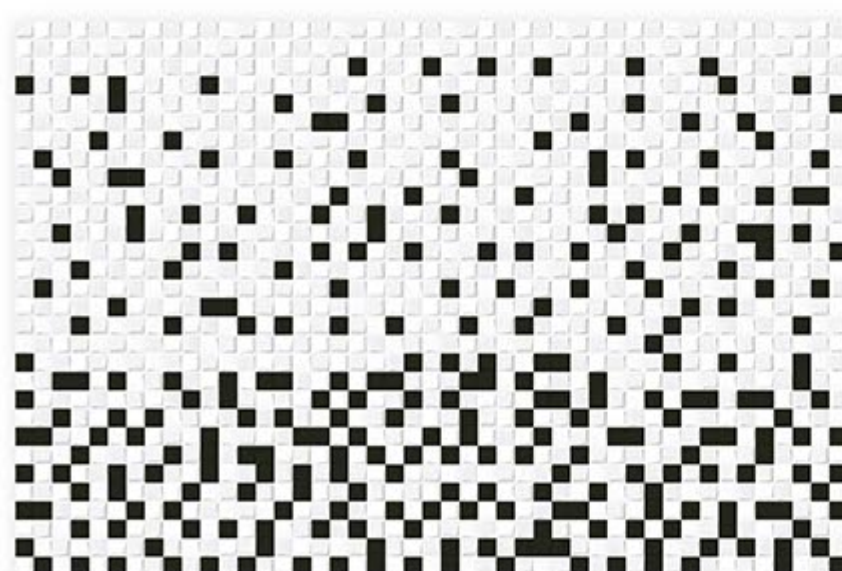

F-1009 HL-1






F-1011 LT



F-1011 HL-1

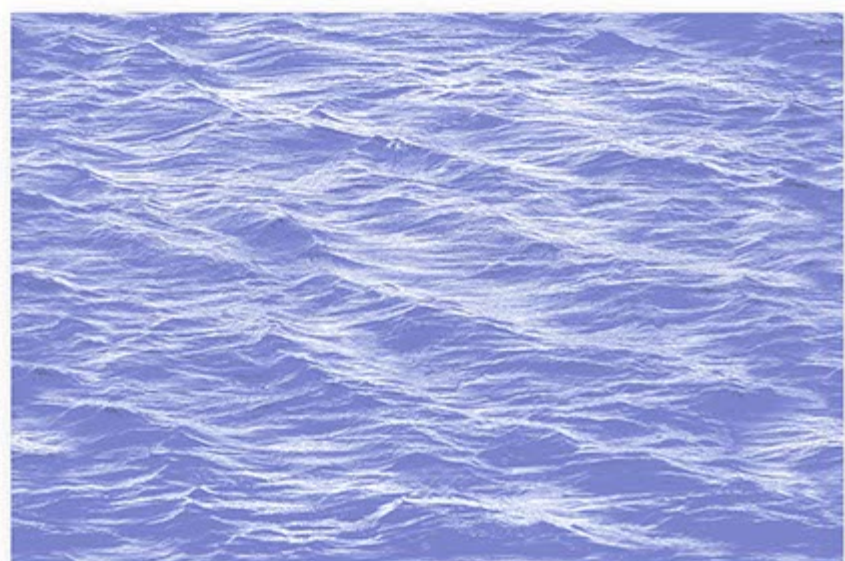

F-1011 DK



F-1011 HL-2





F-1012 LT



F-1012 HL-1




F-1012 DK




F-1012 HL-2




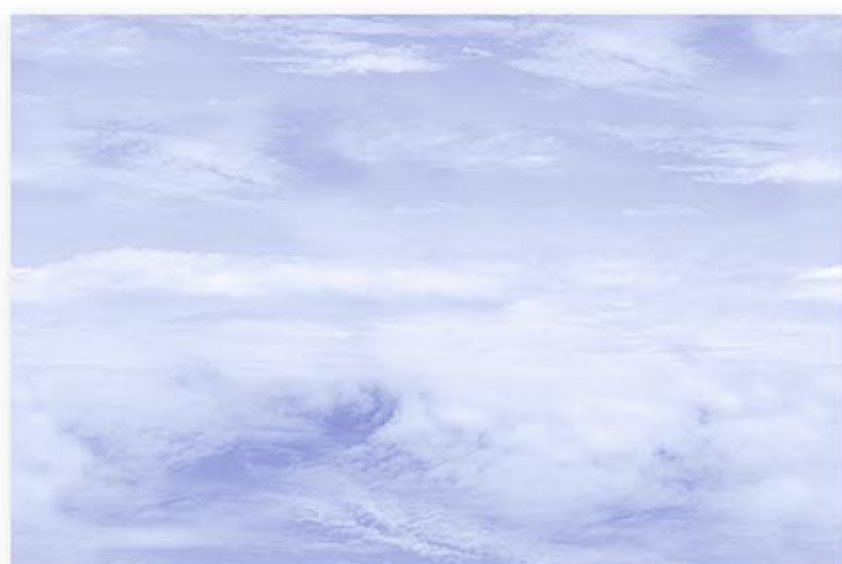


F-1013 LT

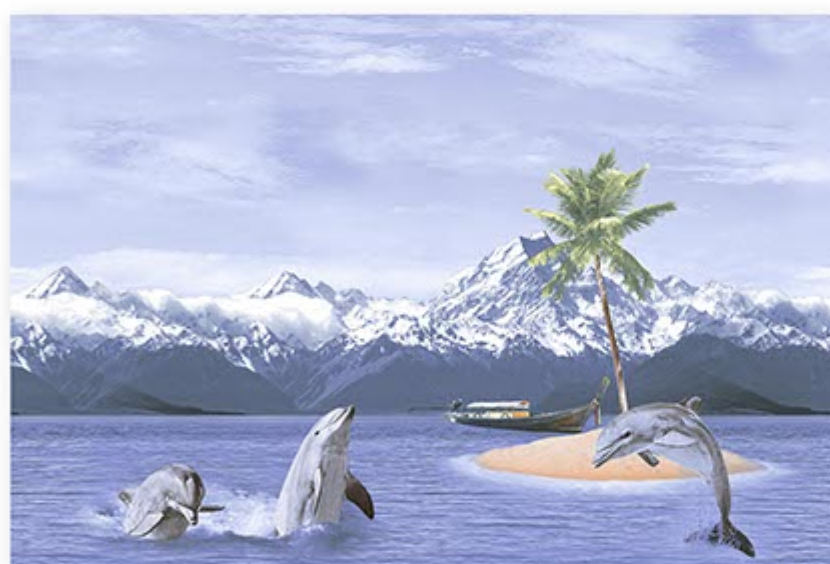

F-1013 HL-1

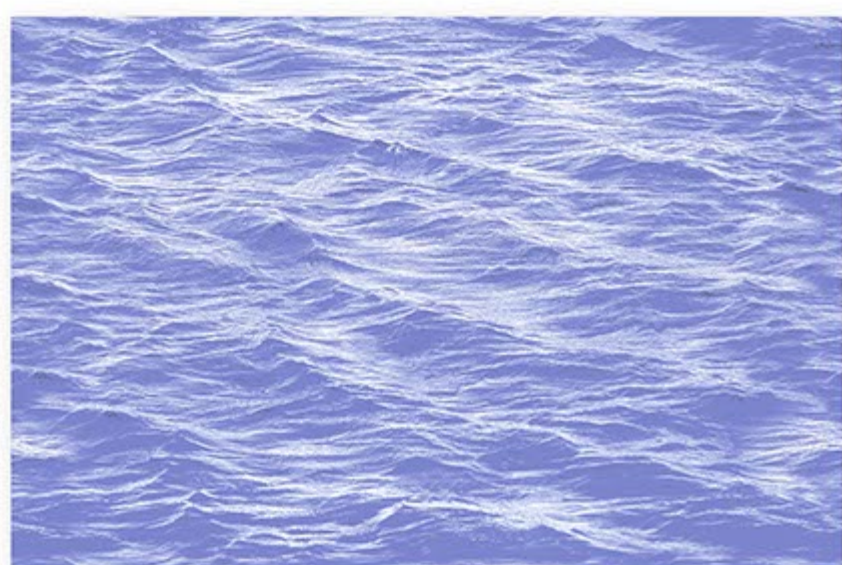

F-1013 DK

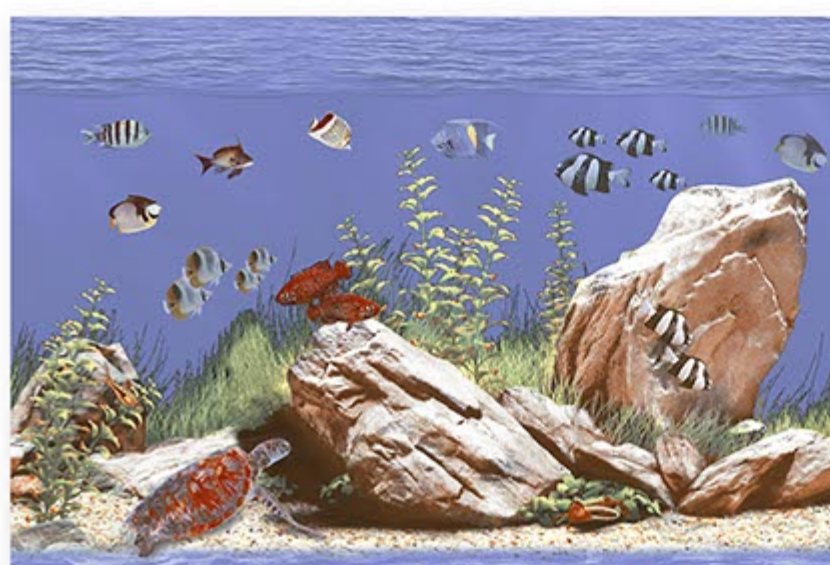

F-1013 HL-2





F-1015 LT



F-1015 HL-1 A




F-1015 DK



F-1015 HL-1 B



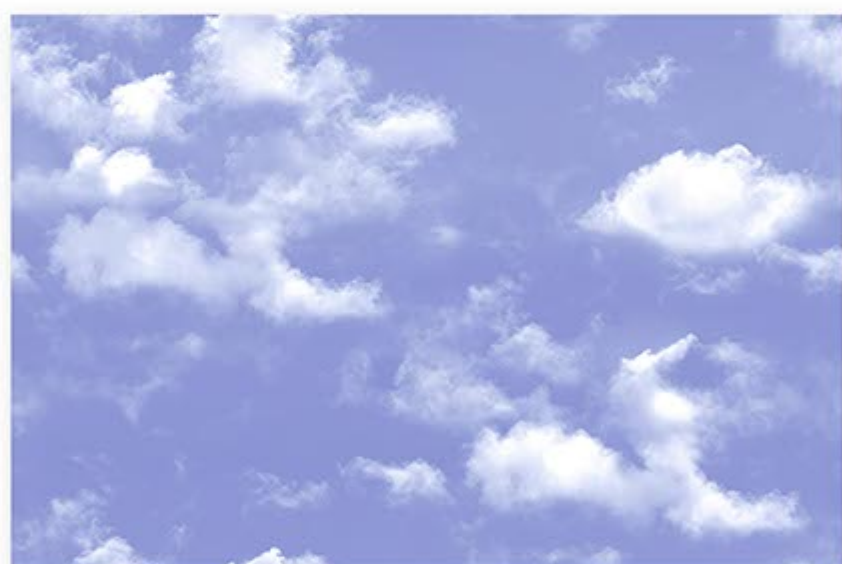

F-1017 LT



F-1017 HL-1



F-1017 DK




F-1017 HL-2






F-1018 LT

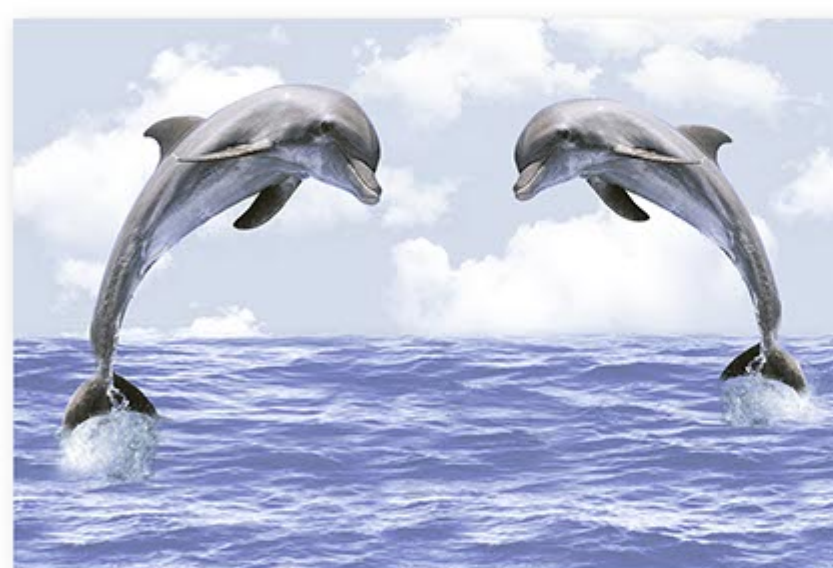

F-1018 HL-1



F-1018 DK

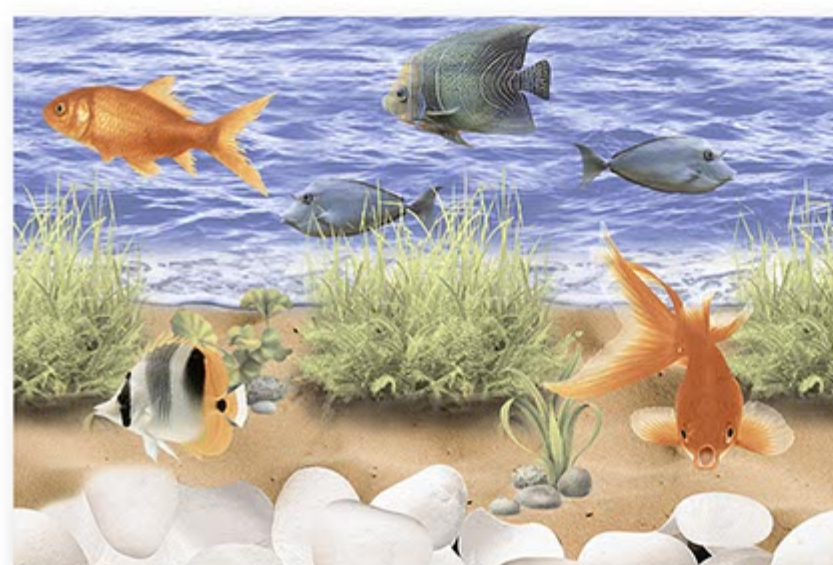

F-1018 HL-2







F-1019 LT



F-1019 HL-1 A

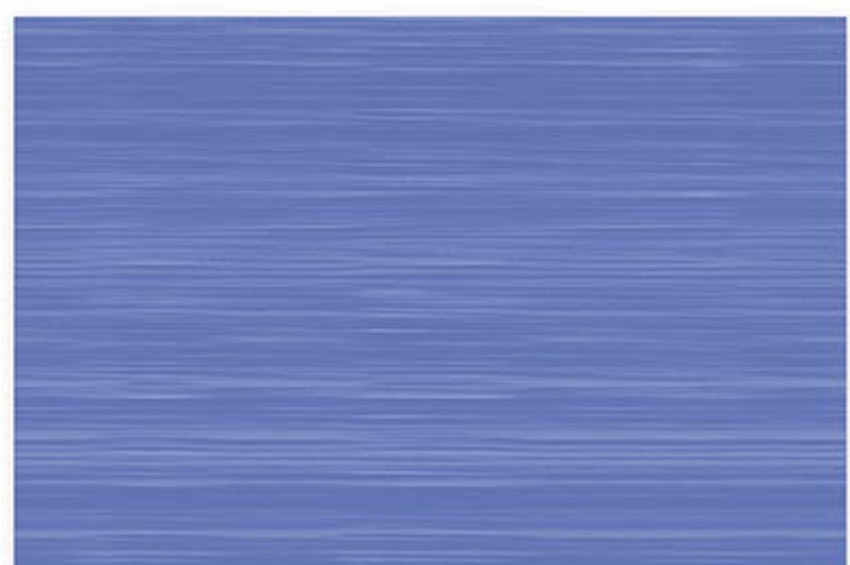

F-1019 DK

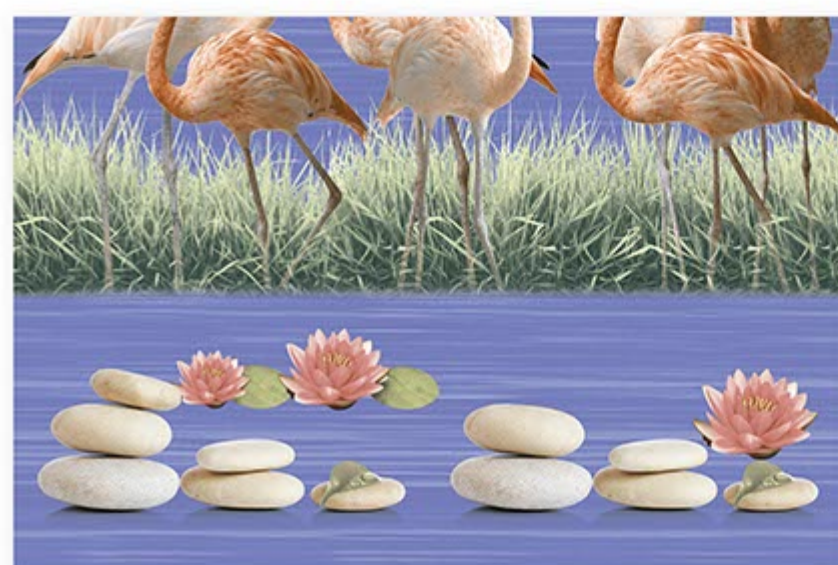

F-1019 HL-2 B






F-1019 LT



F-1019 HL-2 A

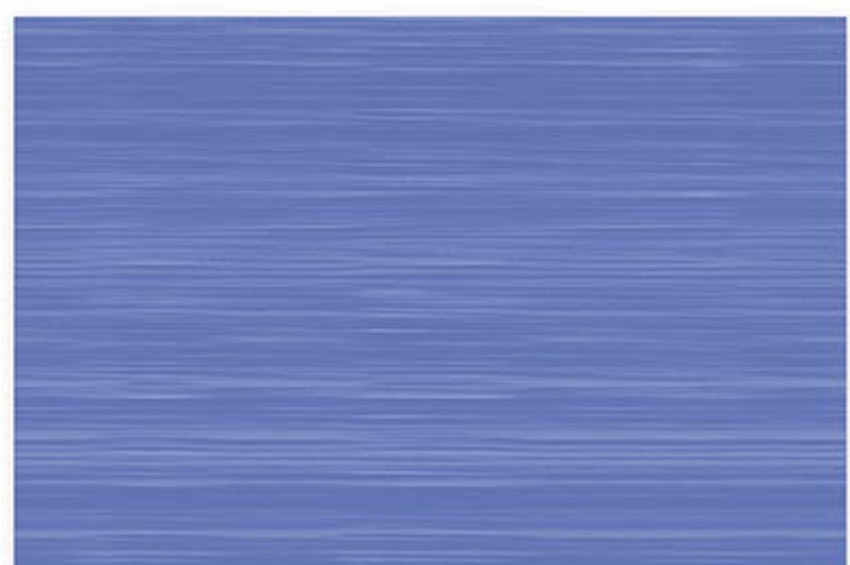

F-1019 DK



F-1019 HL-2 B





WATERPROOF

TECHNICAL SPECIFICATION

CHARACTERISTICS	EURO STANDARDS EN - 159/IS 13753	FLORICE VALUES
DIMENSION & SURFACE QUALITY		
1 Dimension & Surface Quality	±0.5%	±0.2%
2 Deviation in Thickness	±0.6mm	±0.2mm
3 Straightness of sides	±0.3%	±0.2%
4 Rectangularity	±0.5%	±0.3%
5 Surface Flatness	±0.5%	±0.3%
6 Surface Quality	Min 95%	Min 96%
PHYSICAL PROPERTIES		
1 Water Absorption	> 10%	14.17%
2 Bending Strenght	> 150 Kg/Cm ²	200-250 Kg/Cm ²
3 Scratch hardness (Mohs)	Min 3	Min 3
4 Crazing	1 Cycle	3 Cycles
CHEMICAL PROPERTIES		
1 Staining Resistance	Min Class 2	Resistance to all Acids and Alkalies & Household Chemicals, except Hydro Flouric Acid
2 Household Chemical	Min Class B	
THERMAL PROPERTIES		
1 Thermal Shock	Resistant to 10 Cycles	CONFORMS
2 Thermal Expansion	Max-9E-06	CONFORMS

PACKING DETAILS

Size	Thickness (Approx)	No. of Tiles	Area Sq. Mtr.	Weight (Approx)
Wall Tiles - 300x450	8.0(Approx)	6	0.81	11.20 Kgs.
Floor Tiles - 300x300	8.0(Approx)	9	0.81	11.20 Kgs.

FLORICE CERAMIC LLP

Survey No. 507/2, B/h. admin Vitrified,
At. Bela (Ranpar) Jetpar Road, Morbi - 363642 (Guj.) INDIA
e-mail : floriceceramic@gmail.com
Web. www.floriceceramic.com
Call : +91 95120 23201 / 202 / 203