



WATERPROOF



DIGITAL WALL TILES
Exclusive series

PRODUCT CATALOUGE

Glossy
Series

300 x 450mm



P-1051-HL-1




P-1051-LT



P-1051-HL-2




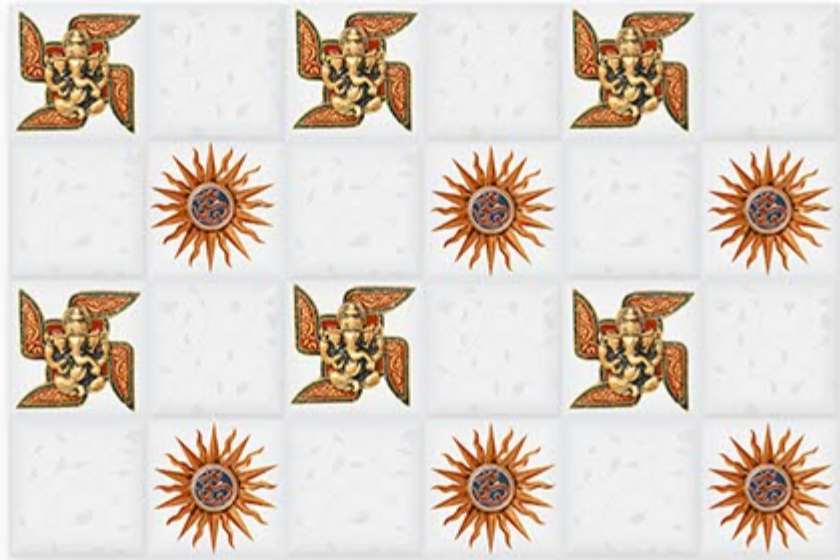

P-1052-HL-1



P-1052-HL-2

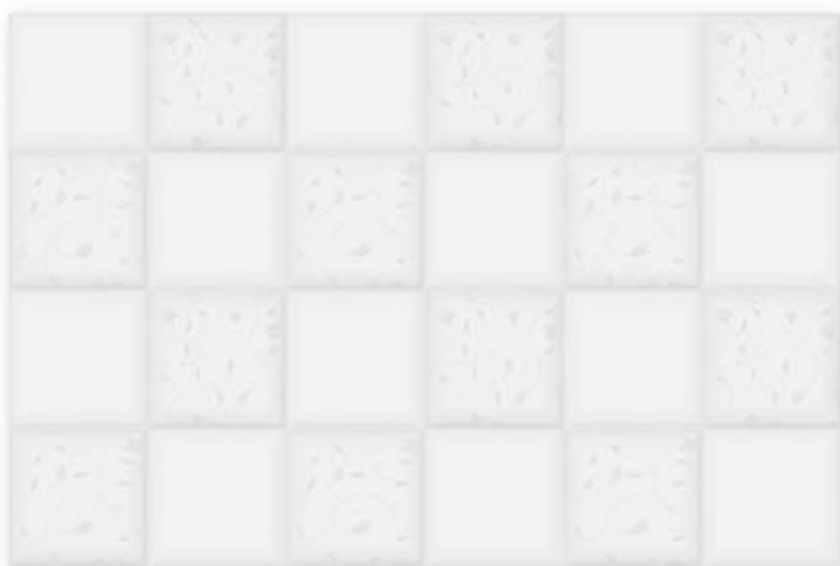

P-1052-LT





P-1053-HL-2




P-1053-HL-1



P-1053-LT



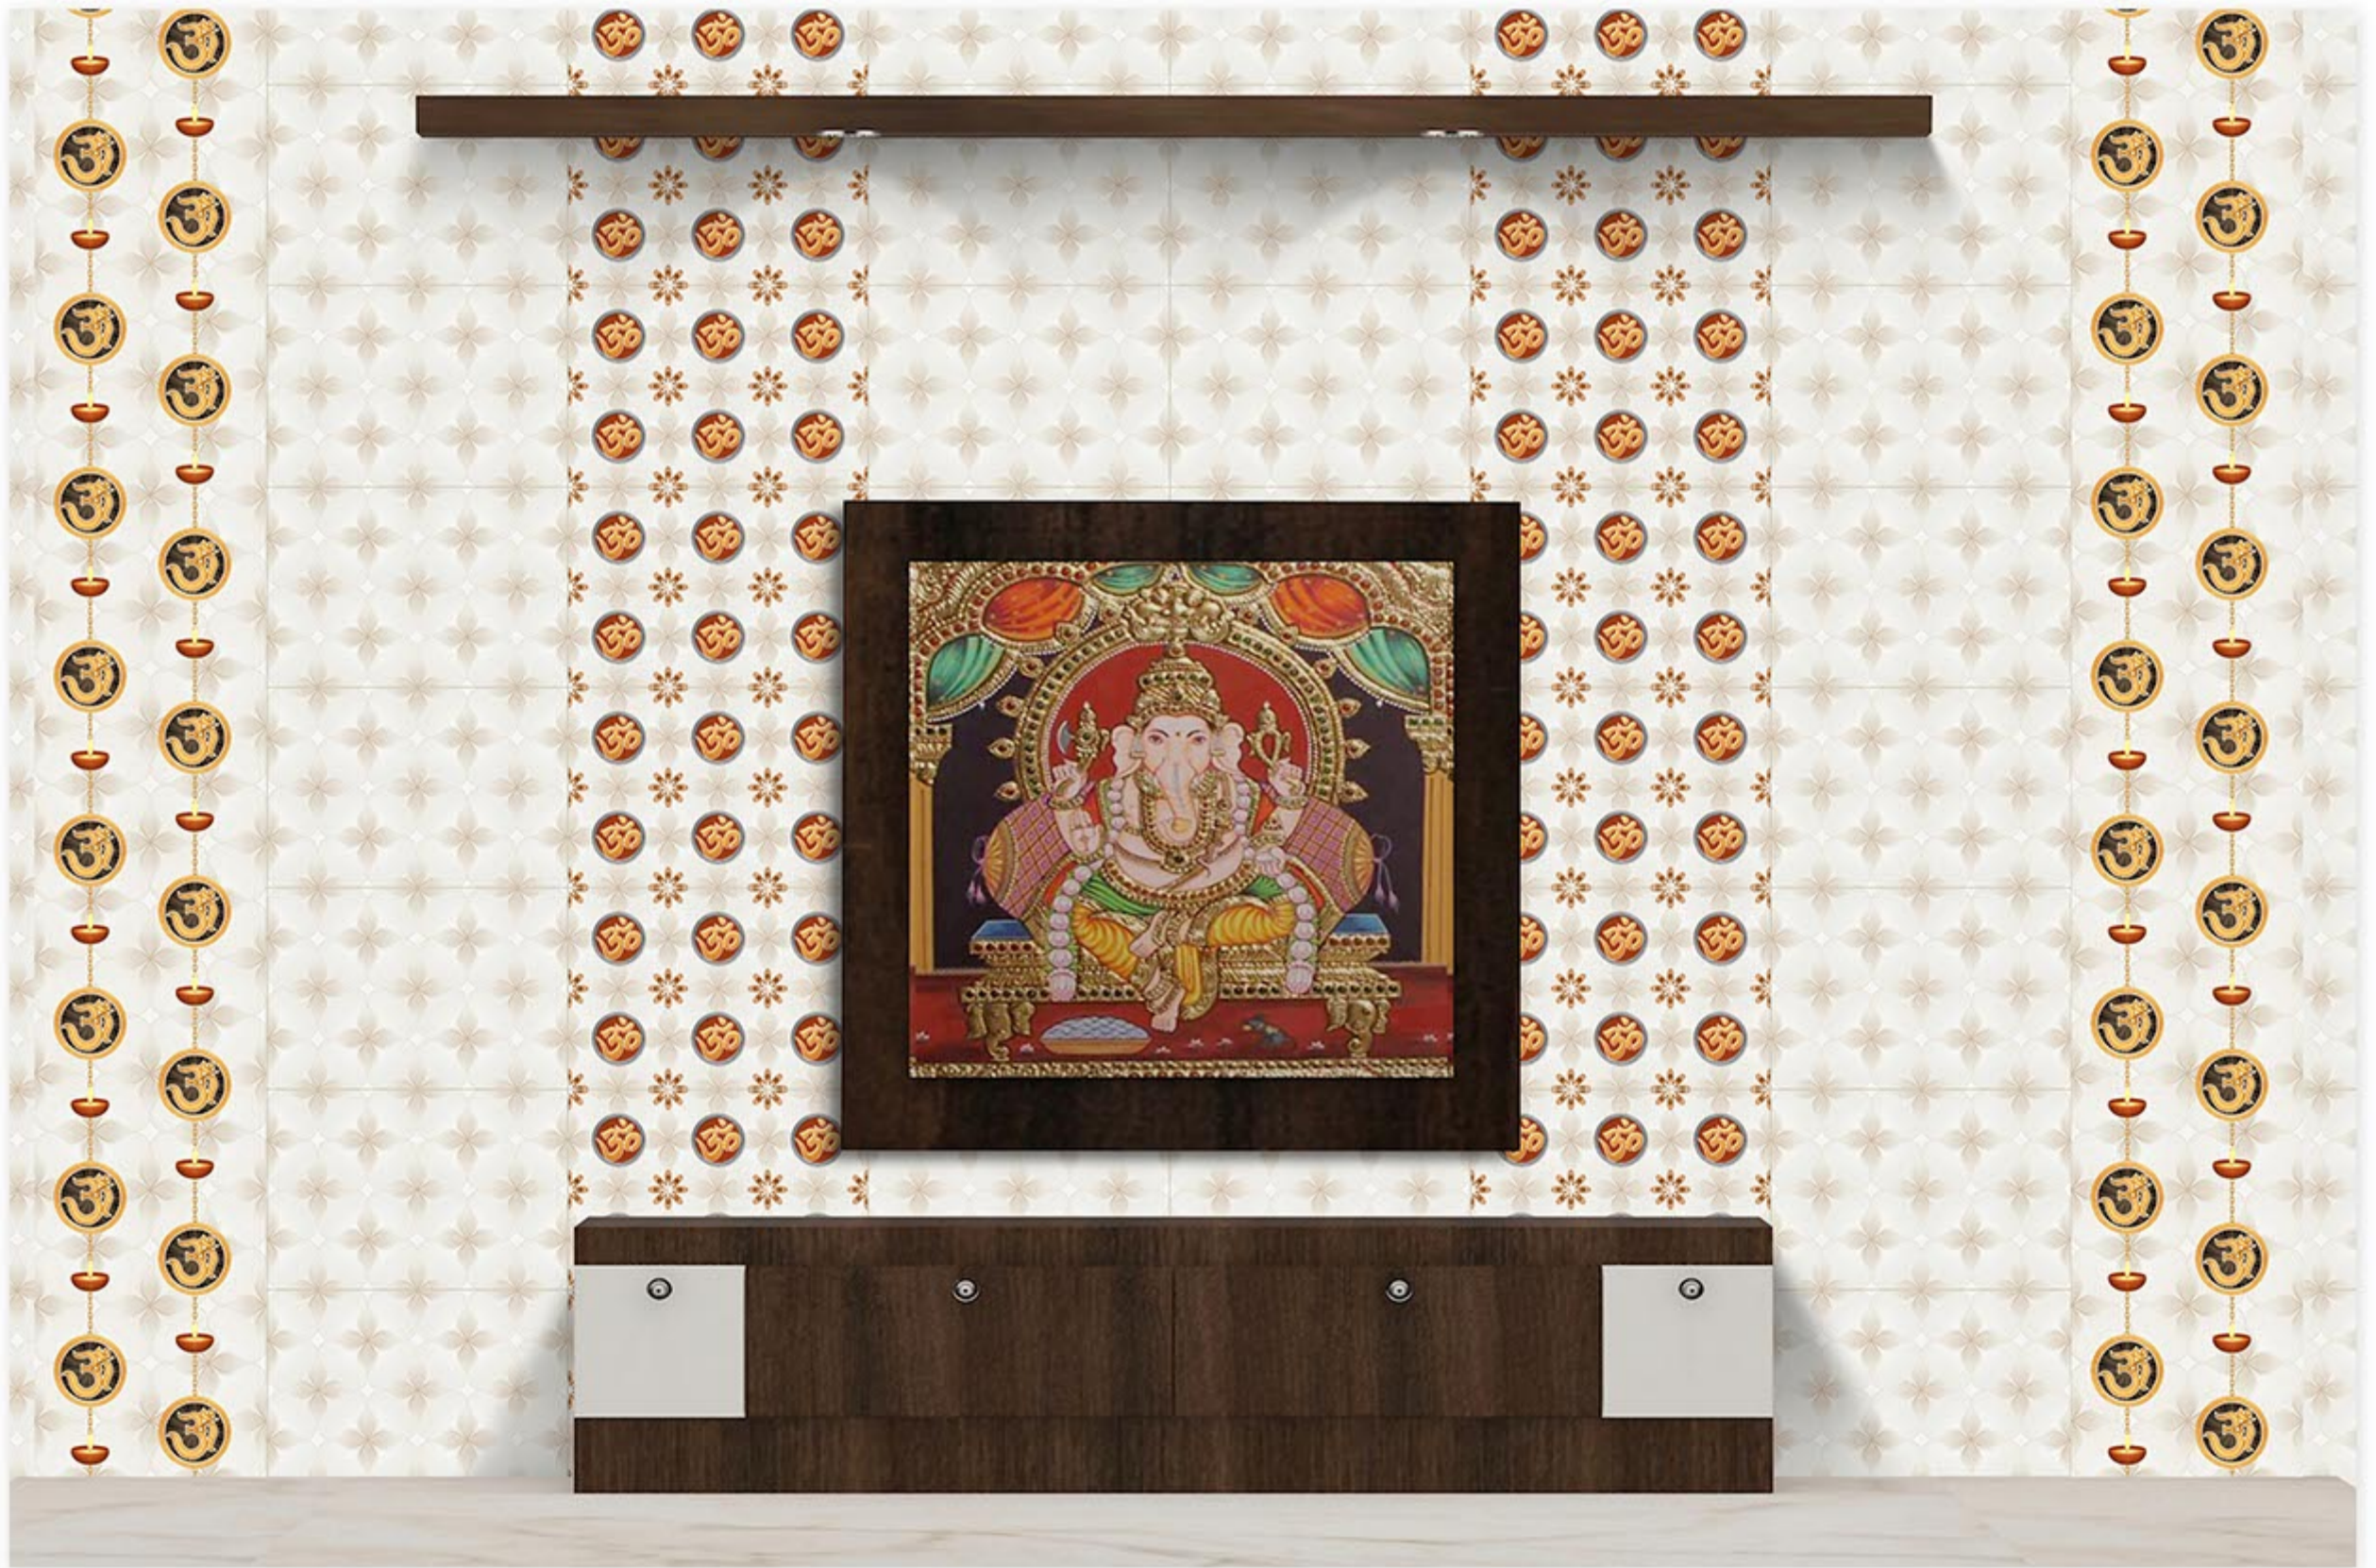

P-1054-HL-2



P-1054-LT



P-1054-HL-1





TECHNICAL SPECIFICATION

CHARACTERISTICS	EURO STANDARDS EN - 159/IS 13753	FLORICE VALUES
DIMENSION & SURFACE QUALITY		
1 Dimension & Surface Quality	±0.5%	±0.2%
2 Deviation in Thickness	±0.6mm	±0.2mm
3 Straightness of sides	±0.3%	±0.2%
4 Rectangularity	±0.5%	±0.3%
5 Surface Flatness	±0.5%	±0.3%
6 Surface Quality	Min 95%	Min 96%
PHYSICAL PROPERTIES		
1 Water Absorption	>10%	14.17%
2 Bending Strength	>150 Kg/Cm ²	200-250 Kg/Cm ²
3 Scratch hardness (Mohs)	Min 3	Min 3
4 Crazeing	1 Cycle	3 Cycles
CHEMICAL PROPERTIES		
1 Staining Resistance	Min Class 2	Resistance to all Acids and Alkalies & Household Chemicals, except Hydro Flouric Acid
2 Household Chemical	Min Class B	
THERMAL PROPERTIES		
1 Thermal Shock	Resistant to 10 Cycles	CONFORMS
2 Thermal Expansion	Max-9E-06	CONFORMS

PACKING DETAILS

Size	Thickness (Approx)	No. of Tiles	Area Sq. Mtr.	Weight (Approx)
Wall Tiles - 300x450	8.0(Approx)	6	0.81	11.20 Kgs.
Floor Tiles - 300x300	8.0(Approx)	9	0.81	11.20 Kgs.

FLORICE CERAMIC LLP

Survey No. 507/2, B/h. admin Vitrified,
At. Bela (Ranpar) Jetpar Road, Morbi - 363642 (Guj.) INDIA

e-mail : floriceceramic@gmail.com

Web. www.floriceceramic.com

Call : +91 95120 23201 / 202 / 203